

ASME B1.1-2024
(Revision of ASME B1.1-2019)

Unified Inch Screw Threads (UN, UNR, and UNJ Thread Forms)

AN AMERICAN NATIONAL STANDARD



**The American Society of
Mechanical Engineers**

ASME B1.1-2024
(Revision of ASME B1.1-2019)

Unified Inch Screw Threads (UN, UNR, and UNJ Thread Forms)

AN AMERICAN NATIONAL STANDARD



**The American Society of
Mechanical Engineers**

Two Park Avenue • New York, NY • 10016 USA

Date of Issuance: June 28, 2024

The next edition of this Standard is scheduled for publication in 2029. This Standard will become effective 1 yr after the Date of Issuance.

This code or standard was developed under procedures accredited as meeting the criteria for American National Standards. The standards committee that approved the code or standard was balanced to ensure that individuals from competent and concerned interests had an opportunity to participate. The proposed code or standard was made available for public review and comment, which provided an opportunity for additional public input from industry, academia, regulatory agencies, and the public-at-large.

ASME does not “approve,” “certify,” “rate,” or “endorse” any item, construction, proprietary device, or activity. ASME does not take any position with respect to the validity of any patent rights asserted in connection with any items mentioned in this document, and does not undertake to insure anyone utilizing a standard against liability for infringement of any applicable letters patent, nor does ASME assume any such liability. Users of a code or standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, is entirely their own responsibility.

Participation by federal agency representatives or persons affiliated with industry is not to be interpreted as government or industry endorsement of this code or standard.

ASME accepts responsibility for only those interpretations of this document issued in accordance with the established ASME procedures and policies, which precludes the issuance of interpretations by individuals.

The endnotes and preamble in this document (if any) are part of this American National Standard.



ASME Collective Membership Mark

All rights reserved. “ASME” and the above ASME symbol are registered trademarks of The American Society of Mechanical Engineers. No part of this document may be copied, modified, distributed, published, displayed, or otherwise reproduced in any form or by any means, electronic, digital, or mechanical, now known or hereafter invented, without the express written permission of ASME. No works derived from this document or any content therein may be created without the express written permission of ASME. Using this document or any content therein to train, create, or improve any artificial intelligence and/or machine learning platform, system, application, model, or algorithm is strictly prohibited.

The American Society of Mechanical Engineers
Two Park Avenue, New York, NY 10016-5990

Copyright © 2024 by
THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS
Printed in U.S.A.

CONTENTS

Foreword	v
Committee Roster	viii
Correspondence With the B1 Committee	ix
1 General	1
2 Screw Thread Profile	3
3 Screw Thread Series	10
4 Screw Thread Classes	15
5 Screw Thread Allowance and Tolerance	80
6 Screw Thread Designation	110
7 Dimensional Accommodation of Coating or Plating for 60-deg Threads	113
8 Limits of Size for Standard (UN, UNR, and UNJ) and Special (UNS, UNRS, and UNJS) Series of Threads	119
9 Thread Form Tolerances	123
10 Formulas and Nomenclature for Thread Form	124
11 Tables of Basic Dimensions	125
Nonmandatory Appendices	
A Terminology and Identification of Unified Inch Screw Threads	161
B Thread Strength Design Formulas	164
C Unified Inch Screw Threads — Metric Translation	165
D Special Threads	166
E Changes to ASME B1.1-1989, Tables 3A and 3B	175
F Special Lengths of Engagement Specifications and Designations	193
Figures	
1 Illustration of Assembly Interference of UNJ-3A Thread and UN-3B Thread in the Maximum Material Condition	2
2 Basic Profile for UN and UNR Screw Threads	4
3 Basic Profile for UNJ Screw Threads	4
4 Root Radius of UNJ External Thread	5
5 Disposition of Diametral Tolerances, Allowance, and Crest Clearance for Unified Inch Screw Thread Series UN, Classes 1A, 2A, 1B, and 2B	6
6 Disposition of Diametral Tolerances and Crest Clearance for Unified Inch Screw Thread Series UN, Classes 3A and 3B	7
7 Disposition of Diametral Tolerances, Allowance, and Crest Clearance for Unified Inch Screw Thread Series UNR, Classes 1A and 2A, and Series UN, Classes 1B and 2B	8
8 Disposition of Diametral Tolerances and Crest Clearance for Unified Inch Screw Thread Series UNR, Class 3A and Series UN, Class 3B	9
9 External UNJ Thread Design Profile and Tolerances	11

10	Disposition of Diametral Tolerances, Allowance, and Crest Clearance for Unified Inch Screw Thread Series UNJ, Classes 2A and 2B	12
11	Disposition of Diametral Tolerances and Crest Clearance for Unified Inch Screw Thread Series UNJ, Classes 3A and 3B	13
12	Internal UNJ Thread Design Profile and Tolerances	14
13	Basic Method of Designating Screw Threads	14
14	Ratio of Pitch Diameter Change to Thickness of Coating on 60-deg Threads	115
15	Effect of Electrodeposited Coating on 60-deg External Threads	116
16	Application of General Thread Symbols	120
A-1	Identification of 60-deg Inch Screw Threads Within the Scope of the ASME B1 Committee . .	162

Tables

1	Standard Series Threads (UN, UNR, and UNJ)	16
2A	Limits of Size for Standard Series External Threads (UN, UNR, and UNJ)	18
2B	Limits of Size for Standard Series Internal Threads (UN and UNJ)	47
3	Allowable Variations in Lead and Equivalent Change in Functional Diameter	82
4	Increments in Pitch Diameter Tolerance — Class 2A ($PD \text{ Tolerance} = 0.0015 \sqrt[3]{D} + 0.0015\sqrt{LE} + 0.015 \sqrt[3]{P^2}$)	104
5	Basic Profile and Constants for Calculation Formulas of Thread Dimensions, in.	106
6	Basic Dimensions for Coarse-Thread Series (UNC, UNRC, and UNJC)	126
7	Basic Dimensions for Fine-Thread Series (UNF, UNRF, and UNJF)	128
8	Basic Dimensions for Extra-Fine-Thread Series (UNEF, UNREF, and UNJEF)	129
9	Basic Dimensions for 4-Thread Series (UN, UNR, and UNJ)	131
10	Basic Dimensions for 6-Thread Series (UN, UNR, and UNJ)	133
11	Basic Dimensions for 8-Thread Series (UN, UNR, and UNJ)	135
12	Basic Dimensions for 12-Thread Series (UN, UNR, and UNJ)	137
13	Basic Dimensions for 16-Thread Series (UN, UNR, and UNJ)	140
14	Basic Dimensions for 20-Thread Series (UN, UNR, and UNJ)	143
15	Basic Dimensions for 28-Thread Series (UN, UNR, and UNJ)	145
16	Basic Dimensions for 32-Thread Series (UN, UNR, and UNJ)	146
17A	Outline Guide for Determining Limits of Size of External Threads	147
17B	Outline Guide for Determining Limits of Size of Internal Threads	147
18A	Examples of External 2A Screw Threads	148
18B	Example of External 3A Screw Threads	150
18C	Examples of Internal 2B Screw Threads	153
18D	Example of Internal 3B Screw Threads	155
19	Allowable Variation in 30-deg Basic Half Angle of External and Internal Screw Threads	158
20	Nomenclature	159
A-1	Identification of 60-deg Inch Screw Threads Within the Scope of the ASME B1 Committee . .	163
D-1	Limits of Size for Selected Combinations of UNS/UNRS Series Threads	167
E-1	Limits of Size for Standard Series Internal and External Threads as Listed in Table 3A of ASME B1.1-1989	176
E-2	Limits as Listed in Table D-1 (Formerly 3B) Prior to ASME B1.1-2003 Edition	187

FOREWORD

ASME B1.1, Unified Inch Screw Threads, is an integrated system of threads for fastening purposes in mechanisms and structures. Its outstanding characteristic is its general interchangeability of threads, achieved through the standardization of thread form, diameter-pitch combinations, and limits of size.

This Standard is the outgrowth of and supersedes previous editions that were published as ASME B1-1924, ASME B1.1-1935, ASME B1.1-1949, ASME B1.1-1960, ASME B1.1-1974, ASME B1.1-1982, ASME B1.1-1989, ASME B1.1-2003, and ASME B1.1-2019.

The achievements represented by ASME B1.1 in development, standardization, and unification are the result of the cooperation and coordination of many organizations, including The American Society of Mechanical Engineers (ASME), SAE International (formerly Society of Automotive Engineers), National Institute of Science and Technology (formerly National Bureau of Standards), Committee B1, the former National Screw Thread Commission, the former Interdepartmental Screw Thread Committee, British Standards Institution, CSA Group (formerly Canadian Standards Association), and American National Standards Institute (ANSI).

This Standard has its basis in the work done more than a century ago by William Sellers in the United States and Sir Joseph Whitworth in Great Britain. Through the intervening years, there have been many developments and revisions, culminating in the Unified Thread Standard approved and adopted for use by all inch-using countries.

The unification of screw thread standards meets the need for interchangeability among the billions of fasteners made in different countries and used in the complex equipment of modern technology. Unification is equally important for the international trade in mechanisms of all kinds and the servicing of transportation equipment that moves from country to country. Unification is therefore not only highly advantageous but also essential.

Complete unification of certain thread series and six tolerance classes in sizes $\frac{1}{4}$ in. and larger was achieved with the signing of an accord in Washington, D.C., on November 18, 1948. Since that time, unification has extended to smaller sizes.

Developed by Technical Committee No. 1 of the International Organization for Standardization (ISO), the unified inch standard that was adopted as ISO 5864 is parallel to the ISO metric screw thread system. Both systems have a common basic profile. The standard was subject to Quadripartite Standardization Agreement (QSTAG) 247 in the ABCA Army Standardization Program of America, Britain, Canada, and Australia.

Throughout this history, special attention has been given to the practical aspects of thread standardization, and many details of ASME B1.1 result from studies and tests based on real-world use. For example, users communicated the need for free assembly in high-production industries and the desirability of providing for threads that require a coating. The tolerance Classes 2A and 2B were developed to meet these two major requirements as well as to provide a general standard for externally and internally threaded fasteners. Thread symbols and nomenclature are now consistent with ASME B1.7. Thread acceptability now follows ASME B1.3.

In 1992, ASME B1.30 implemented eight-place decimal and rounding rules that are mandatory for all new editions and future revisions of ASME B1 documents. To comply with this decision, ASME B1.1-2003 revised some of the values in Table 2 and created [Nonmandatory Appendix E, Table E-1](#), which identifies and lists the revised dimensions from Table 2 in ASME B1.1-1989. The majority of the dimensional changes are within ± 0.0001 in. As stated in [para. 8.2.1](#), the values in this former Table 2, now [Tables 2A and 2B](#), and [Table E-1](#) should be considered acceptable until a future revision of this Standard makes the values in [Tables 2A and 2B](#) the only acceptable values.

ASME B1.1-1992 also moved Table 3B, which provided calculated values for various UNS (unified specials), to [Nonmandatory Appendix D](#). The ASME B1 Committee strongly urges users to adopt the standard thread sizes in [Tables 2A and 2B](#) instead of those listed in [Table D-1](#). ASME B1.1-1992 also moved Tables 31 through 40, which include some values that differed from those derived by use of the formulas in [sections 5 and 8](#), to [Nonmandatory Appendix D](#) and redesignated these Tables D-2 through D-11. (All future special threads should be based on calculations only.)

In addition, ASME B1.1-1992 eliminated all references to thread engagement. Past changes in the thread form designation of the “basic” thread height from $0.7500H$ to $0.62500H$ confused the calculation of percent of thread engagement.

The 1992 edition also included the definition of “functional diameter” and added the term to Table 2 in the same column as “pitch diameter,” since both characteristics have the same limits of size.

Finally, the 1992 edition explained in greater depth the effects of coating on threads (see [section 7](#)).

Changes to the 2019 edition included the splitting of ASME B1.1-2003, Table 2, which contained values for both internal and external threads for UN and UNR only, into two tables, [Table 2A](#), Limits of Size for Standard Series External Threads (UN, UNR, and UNJ), and [Table 2B](#), Limits of Size for Standard Series Internal Threads (UN, UNR, and UNJ). The metric translation of this Standard was removed, as were Tables D-2 through D-11.

The UNJ thread profile, formerly defined in ASME B1.15, was added to ASME B1.1-2019. Following the U.S. Department of Defense (DoD) approval of SAE AS8879C-2003, ASME B1 Subcommittee 15 recognized it would become the standard used by the aerospace industry for this thread form. As a result, Subcommittee 15 recommended that the technical information from ASME B1.15 be included in ASME B1.1 for nonaerospace applications.

The UNJ thread form having the enlarged root radius in the external thread was introduced to minimize size and weight in parts for applications requiring high-fatigue strength under high working-stress levels, as in aerospace applications. It is also appropriate for designs in commercial products where stresses are critical. To meet these requirements, the UNJ external thread root radius is designed to be between $0.15011107P$ and $0.18042196P$ and the minor diameter of the mating internal thread is increased to ensure the necessary clearance.

This Standard includes Classes 2A and 2B UNJ screw threads. Either Class 2A or Class 3A UNJ threads are appropriate for commercial applications commensurate with the fatigue and stress levels required.

The UNJ thread form is the UN thread form modified to $0.48713929P$ ($0.562500H$), which allows the $0.18042196P$ maximum root radius in the external thread. The first known U.S. standard of similar thread form was SAE AS82, published in March 1942, which describes a modified American National thread form to 75% h basic thread depth and specifies $0.10800P$ to $0.1800P$ root radius in the external thread. This thread was symbolized NR, National Round, and was developed for aircraft engine applications.

Tension fatigue testing of aircraft fasteners in 1942 demonstrated the importance of the external thread root contour in the fatigue life of a screw thread rolled after heat treatment. Fatigue testing isolated the elements of good external thread root design. The root should be radiused, not sharp. Theoretically, it should be a continuous circular arc, blending smoothly with the thread flanks. The radius should be as large as possible within the allowable design form. The root contour should also be smooth throughout and free of any imperfections, tool marks, or other minor notches.

Recognizing the need for improved 160,000 psi tensile strength bolts, the DoD published MIL-B-7838A, the bolt procurement specification for aircraft applications based on the unified thread form of $0.62500H$, in April 1952, thus acknowledging that a larger external root radius requires a shallower internal thread depth to clear the flank tangency point.

The root radius of the external thread was increased to $0.15011107P$ minimum and $0.18042196P$ maximum for the 180,000 psi and higher tensile strength bolts. This external thread form was developed in 1955 by the aerospace fastener industry and was known as the “Hi R” thread form.

Through coordinated effort with the SAE E-25 Engine and Propeller Standard Utility Parts Committee and the Aerospace Industries Association National Aerospace Standards Committee (NASC), the DoD developed and published in September 1960 the thread specification MIL-S-8879, which features the “Hi R” thread root radius in the external thread and the internal thread modified to $0.48713929P$ ($0.562500H$) basic. In aircraft gas turbine engines, the high-temperature threaded fasteners exhibited better elevated temperature performance using MIL-S-8879 UNJ thread root radius, as the stress-rupture life of bolts was greatly improved.

The UNJ thread form has been adopted by the aerospace industry as the all-purpose thread standard, except for electrical hardware and thread sizes 0.1380 and smaller, which may use the UN thread form.

The UNJ profile as defined in this Standard is similar to SAE AS8879C-2003 (superseding MIL-S-8879C) and equivalent to ISO 3161:1977 for thread Classes 3A and 3B. British Standards Institution BS 4084:1978, including Amendment 1, is technically identical to ISO 3161:1977, except for Appendix A, which provides information for a 20-UNJ constant pitch series for diameters through 3 in.

Changes to ASME B1.1-2024 include the following:

- (a) correction of TD_2 to Td_2 in four places.
- (b) correction of six minimum PD values in [Table 2A](#) by 0.0001.
- (c) changing values of UNR max. minor diameter in [Table 2A](#), column 13, due to a change in the $2h_s$ constant from 1.19078493 P to 1.22686932 P .
- (d) correction to the formula at the bottom of [Tables 6](#) through [16](#) for the area at the minor diameter. Values in the applicable column in the tables were correct; the formula was written incorrectly. Therefore, $\pi[(D - 2h_b/2)^2]$ is corrected to $\pi[(D - 2h_b)/2]^2$.
- (e) revision of three notes pertaining to UNR in [Figure 8](#), for better explanation and clarification.
- (f) changing the wording of [para. 5.2](#) so the length of engagement to be used is now defined. Previously, there was no length of engagement stated for the calculation of Classes 1A and 1B for 4-UN, 6-UN, and 8-UN threads.
- (g) addition of a dotted line to [Figure 12](#), so “ D min. = D bsc” is not interpreted as requiring a radius.

(h) the following corrections to [Table 18A](#):

(1) TD_2 to Td_2 in one place

(2) use of four decimal places rather than six in line (4)

(3) correction of “0.5000-23” to “0.5000-28” in table header

(i) deletion of references to H in [section 10](#). ASME B1 volumes stopped using references to H in 2003. If the equivalent H values are needed, they can be found in [Table 5](#). Other errors related to the use of H , including wrong values, incorrect references, and formulas written incorrectly, are also corrected in [section 10](#).

(j) revisions in [para. 10\(f\)](#), of UNR h_s from $0.59539247P$ to $0.61343466P$ and in [para. 10\(r\)](#) of UNR $2h_s$ from $1.19078493P$ to $1.22686932P$.

ASME B1.1-2024 was approved by ANSI on May 7, 2024.

ASME B1 COMMITTEE

Standardization and Unification of Screw Threads

(The following is the roster of the committee at the time of approval of this Standard.)

STANDARDS COMMITTEE OFFICERS

A. L. Barrows, *Chair*
P. Larouche, *Vice Chair*
S. Khan, *Secretary*

STANDARDS COMMITTEE PERSONNEL

A. L. Barrows, Swanson Tool Manufacturing, Inc.
K. Bly, Consultant
L. Borowski, Greenslade & Co., Inc.
G. A. Cuccio, Capitol Manufacturing Co.
R. Dodge, Pennoyer Dodge Co.
D. Everett, National Institute of Standards and Technology
J. O. Gehret III, Gehret Gage, LLC
J. R. Gervasi, Kerr Lakeside, Inc.
P. Holahan, Fastenal Co.
S. Khan, The American Society of Mechanical Engineers

D. D. Katz, Precision Fittings, LLC
P. Larouche, Johnson Gage Co.
D. R. Maisch, PMC Lone Star
J. R. Popovic, Cleveland Specialty Inspection Services, Inc.
M. W. Rose, Glastonbury Southern Gage
L. C. Johnson, *Alternate*, Johnson Gage Co.
R. J. Hukari, *Contributing Member*, SPS Technologies
D. R. Oas, *Contributing Member*, Seaway Bolt & Specials Corp.
R. D. Strong, *Contributing Member*, Consultant

SUBCOMMITTEE 1 — UNIFIED SCREW THREADS

A. L. Barrows, *Chair*, Swanson Tool Manufacturing, Inc.
K. Bly, *Vice Chair*, Consultant
L. Borowski, Greenslade & Co., Inc.
R. Dodge, Pennoyer Dodge Co.
J. R. Gervasi, Kerr Lakeside, Inc.
P. Holahan, Fastenal Co.
L. C. Johnson, Johnson Gage Co.
P. Larouche, Johnson Gage Co.

S. Brahimi, *Contributing Member*, Industrial Fasteners Institute
R. J. Hukari, *Contributing Member*, SPS Technologies
J. C. Jennings, *Contributing Member*, Naval Surface Warfare Center, Philadelphia Division
X. Li, *Contributing Member*, China Productivity Center for Machinery Industry
R. D. Strong, *Contributing Member*, Consultant

CORRESPONDENCE WITH THE B1 COMMITTEE

General. ASME codes and standards are developed and maintained by committees with the intent to represent the consensus of concerned interests. Users of ASME codes and standards may correspond with the committees to propose revisions or cases, report errata, or request interpretations. Correspondence for this Standard should be sent to the staff secretary noted on the committee's web page, accessible at <https://go.asme.org/B1committee>.

Revisions and Errata. The committee processes revisions to this Standard on a continuous basis to incorporate changes that appear necessary or desirable as demonstrated by the experience gained from the application of the Standard. Approved revisions will be published in the next edition of the Standard.

In addition, the committee may post errata on the committee web page. Errata become effective on the date posted. Users can register on the committee web page to receive e-mail notifications of posted errata.

This Standard is always open for comment, and the committee welcomes proposals for revisions. Such proposals should be as specific as possible, citing the paragraph number, the proposed wording, and a detailed description of the reasons for the proposal, including any pertinent background information and supporting documentation.

Cases

(a) The most common applications for cases are

(1) to permit early implementation of a revision based on an urgent need

(2) to provide alternative requirements

(3) to allow users to gain experience with alternative or potential additional requirements prior to incorporation directly into the Standard

(4) to permit the use of a new material or process

(b) Users are cautioned that not all jurisdictions or owners automatically accept cases. Cases are not to be considered as approving, recommending, certifying, or endorsing any proprietary or specific design, or as limiting in any way the freedom of manufacturers, constructors, or owners to choose any method of design or any form of construction that conforms to the Standard.

(c) A proposed case shall be written as a question and reply in the same format as existing cases. The proposal shall also include the following information:

(1) a statement of need and background information

(2) the urgency of the case (e.g., the case concerns a project that is underway or imminent)

(3) the Standard and the paragraph, figure, or table number

(4) the editions of the Standard to which the proposed case applies

(d) A case is effective for use when the public review process has been completed and it is approved by the cognizant supervisory board. Approved cases are posted on the committee web page.

Interpretations. The committee does not issue interpretations for this Standard.

Committee Meetings. The B1 Standards Committee regularly holds meetings that are open to the public. Persons wishing to attend any meeting should contact the secretary of the committee. Information on future committee meetings can be found on the committee web page at <https://go.asme.org/B1committee>.

INTENTIONALLY LEFT BLANK

UNIFIED INCH SCREW THREADS (UN, UNR, AND UNJ THREAD FORMS)

1 GENERAL

1.1 Scope

This Standard specifies the thread form, series, class, allowance, tolerance, and designation for unified screw threads. (In order to emphasize that unified screw threads are based on inch modules, they may be denoted unified inch screw threads.) Several variations in thread form have been developed for unified threads; however, this Standard covers only UN, UNR, and UNJ thread forms.

The metric translation of this Standard that was in the 2003 edition has been removed (see [Nonmandatory Appendix C](#)). [Nonmandatory Appendices D](#) through [F](#) contain information that is supplementary to the sections of this Standard.

1.2 Unified Screw Thread Standards

The standards for unified screw threads published in this Standard are in agreement with formal standards of the International Organization for Standardization (ISO) for diameter-pitch combinations, designations, and tolerances for 60-deg triangular form inch screw threads. The unified screw thread symbols UN, UNC, UNF, and UNEF were derived by the addition of the letter “U” preceding the thread symbols used for American National screw threads N, NC, NF, and NEF.

Unified screw threads have their origin in an accord signed in Washington, D.C., on November 18, 1948, by representatives of standardizing bodies of Canada, the United Kingdom, and the United States and have subsequently superseded American National screw threads.

1.3 Thread Forms

UN applies to both internal and external threads. UNR applies only to external threads; the difference between UN and UNR threads, in addition to designation, is that a flat or rounded root contour due to tool wear is specified for UN threads, while only a defined rounded root contour is specified for UNR threads. Basic thread height is 0.54126588*P*.

The UNJ screw thread is designed for use on highly stressed applications requiring high-fatigue strength. For aerospace applications, only Classes 3A and 3B should be used. Basic thread height is only

0.48713929*P* to permit a root radius larger than that of the UN and UNR forms.

1.4 Interchangeability

1.4.1 UN and UNR. Unified (UN/UNR) and its predecessor American National (N) screw threads have substantially the same thread form, and threads of both standards having the same diameter and pitch are mechanically interchangeable. The principal differences between these standards relate to the application of allowances, the variation of tolerances with size, differences in the amounts of pitch diameter tolerances for external and internal threads, and differences in thread designations. Unified inch and ISO metric screw threads are not mechanically interchangeable.

1.4.2 UNJ. UN and UNJ threads are interchangeable with the exception of UNJ-3A external threads, which at maximum material condition will not assemble with a UN internal thread of any class at maximum material condition (see [Figure 1](#)).

1.5 Designations


Unified thread sizes (specific combinations of diameter and pitch shown in [Table 1](#)) are identified by the letter combination “UN” in the thread symbol. In the unified standards, the pitch diameter tolerances for external threads differ from those for internal threads; for this reason the letter “A” is used in the thread symbol to denote an external thread and the letter “B,” an internal thread. Where the letters “U,” “A,” or “B” do not appear in the thread designation, the threads conform to the outdated American National screw threads. Details regarding thread designations are given in [section 6](#).

1.6 References

The following is a list of publications referenced in this Standard. Unless otherwise specified, the latest edition shall apply. The following documents form a part of this Standard to the extent specified herein.

ASME B1.2. Gages and Gaging for Unified Inch Screw Threads. The American Society of Mechanical Engineers.

Figure 1
Illustration of Assembly Interference of UNJ-3A Thread and UN-3B Thread in the Maximum Material Condition

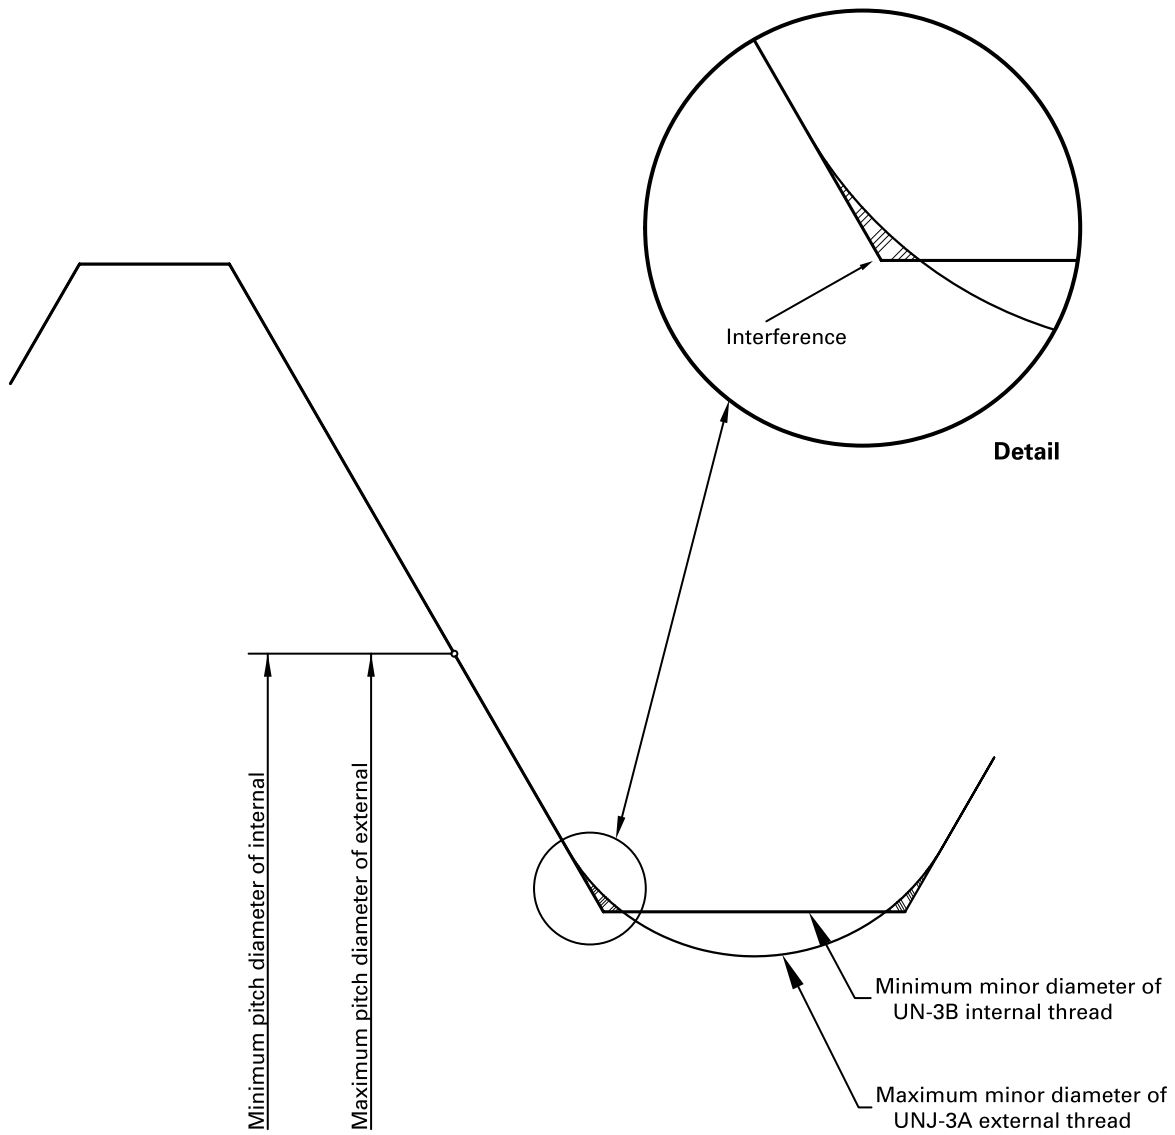

ASME B1.3. Screw Thread Gaging Systems for Acceptability: Inch and Metric Screw Threads. The American Society of Mechanical Engineers.

ASME B1.7. Screw Threads: Nomenclature, Definitions, and Letter Symbols. The American Society of Mechanical Engineers.

ASME B1.30. Screw Threads: Standard Practice for Calculating and Rounding Dimensions. The American Society of Mechanical Engineers.

ASME B47.1. Gage Blanks. The American Society of Mechanical Engineers.

ASME B94.11M. Twist Drills. The American Society of Mechanical Engineers.

ASME Y14.5. Dimensioning and Tolerancing. The American Society of Mechanical Engineers.

FED-STD-H28/2. Screw-Thread Standards for Federal Services. U.S. Department of Defense.

ISO 68. General Purpose Screw Threads — Basic Profile. International Organization for Standardization.

1.7 Acceptability

Acceptability of product threads shall be in accordance with ASME B1.3. Gages and gaging shall be in accordance with ASME B1.2.

1.8 Reference Temperature

The reference temperature is 68°F for dimensions defined by this system.

1.9 Units of Measure

All dimensions in this Standard, including all tables, are in inches unless otherwise specified.

1.10 Federal Government Use

When this Standard is approved by the Department of Defense and federal agencies and is incorporated into FED-STD-H28/2, Screw-Thread Standards for Federal Services, para. 2, the use of this Standard by the federal government will be subject to all the requirements and limitations of FED-STD-H28/2.

2 SCREW THREAD PROFILE

2.1 Scope

The basic profile and design profiles are defined in this section and are the basis of all thread dimensions given in this Standard.

2.2 Basic Profile

2.2.1 UN and UNR. The basic profile for UN screw threads is identical to that for UNR screw threads and is shown in Figure 2. Profile applies to an axial plane.

For reference, the basic profile for UN and UNR screw threads is identical to that for ISO metric screw threads shown in ISO 68.

2.2.2 UNJ. The basic profile for UNJ screw threads is shown in Figure 3. It is the theoretical profile corresponding to the basic dimensions of the thread major diameter, pitch diameter, and minor diameter. This profile includes a $0.15011107P$ to $0.18042196P$ radius at the root of the external thread as shown in Figure 4. This also requires that the minor diameter of the external and internal threads be larger than the UN and UNR thread forms to accommodate the external thread maximum root radius. It is similar to but not the same as the profile for UN and UNR.

2.3 Design Profiles

The design profiles define the maximum material conditions for external and internal threads with no allowance and are derived from the basic profile. The design profiles of both external and internal screw threads vary from the basic profile.

2.3.1 Design Profiles of External Threads

2.3.1.1 UN and UNR. The design profiles of external UN and UNR screw threads are included in Figures 5 through 8. A flat root contour is specified for UN threads; however, it is permissible to provide for some threading tool crest wear. Therefore, a rounded root contour cleared beyond the $0.2500P$ flat width of the basic profile is optional. The rounded root also reduces the rate of threading tool crest wear and improves fatigue strength over that of a flat root thread.

(a) At the least material condition (LMC), the root form of the UNR external thread shall be a full root radius of not less than $0.10825318P$. At maximum material condition (MMC), the root form of the UNR external thread may be one of the following types:

(1) a full root radius of not more than $0.14433757P$, which makes the point of tangency between the radius and the flanks at a point $0.54126588P$ below the basic major diameter (the equivalent of a $0.2500P$ width of flat).

(2) a “rounded form” consisting of a combination of flats and radii not less than $0.10825318P$, as shown in Figures 7 and 8. When the root is the rounded form, the radii may exceed $0.14433757P$ so long as the point of tangency between the radii and the flanks is no less than $0.54126588P$ below the basic major diameter (the equivalent of a $0.2500P$ width of flat).

(b) The design profiles of external UN and UNR screw threads have flat crests. However, in practice, product thread crests may be flat, partially rounded, or fully rounded. A rounded crest tangent at a $0.12500P$ flat is shown as an option in Figures 5 through 8.

Figure 2
Basic Profile for UN and UNR Screw Threads

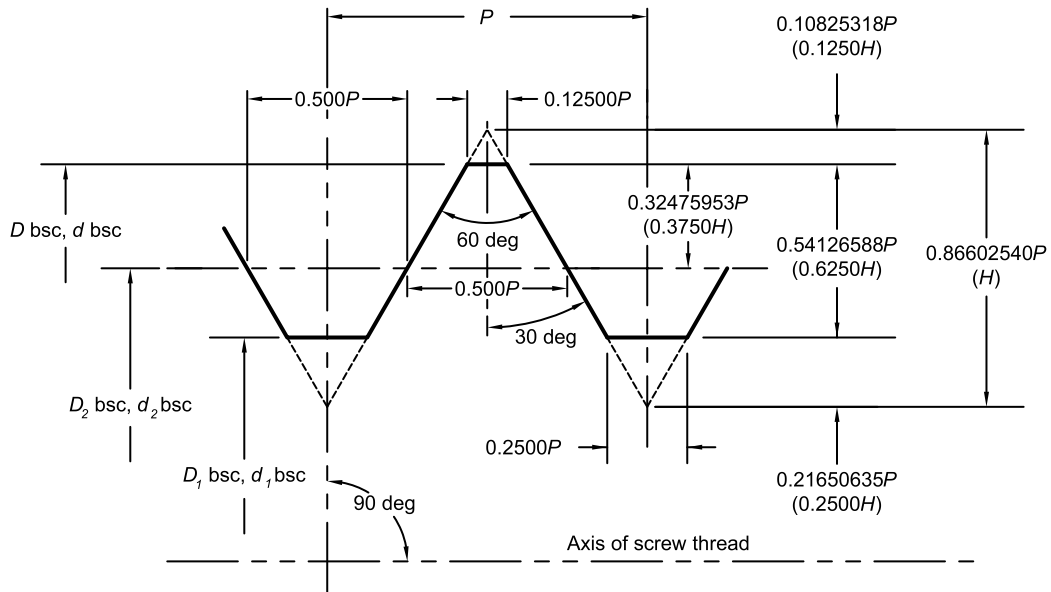


Figure 3
Basic Profile for UNJ Screw Threads


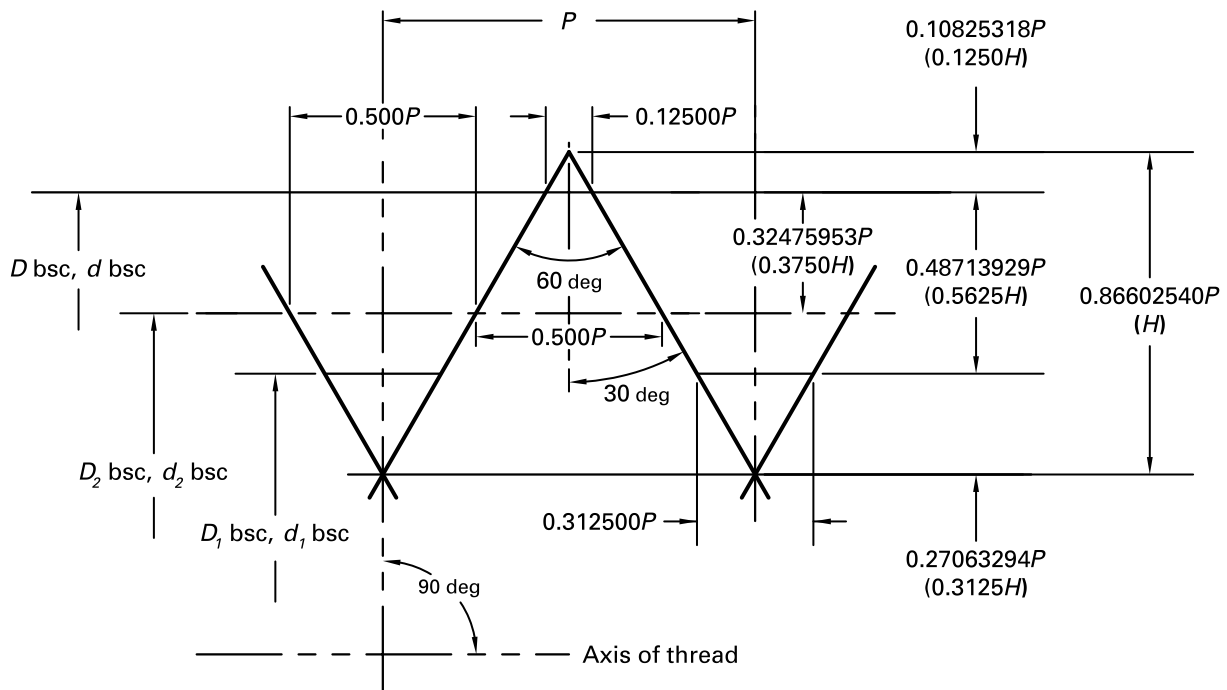



Figure 4
Root Radius of UNJ External Thread

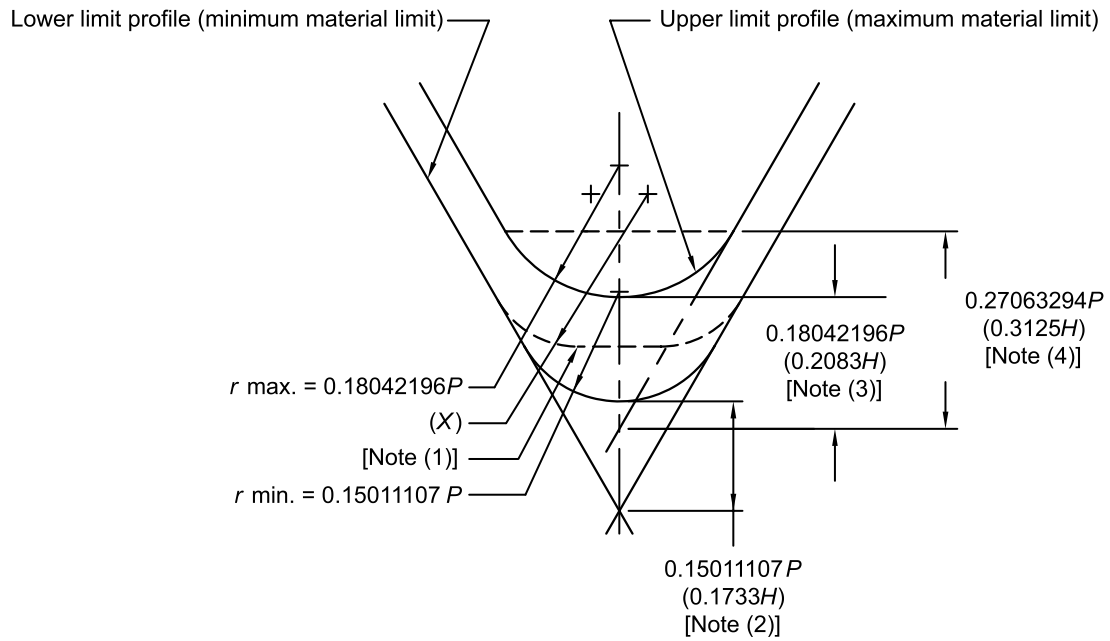

NOTES:


- (1) Optional profile comprised of two circular arcs (X) tangential to the flanks and flat at the root.
- (2) Minimum truncation.
- (3) Maximum truncation.
- (4) Tangent flank radii (minor diameter).

Figure 5
Disposition of Diametral Tolerances, Allowance, and Crest Clearance for Unified Inch Screw Thread Series UN, Classes 1A, 2A, 1B, and 2B

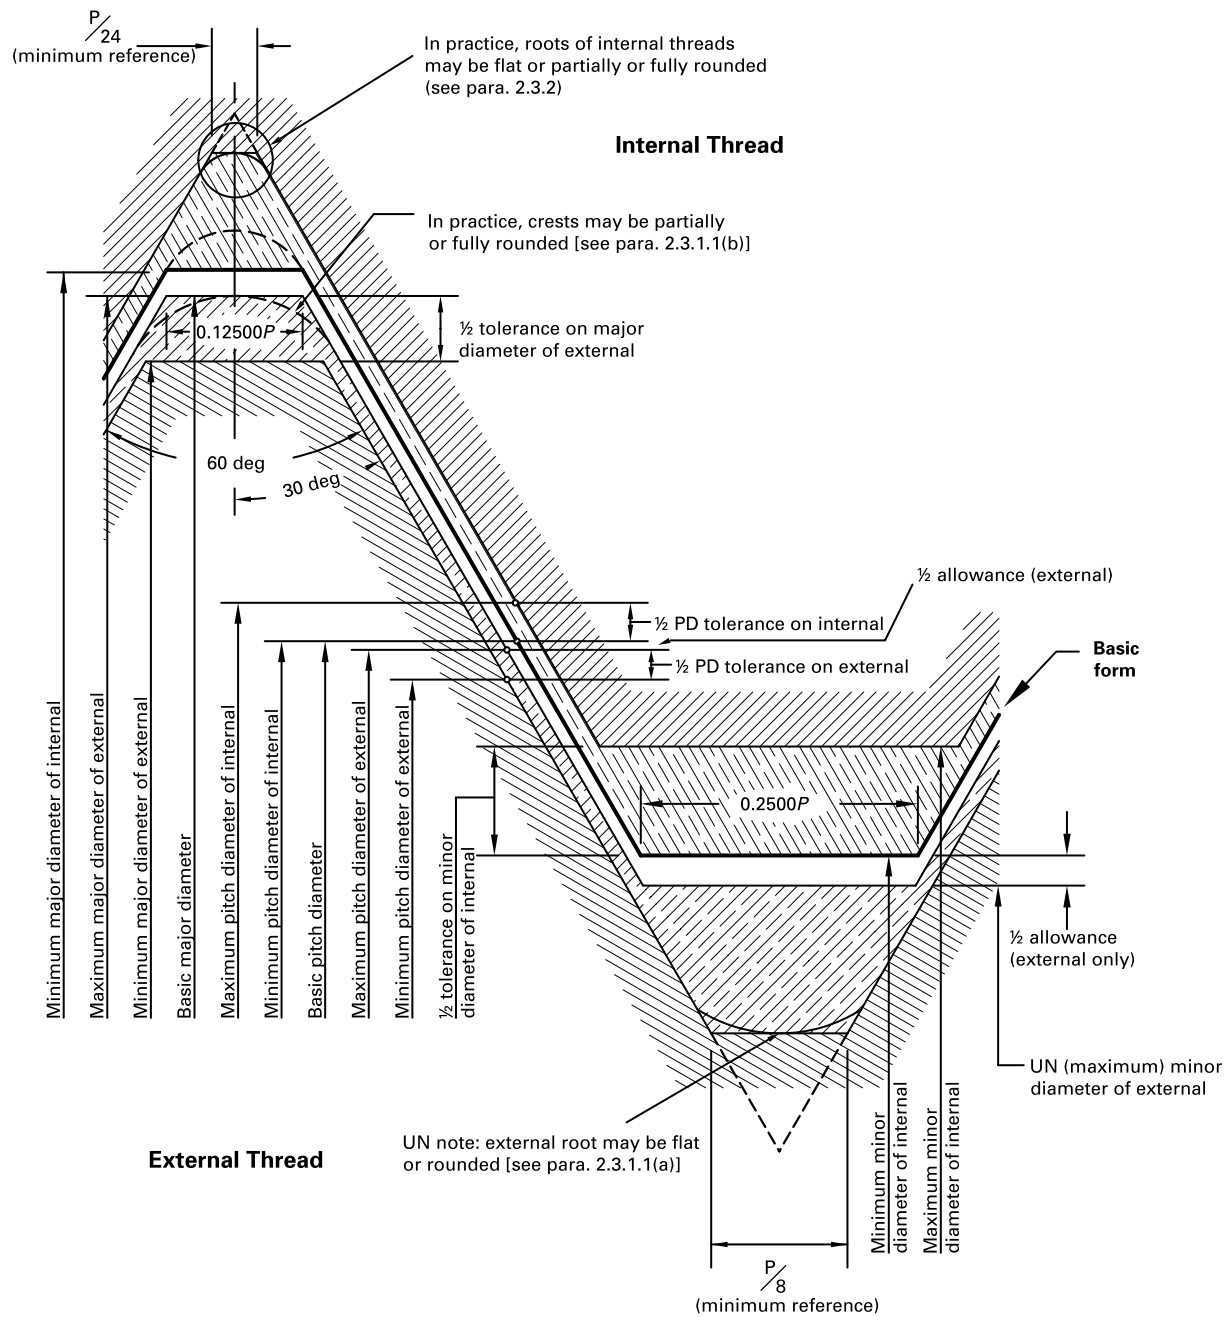


GENERAL NOTE: Lead and angle tolerances are defined in [section 9](#).

Figure 6
Disposition of Diametral Tolerances and Crest Clearance for Unified Inch Screw Thread Series UN,
Classes 3A and 3B

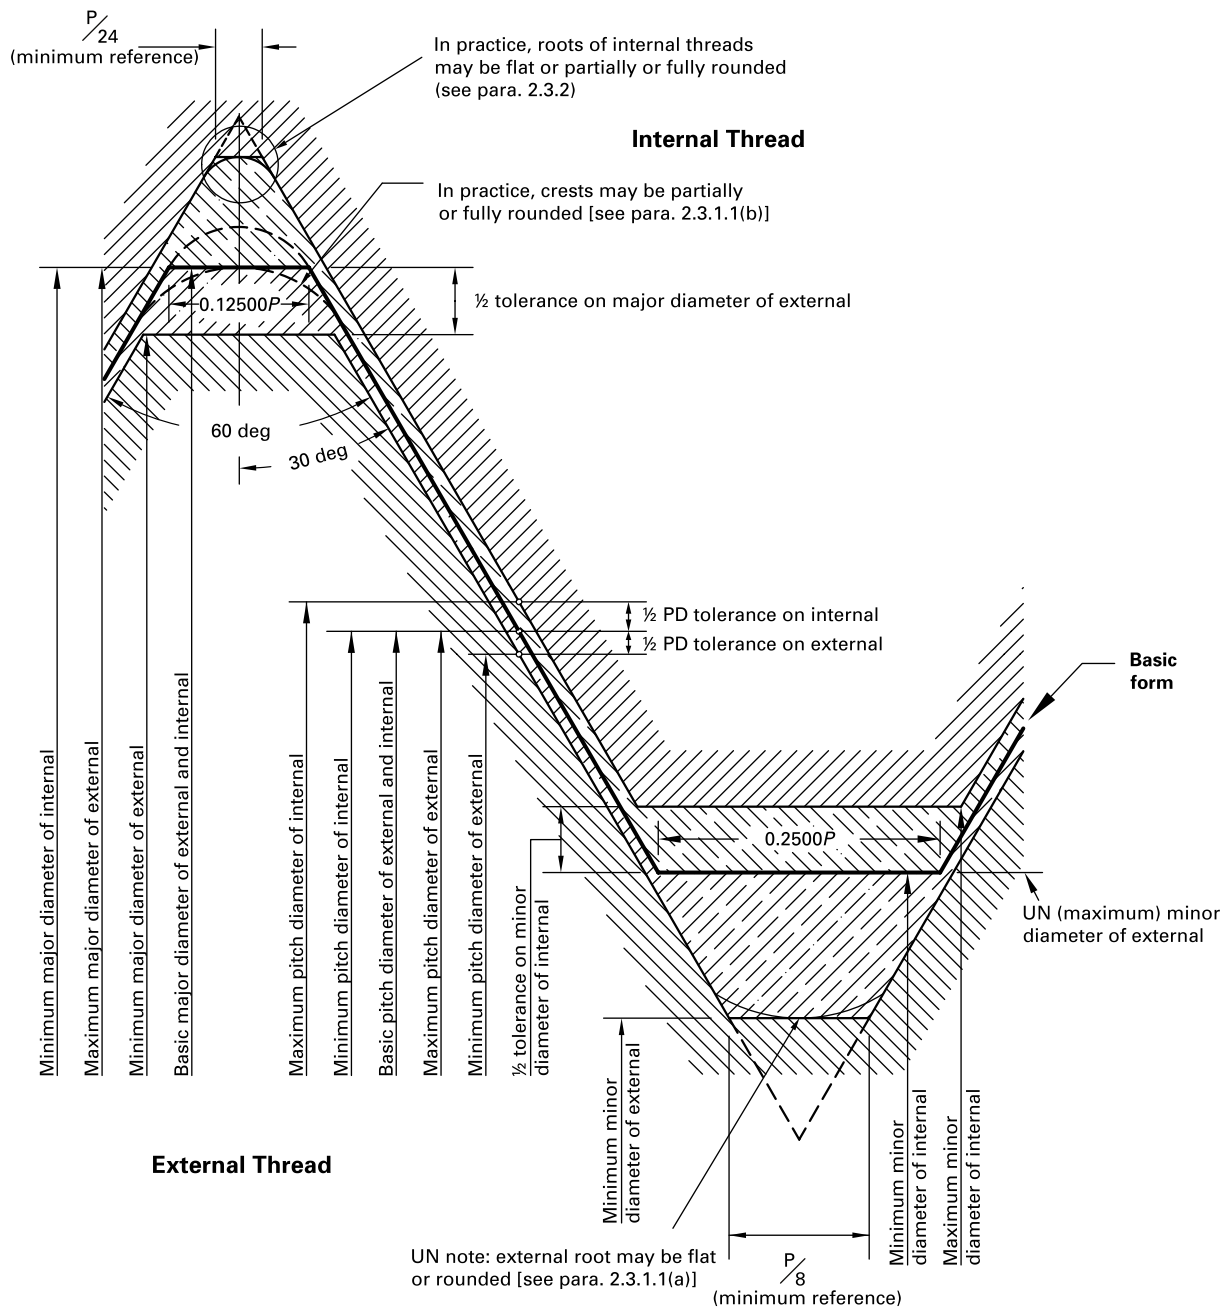


GENERAL NOTE: Lead and angle tolerances are defined in [section 9](#).

Figure 7
Disposition of Diametral Tolerances, Allowance, and Crest Clearance for Unified Inch Screw Thread Series UNR, Classes 1A and 2A, and Series UN, Classes 1B and 2B

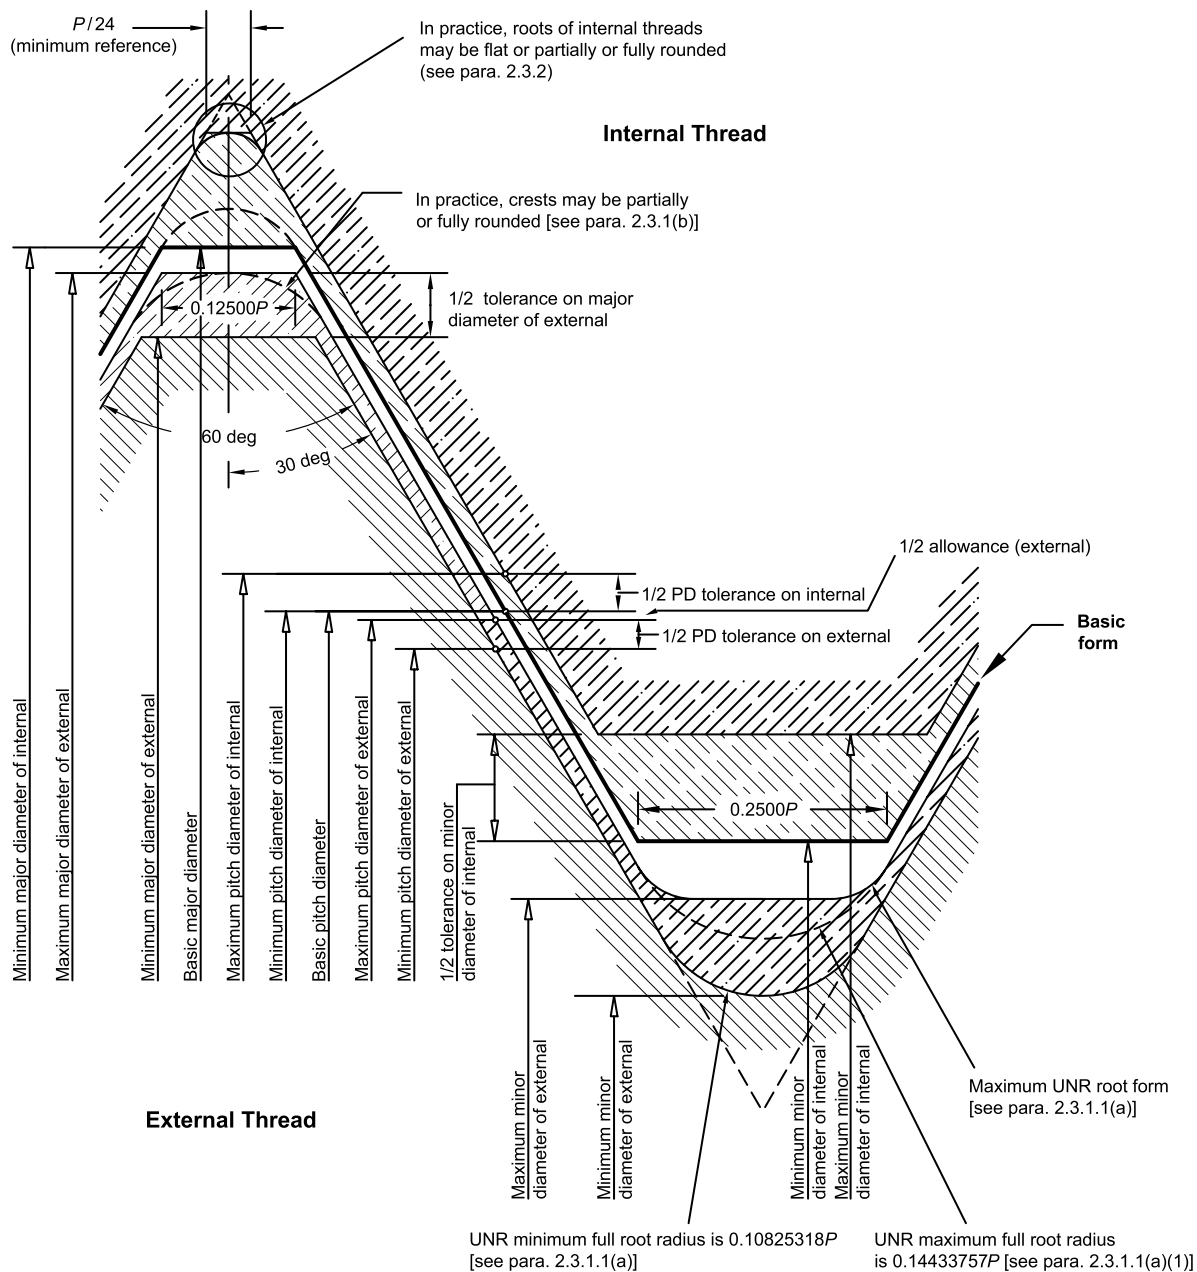

GENERAL NOTE: Lead and angle tolerances are defined in [section 9](#).

Figure 8
Disposition of Diametral Tolerances and Crest Clearance for Unified Inch Screw Thread Series UNR,
Class 3A and Series UN, Class 3B

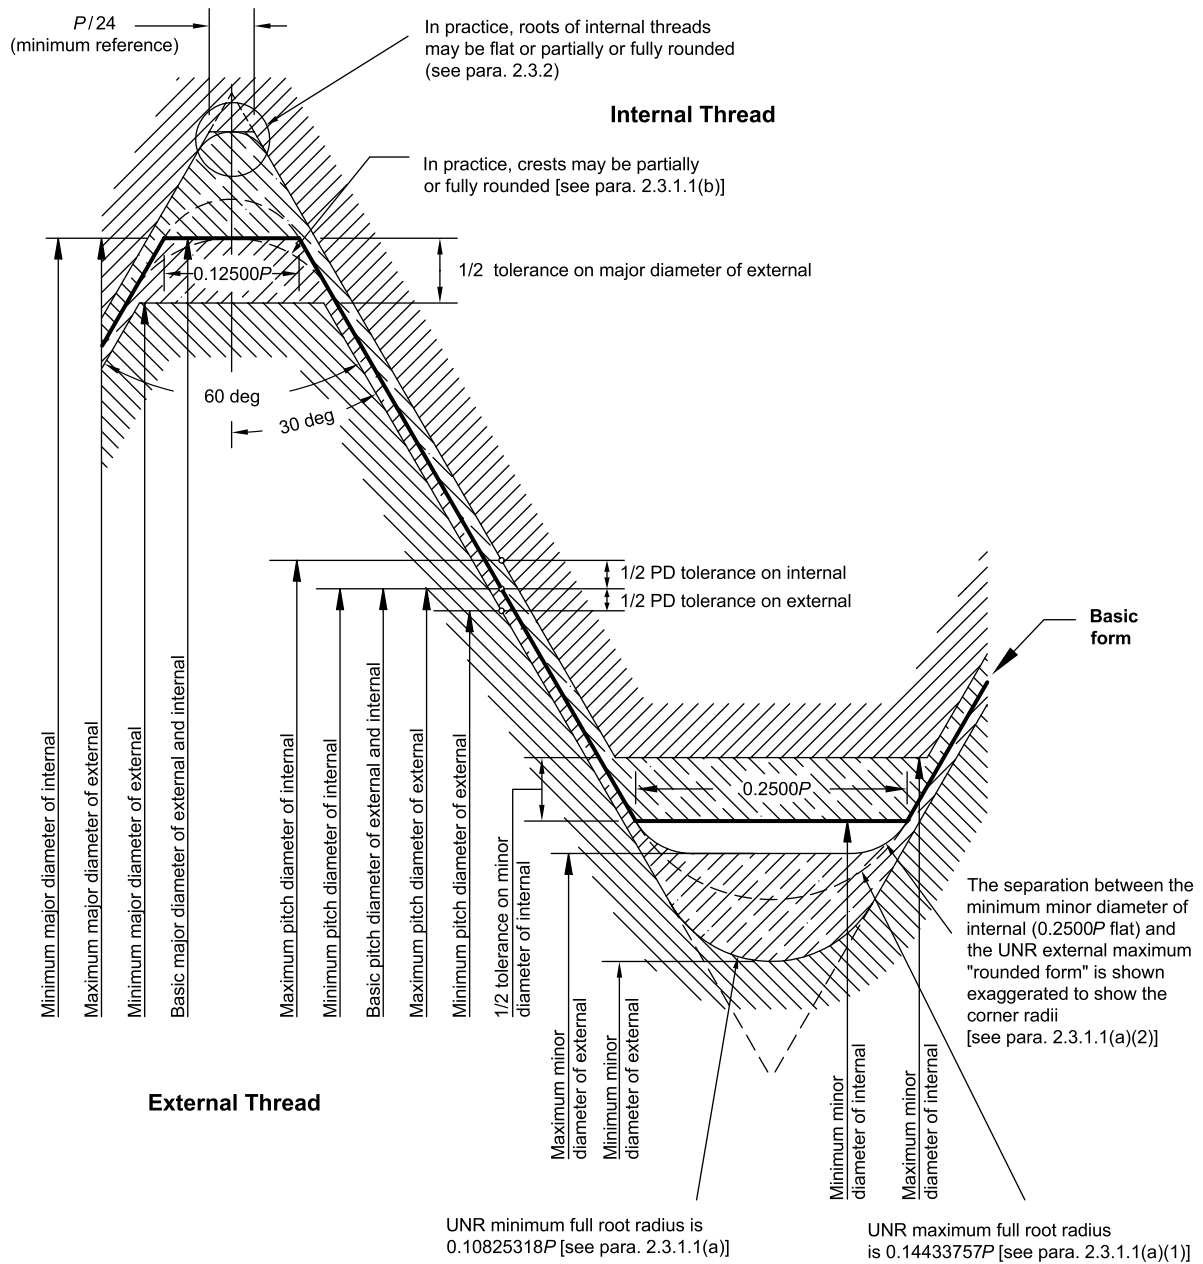

GENERAL NOTE: Lead and angle tolerances are defined in [section 9](#).

2.3.1.2 UNJ. The design profile of the external UNJ screw thread specifies that the actual root of the thread shall lie within the root radius tolerance zone shown in [Figures 4 and 9](#). The limit dimensions of the root radius, r , are shown in [Figures 10 and 11](#) and their values are specified in [Table 2A](#). The profile shall be a continuous smoothly blended non-reversing curve, no part of which shall have a radius of less than $0.15011107P$ and which is tangent to the thread flanks at not less than $0.48713929P$ basic thread depth. The profile may comprise tangent flank circular arcs that are tangent to the flanks and a flat at the minor diameter provided that the minor diameter, d_3 , is within the zone established in [Figures 10 and 11](#). Unless otherwise specified, the runout or incomplete UNJ threads on externally threaded parts shall be no less than 1 pitch nor more than 2 pitches in length. The threads shall run out onto the shank without any abrupt change in cross-sectional area. The root radius shall be no less than the minimum radius of the full thread section.

2.3.2 Design Profile of Internal Threads. The design profiles of the internal UN and UNJ screw threads are included in [Figures 2, 5 through 8, and 10 through 12](#) (there is no internal UNR screw thread). In practice, it is necessary to provide for some threading tool crest wear resulting in a profile that may be flat or partially or fully rounded; therefore, the root of the design profile is rounded and cleared beyond the $0.12500P$ flat width of the basic profile. No root radius is specified.

2.4 Formulas and Nomenclature

The formulas and nomenclature pertaining to the basic profile and the design profiles are given in [section 10](#).

3 SCREW THREAD SERIES

3.1 Thread Series Definition

Thread series are groups of diameter-pitch combinations distinguished from each other by the number of threads per inch applied to a series of specific diameters. There are two general series classifications: standard and special.

3.1.1 Standard Series. The standard series consists of three series with graded pitches (coarse, fine, and extra fine) and eight series with constant pitches (4, 6, 8, 12, 16, 20, 28, and 32 threads per inch). The standard series is shown in [Table 1](#). Limits of size are shown in [Tables 2A and 2B](#) and discussed in [section 8](#).

3.1.2 Special Series. The special series consists of all threads with diameter-pitch combinations that are not included in the standard series. When allowances and tolerances of special series threads are derived from unified formulation as shown in [section 5](#), the threads are designated UNS, UNJS, or UNRS. If allowance and toler-

ance are not derived from unified formulation, the threads are designated “SPL 60-deg Form.” (See [para. 6.1](#) and [Figure 13](#) for details of designation.)

3.2 Order of Selection

Wherever possible, selection should be made from [Table 1](#), preference being given to the coarse- and fine-thread series. As second choice, if the threads in the standard series in [Table 1](#) do not meet the requirements of the design, special thread sizes should be selected from [Table E-1](#) and their limits calculated using the formulas in [section 8](#). The limits in [Table D-1](#) are for reference only and are not recommended for new applications.

3.3 Coarse-Thread Series Applications

The coarse-thread series (UNC, UNRC, or UNJC) is generally used for the bulk production of screws, bolts, and nuts. It is commonly used in materials such as cast iron, aluminum, magnesium, brass, bronze, and plastic, because the coarse-thread series provides more resistance to internal thread stripping than the fine- or extra-fine-thread series. The coarse-thread series is advantageous where rapid assembly or disassembly is required, or if corrosion or damage from nicks due to handling or use is likely.


3.4 Fine-Thread Series Applications

The fine-thread series (UNF, UNRF, or UNJF) is commonly used for bolts and nuts in high-strength applications. This series has less thread depth and a larger minor diameter than the coarse-thread series. Consequently, thinner walls are permitted for internal threads and more strength is available to external threads than for coarse-thread series of the same nominal size. In order to prevent internal thread stripping, a longer length of engagement is required for fine-thread series than for coarse-thread series for thread materials of the same strength levels. However, for both fine- and coarse-thread series, length of engagement in tapped holes must be selected to meet strength requirements. This also allows for finer adjustment in cases such as a slotted nut and cotter pin assembly.

3.5 Extra-Fine-Thread Series Applications


The extra-fine-thread series (UNEF, UNREF, or UNJEF) is used particularly for equipment and threaded parts that require fine adjustment, such as bearing retaining nuts, adjusting screws, etc., and for thin-wall tubing and thin nuts.

Figure 9
External UNJ Thread Design Profile and Tolerances

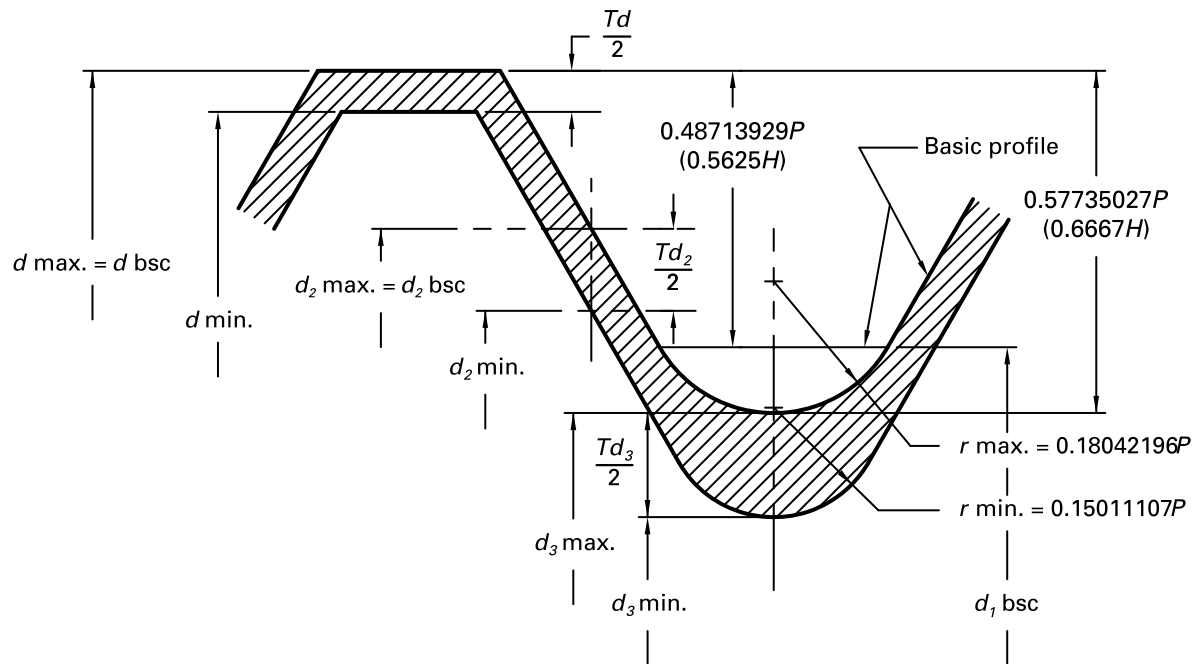


GENERAL NOTE: Rounded crest is optional (see [para. 7.1.2.2](#)).

Figure 10
Disposition of Diametral Tolerances, Allowance, and Crest Clearance for Unified Inch Screw Thread Series UNJ, Classes 2A and 2B

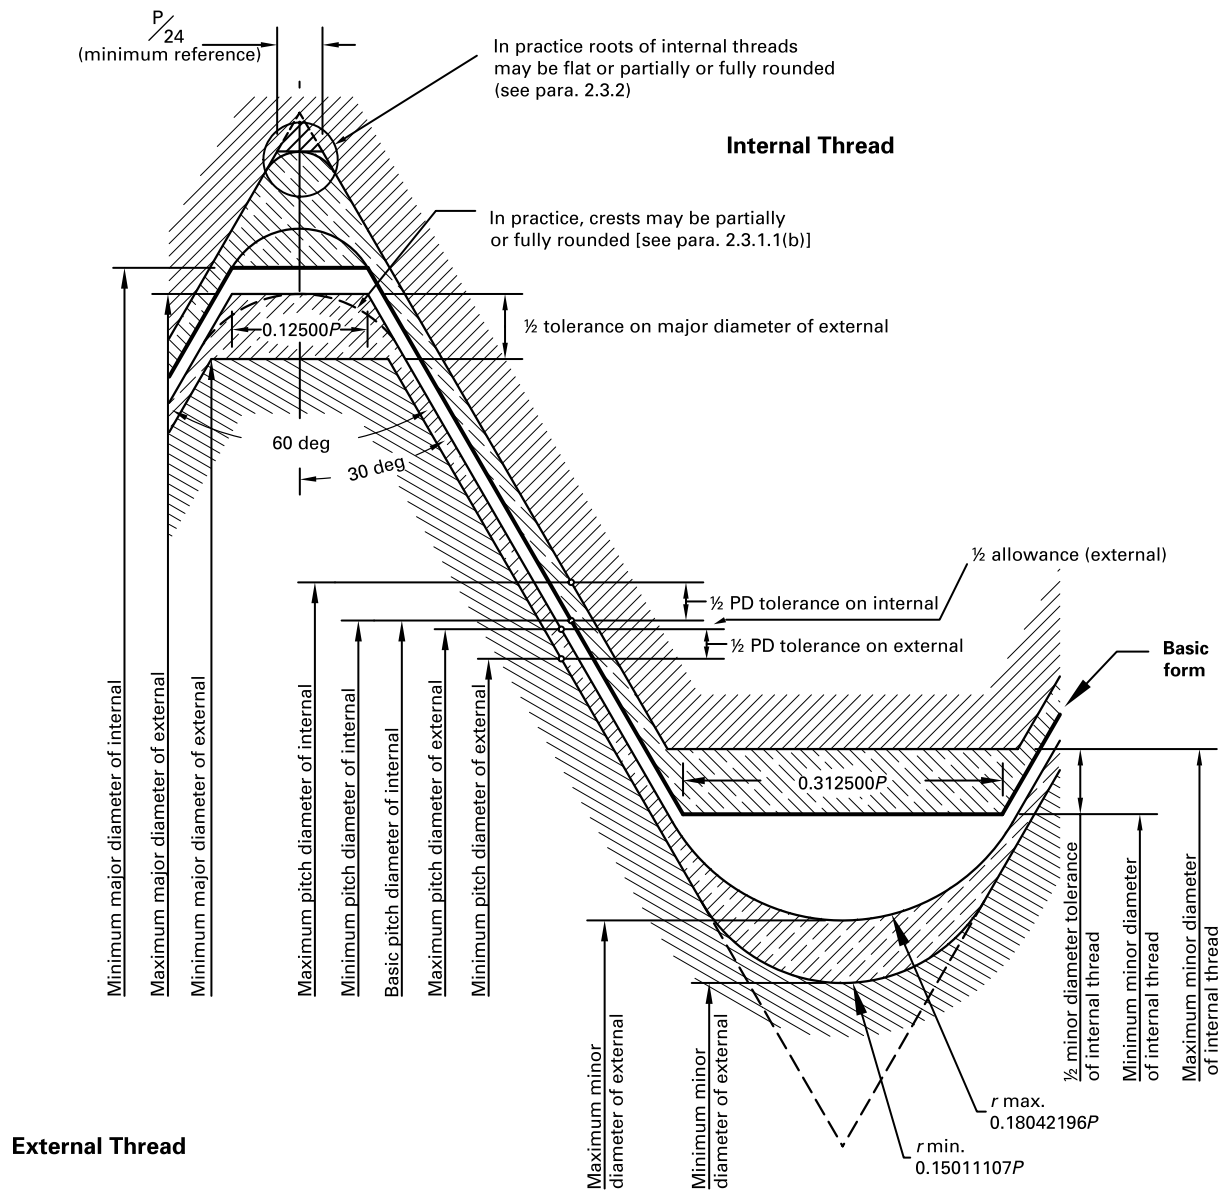

GENERAL NOTE: Lead and angle tolerances are defined in [section 9](#).

Figure 11
Disposition of Diametral Tolerances and Crest Clearance for Unified Inch Screw Thread Series UNJ,
Classes 3A and 3B

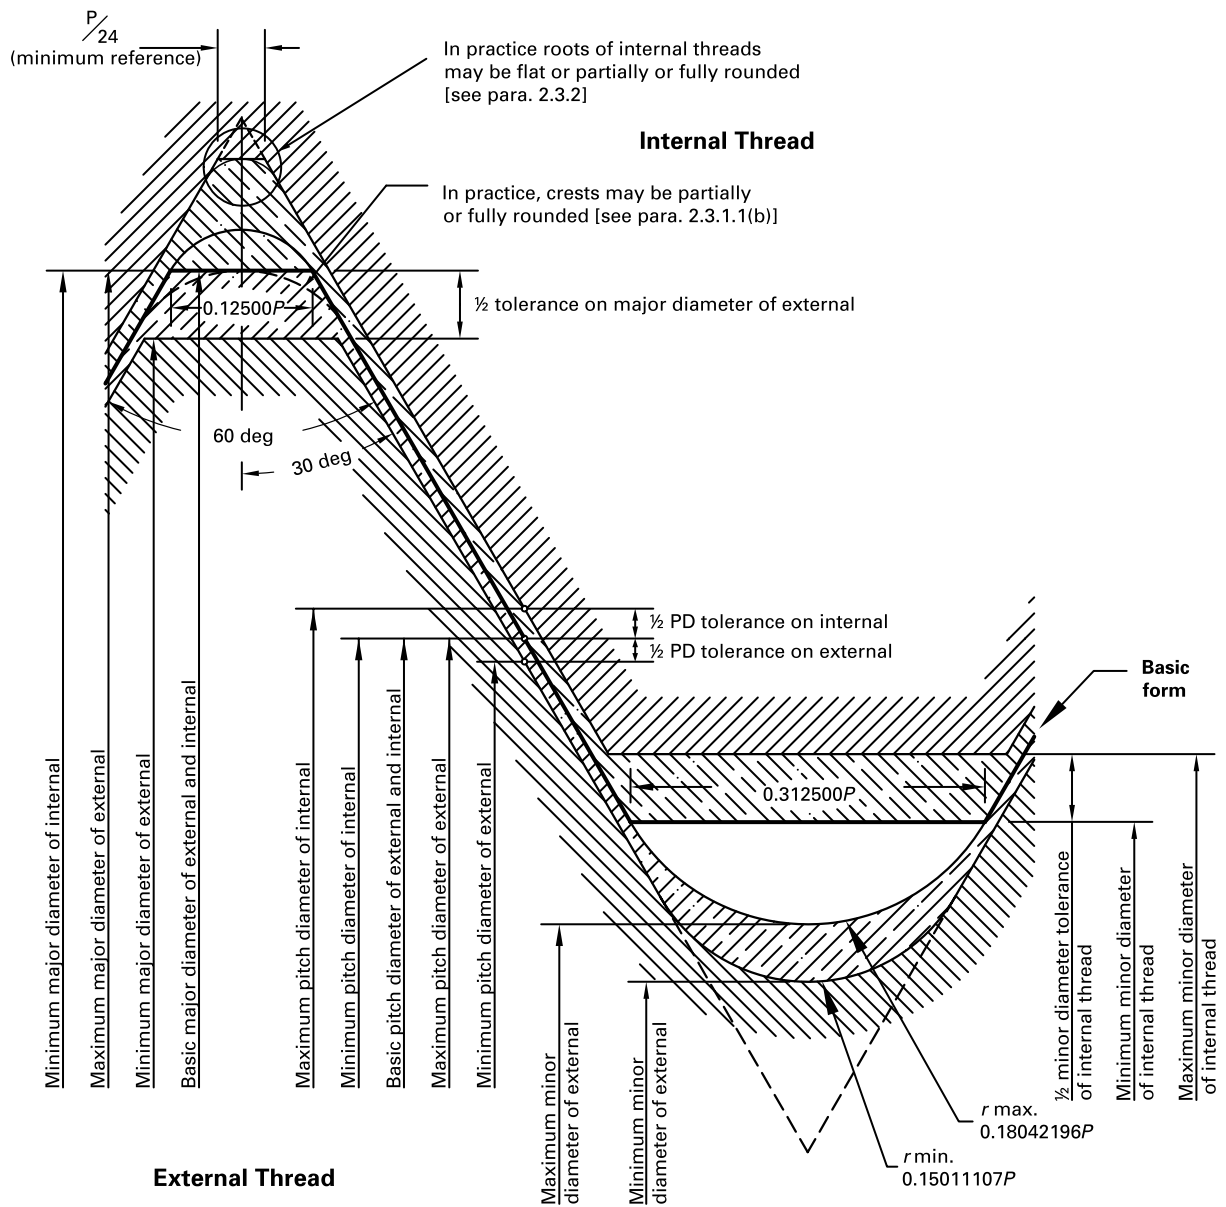

GENERAL NOTE: Lead and angle tolerances are defined in [section 9](#).

Figure 12
Internal UNJ Thread Design Profile and Tolerances


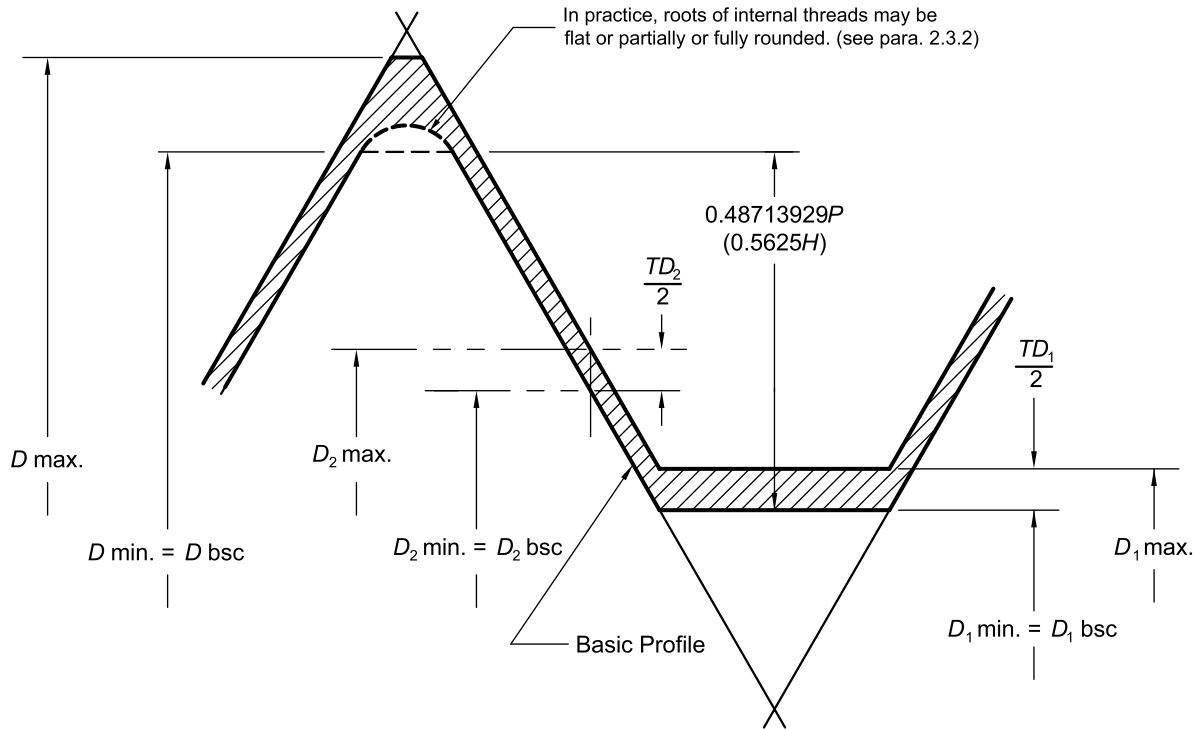


Figure 13
Basic Method of Designating Screw Threads

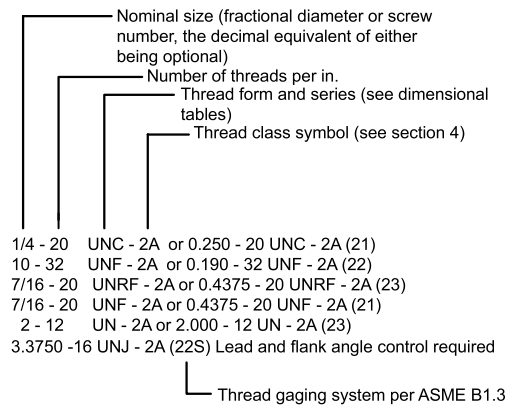

GENERAL NOTE: The thread acceptability gaging system requirement of ASME B1.3 may be added to the thread size designation as noted above or as specified in pertinent documentation, such as a drawing or procurement document.

3.6 Constant-Pitch-Thread Series Applications

The various constant-pitch series (UN, UNR, or UNJ) with 4, 6, 8, 12, 16, 20, 28, and 32 threads per inch (see [Table 1](#)) offer a comprehensive range of diameter-pitch combinations for those purposes where the threads in the coarse-, fine-, and extra-fine-thread series do not meet the particular requirements of the design. The primary sizes of the 8-UN, 12-UN, and 16-UN series shown in [Table 1](#) are the most commonly used.

Whenever a thread in a constant-pitch series also appears in the UNC, UNF, or UNEF series, the symbols and tolerances for limits of size of those standard series are applicable.

3.6.1 8-Thread Series. The 8-thread series (8-UN) is a uniform-pitch series used for large diameters or as a compromise between coarse- and fine-thread series. Although originally intended for high-pressure-joint bolts and nuts, it is now widely used as a substitute for the coarse-thread series for diameters larger than 1 in.

3.6.2 12-Thread Series. The 12-thread series (12-UN) is a uniform-pitch series for large diameters requiring threads of medium-fine pitch. Although originally intended for boiler practice, it is now used as a continuation of the fine-thread series for diameters larger than $1\frac{1}{2}$ in.

3.6.3 16-Thread Series. The 16-thread series (16-UN) is a uniform-pitch series for large diameters requiring fine-pitch threads. It is suitable for adjusting collars and retaining nuts and also serves as a continuation of the extra-fine-thread series for diameters larger than $1\frac{1}{16}$ in.

3.7 Fine Threads for Thin-Wall Tubing

The limits of size for a 28-thread series, ranging from 0.216 in. to 1.5 in. nominal size, are included in [Tables 2A](#) and [2B](#). These threads are recommended for general use on thin-wall tubing. The 27-thread series is no longer standard but is included in [Table D-1](#).

4 SCREW THREAD CLASSES

4.1 Thread Classes

Thread classes are distinguished from each other by the amounts of tolerance and allowance. Classes 1A, 2A, and 3A apply to external threads only, and Classes 1B, 2B, and 3B apply to internal threads only. Allowance is specified only for Classes 1A and 2A and the allowance is identical

for both classes. Tolerance decreases as class number increases (e.g., tolerance for Class 3A is less than that for Class 2A, which is less than that for Class 1A). End-use applications dictate the requirements for selection of thread classes, but it should be understood that all internal classes will assemble with all external classes. For example, a Class 2A external thread may be used with a Class 1B, Class 2B, or Class 3B internal thread.

4.1.1 Classes 1A and 1B Threads. Classes 1A (external) and 1B (internal) threads replaced American National Class 1 screw threads. These classes provide for applications where a liberal tolerance and an allowance are required to permit easy assembly even with slightly nicked threads. These classes are intended for ordnance and other special uses. Maximum diameters of Class 1A threads are less than basic by the amount of the allowance (the allowance is identical to that for Class 2A). The allowance is not available for plating or coating; consequently, it will be necessary to make special provisions in thread manufacturing for accommodation of plating or coating. The minimum diameters of Class 1B threads, whether or not plated or coated, are basic and therefore afford no allowance or clearance for assembly at maximum material limits.

4.1.2 Classes 2A and 2B Threads. Classes 2A (external) and 2B (internal) threads are the most commonly used thread classes for general applications, including production of bolts, screws, nuts, and similar threaded fasteners.

The maximum diameters of Class 2A uncoated threads are less than basic by the amount of the allowance. The allowance minimizes galling and seizing in high-cycle wrench assembly, or it can be used to accommodate plated finishes or other coatings. However, for threads with additive finish, the maximum diameters of Class 2A may be exceeded by the amount of the allowance, i.e., the 2A maximum diameters apply to an unplated part or to a part before plating, whereas the basic diameters apply to a part after plating. The minimum diameters of Class 2B threads, whether or not plated or coated, are basic, affording no allowance or clearance for assembly at maximum material limits.

4.1.3 Classes 3A and 3B Threads. Classes 3A (external) and 3B (internal) threads provide for applications where closeness of fit, accuracy of thread elements, or both are important. The maximum diameters of Class 3A threads and the minimum diameters of Class 3B threads, whether or not plated or coated, are basic, affording no allowance or clearance for assembly at maximum material limits.

Table 1
Standard Series Threads (UN, UNR, and UNJ)

Threads/in.															
Nominal Size, in.			Series With Graded Pitches			Series With Constant Pitches								Nominal Size, in.	
			Coarse UNC	Fine UNF	Extra Fine UNEF	4-UN	6-UN	8-UN	12-UN	16-UN	20-UN	28-UN	32-UN		
Primary	Secondary	Basic Major Diameter													
0	...	0.0600	...	80	...	...	...	...	...	...	...	...	...	0	
...	1	0.0730	64	72	...	...	...	...	...	...	...	...	...	1	
2	...	0.0860	56	64	...	...	...	...	...	...	...	...	...	2	
...	3	0.0990	48	56	...	...	...	...	...	...	...	...	...	3	
4	...	0.1120	40	48	...	...	...	...	...	...	...	...	...	4	
5	...	0.1250	40	44	...	...	...	...	...	...	...	...	...	5	
6	...	0.1380	32	40	...	...	...	...	...	...	...	...	UNC	6	
8	...	0.1640	32	36	...	...	...	...	...	...	...	...	UNC	8	
10	...	0.1900	24	32	...	...	...	...	...	...	...	...	UNF	10	
...	12	0.2160	24	28	32	...	...	...	...	...	...	UNF	UNEF	12	
1/4	...	0.2500	20	28	32	...	...	...	...	...	UNC	UNF	UNEF	1/4	
5/16	...	0.3125	18	24	32	...	...	...	...	...	20	28	UNEF	5/16	
3/8	...	0.3750	16	24	32	...	...	...	...	...	UNC	20	28	UNEF	3/8
7/16	...	0.4375	14	20	28	...	...	...	...	...	16	UNF	UNEF	32	7/16
1/2	...	0.5000	13	20	28	...	...	...	...	...	16	UNF	UNEF	32	1/2
9/16	...	0.5625	12	18	24	...	...	...	UNC	16	20	28	32	9/16	
5/8	...	0.6250	11	18	24	...	...	...	12	16	20	28	32	5/8	
...	11/16	0.6875	...	...	24	...	...	...	12	16	20	28	32	11/16	
3/4	...	0.7500	10	16	20	...	...	...	12	UNF	UNEF	28	32	3/4	
...	13/16	0.8125	...	...	20	...	...	...	12	16	UNEF	28	32	13/16	
7/8	...	0.8750	9	14	20	...	...	...	12	16	UNEF	28	32	7/8	
...	15/16	0.9375	...	...	20	...	...	...	12	16	UNEF	28	32	15/16	
1	...	1.0000	8	12	20	...	...	UNC	UNF	16	UNEF	28	32	1	
...	1 1/16	1.0625	...	...	18	...	...	8	12	16	20	28	...	1 1/16	
1 1/8	...	1.1250	7	12	18	...	...	8	UNF	16	20	28	...	1 1/8	
...	1 3/16	1.1875	...	...	18	...	...	8	12	16	20	28	...	1 3/16	
1 1/4	...	1.2500	7	12	18	...	...	8	UNF	16	20	28	...	1 1/4	
...	1 5/16	1.3125	...	...	18	...	...	8	12	16	20	28	...	1 5/16	
1 3/8	...	1.3750	6	12	18	...	UNC	8	UNF	16	20	28	...	1 3/8	
...	1 7/16	1.4375	...	...	18	...	6	8	12	16	20	28	...	1 7/16	
1 1/2	...	1.5000	6	12	18	...	UNC	8	UNF	16	20	28	...	1 1/2	
...	1 9/16	1.5625	...	...	18	...	6	8	12	16	20	...	...	1 9/16	
1 5/8	...	1.6250	...	...	18	...	6	8	12	16	20	...	...	1 5/8	
...	1 11/16	1.6875	...	...	18	...	6	8	12	16	20	...	...	1 11/16	
1 3/4	...	1.7500	5	...	...	...	6	8	12	16	20	...	...	1 3/4	
...	1 13/16	1.8125	...	...	...	...	6	8	12	16	20	...	...	1 13/16	
1 7/8	...	1.8750	...	...	...	...	6	8	12	16	20	...	...	1 7/8	
...	1 15/16	1.9375	...	...	...	...	6	8	12	16	20	...	...	1 15/16	
2	...	2.0000	4 1/2	...	...	...	6	8	12	16	20	...	...	2	
...	2 1/8	2.1250	...	...	...	...	6	8	12	16	20	...	...	2 1/8	
2 1/4	...	2.2500	4 1/2	...	...	...	6	8	12	16	20	...	...	2 1/4	
...	2 3/8	2.3750	...	...	...	...	6	8	12	16	20	...	...	2 3/8	
2 1/2	...	2.5000	4	...	...	UNC	6	8	12	16	20	...	...	2 1/2	
...	2 5/8	2.6250	...	...	...	4	6	8	12	16	20	...	...	2 5/8	

Table 1
Standard Series Threads (UN, UNR, and UNJ) (Cont'd)

Nominal Size, in.			Threads/in.											Nominal Size, in.
			Series With Graded Pitches			Series With Constant Pitches								
Primary	Secondary	Basic Major Diameter	Coarse UNC	Fine UNF	Extra Fine UNEF	4-UN	6-UN	8-UN	12-UN	16-UN	20-UN	28-UN	32-UN	
2¾	...	2.7500	4	...	...	UNC	6	8	12	16	20	...	...	2¾
...	2⅞	2.8750	...	...	...	4	6	8	12	16	20	...	...	2⅞
3	...	3.0000	4	...	...	UNC	6	8	12	16	20	...	...	3
...	3⅛	3.1250	...	...	...	4	6	8	12	16	...	...	...	3⅛
3¼	...	3.2500	4	...	...	UNC	6	8	12	16	...	...	...	3¼
...	3⅜	3.3750	...	...	...	4	6	8	12	16	...	...	...	3⅜
3½	...	3.5000	4	...	...	UNC	6	8	12	16	...	...	...	3½
...	3⅝	3.6250	...	...	...	4	6	8	12	16	...	...	...	3⅝
3¾	...	3.7500	4	...	...	UNC	6	8	12	16	...	...	...	3¾
...	3⅞	3.8750	...	...	...	4	6	8	12	16	...	...	...	3⅞
4	...	4.0000	4	...	...	UNC	6	8	12	16	...	...	...	4
...	4⅛	4.1250	...	...	...	4	6	8	12	16	...	...	...	4⅛
4¼	...	4.2500	...	...	...	4	6	8	12	16	...	...	...	4¼
...	4⅜	4.3750	...	...	...	4	6	8	12	16	...	...	...	4⅜
4½	...	4.5000	...	...	...	4	6	8	12	16	...	...	...	4½
...	4⅝	4.6250	...	...	...	4	6	8	12	16	...	...	...	4⅝
4¾	...	4.7500	...	...	...	4	6	8	12	16	...	...	...	4¾
...	4⅞	4.8750	...	...	...	4	6	8	12	16	...	...	...	4⅞
5	...	5.0000	...	...	...	4	6	8	12	16	...	...	...	5
...	5⅛	5.1250	...	...	...	4	6	8	12	16	...	...	...	5⅛
5¼	...	5.2500	...	...	...	4	6	8	12	16	...	...	...	5¼
...	5⅜	5.3750	...	...	...	4	6	8	12	16	...	...	...	5⅜
5½	...	5.5000	...	...	...	4	6	8	12	16	...	...	...	5½
...	5⅝	5.6250	...	...	...	4	6	8	12	16	...	...	...	5⅝
5¾	...	5.7500	...	...	...	4	6	8	12	16	...	...	...	5¾
...	5⅞	5.8750	...	...	...	4	6	8	12	16	...	...	...	5⅞
6	...	6.0000	...	...	...	4	6	8	12	16	...	...	...	6

GENERAL NOTE: Series designation shown indicates the UN thread form; however, the UNJ thread form may be specified by substituting the applicable symbol in place of UN in all designations for both internal and external use and the UNR thread form may be specified by substituting the applicable symbol in place of UN in all designations for external use only.

Table 2A
Limits of Size for Standard Series External Threads (UN, UNR, and UNJ)

Nominal Size and Threads/in.	Series Designa- tion	Class [Note (1)]	Allowance, <i>es</i>	Major Diameter, <i>d</i>			Pitch Diameter, <i>d</i> ₂ , and Functional Diameter [Note (4)]		Tolerance, <i>Td</i> ₂ [Note (5)]	Minor Diameter, <i>d</i> ₁ /Root Radius									
										UN		UNR				UNJ			
										Reference Diameter [Notes (6), (7)]		Reference Diameter [Note (6)]		Radius		Diameter		Radius	
										Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
0 – 80 or 0.0600 – 80	UNF	2A	0.0005	0.0595	0.0563	...	0.0514	0.0496	0.001762	0.0460	0.0415	0.0442	...	0.0018	0.0014	0.0451	0.0425	0.0023	0.0019
		3A	0.0000	0.0600	0.0568	...	0.0519	0.0506	0.0013	0.0465	0.0425	0.0447	...	0.0018	0.0014	0.0456	0.0435	0.0023	0.0019
(8) 1 – 64 or 0.0730 – 64	UNC	2A	0.0006	0.0724	0.0686	...	0.0623	0.0603	0.001970	0.0555	0.0502	0.0532	...	0.0023	0.0017	0.0544	0.0515	0.0028	0.0023
		3A	0.0000	0.0730	0.0692	...	0.0629	0.0614	0.0015	0.0561	0.0513	0.0538	...	0.0023	0.0017	0.0550	0.0526	0.0028	0.0023
(8) 1 – 72 or 0.0730 – 72	UNF	2A	0.0006	0.0724	0.0689	...	0.0634	0.0615	0.001899	0.0574	0.0525	0.0554	...	0.0020	0.0015	0.0564	0.0536	0.0025	0.0021
		3A	0.0000	0.0730	0.0695	...	0.0640	0.0626	0.0014	0.0580	0.0536	0.0560	...	0.0020	0.0015	0.0570	0.0547	0.0025	0.0021
2 – 56 or 0.0860 – 56	UNC	2A	0.0006	0.0854	0.0813	...	0.0738	0.0717	0.002127	0.0661	0.0601	0.0635	...	0.0026	0.0019	0.0648	0.0616	0.0032	0.0027
		3A	0.0000	0.0860	0.0819	...	0.0744	0.0728	0.0016	0.0667	0.0612	0.0641	...	0.0026	0.0019	0.0654	0.0627	0.0032	0.0027
(8) 2 – 64 or 0.0860 – 64	UNF	2A	0.0006	0.0854	0.0816	...	0.0753	0.0733	0.002040	0.0685	0.0632	0.0662	...	0.0023	0.0017	0.0674	0.0645	0.0028	0.0023
		3A	0.0000	0.0860	0.0822	...	0.0759	0.0744	0.0015	0.0691	0.0643	0.0668	...	0.0023	0.0017	0.0680	0.0656	0.0028	0.0023
3 – 48 or 0.0990 – 48	UNC	2A	0.0007	0.0983	0.0938	...	0.0848	0.0825	0.002302	0.0757	0.0690	0.0727	...	0.0030	0.0023	0.0743	0.0707	0.0038	0.0031
		3A	0.0000	0.0990	0.0945	...	0.0855	0.0838	0.0017	0.0764	0.0703	0.0734	...	0.0030	0.0023	0.0750	0.0720	0.0038	0.0031
3 – 56 or 0.0990 – 56	UNF	2A	0.0007	0.0983	0.0942	...	0.0867	0.0845	0.002191	0.0790	0.0729	0.0764	...	0.0026	0.0019	0.0777	0.0744	0.0032	0.0027
		3A	0.0000	0.0990	0.0949	...	0.0874	0.0858	0.0016	0.0797	0.0742	0.0771	...	0.0026	0.0019	0.0784	0.0757	0.0032	0.0027
4 – 40 or 0.1120 – 40	UNC	2A	0.0008	0.1112	0.1061	...	0.095	0.0925	0.002507	0.0841	0.0763	0.0805	...	0.0036	0.0027	0.0824	0.0784	0.0045	0.0038
		3A	0.0000	0.1120	0.1069	...	0.0958	0.0939	0.0019	0.0849	0.0777	0.0813	...	0.0036	0.0027	0.0832	0.0798	0.0045	0.0038
4 – 48 or 0.1120 – 48	UNF	2A	0.0007	0.1113	0.1068	...	0.0978	0.0954	0.002361	0.0887	0.0819	0.0857	...	0.0030	0.0023	0.0873	0.0836	0.0038	0.0031
		3A	0.0000	0.1120	0.1075	...	0.0985	0.0967	0.0018	0.0894	0.0832	0.0864	...	0.0030	0.0023	0.0880	0.0849	0.0038	0.0031
5 – 40 or 0.1250 – 40	UNC	2A	0.0008	0.1242	0.1191	...	0.1080	0.1054	0.002562	0.0971	0.0892	0.0935	...	0.0036	0.0027	0.0954	0.0913	0.0045	0.0038
		3A	0.0000	0.1250	0.1199	...	0.1088	0.1069	0.0019	0.0979	0.0907	0.0943	...	0.0036	0.0027	0.0962	0.0928	0.0045	0.0038
5 – 44 or 0.1250 – 44	UNF	2A	0.0007	0.1243	0.1195	...	0.1095	0.1070	0.002484	0.0997	0.0922	0.0964	...	0.0033	0.0025	0.0980	0.0941	0.0041	0.0034
		3A	0.0000	0.1250	0.1202	...	0.1102	0.1083	0.0019	0.1004	0.0935	0.0971	...	0.0033	0.0025	0.0987	0.0954	0.0041	0.0034
(8) 6 – 32 or 0.1380 – 32	UNC	2A	0.0008	0.1372	0.1312	...	0.1169	0.1141	0.002820	0.1034	0.0938	0.0989	...	0.0045	0.0034	0.1011	0.0964	0.0056	0.0047
		3A	0.0000	0.1380	0.1320	...	0.1177	0.1156	0.0021	0.1042	0.0953	0.0997	...	0.0045	0.0034	0.1019	0.0979	0.0056	0.0047
6 – 40 or 0.1380 – 40	UNF	2A	0.0008	0.1372	0.1321	...	0.1210	0.1184	0.002614	0.1101	0.1022	0.1065	...	0.0036	0.0027	0.1084	0.1043	0.0045	0.0038
		3A	0.0000	0.1380	0.1329	...	0.1218	0.1198	0.0020	0.1109	0.1036	0.1073	...	0.0036	0.0027	0.1092	0.1057	0.0045	0.0038

Table 2A
Limits of Size for Standard Series External Threads (UN, UNR, and UNJ) (Cont'd)

							Major Diameter, <i>d</i>		Pitch Diameter, <i>d</i> ₂ , and Functional Diameter [Note (4)]		Minor Diameter, <i>d</i> ₁ /Root Radius									
											UN		UNR				UNJ			
											Reference Diameter [Notes (6), (7)]		Reference Diameter [Note (6)]		Radius		Diameter		Radius	
Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Allowance, <i>es</i>	Max. [Note (2)]	Min.	Min. [Note (3)]	Max. [Note (2)]	Min.	Tolerance, <i>Td</i> ₂ [Note (5)]	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
(8) 8 – 32 or 0.1640 – 32	UNC	2A	0.0009	0.1631	0.1571	...	0.1428	0.1399	0.002916	0.1293	0.1196	0.1248	...	0.0045	0.0034	0.1270	0.1222	0.0056	0.0047	
	32	3A	0.0000	0.1640	0.1580	...	0.1437	0.1415	0.0022	0.1302	0.1212	0.1257	...	0.0045	0.0034	0.1279	0.1238	0.0056	0.0047	
8 – 36 or 0.1640 – 36	UNF	2A	0.0008	0.1632	0.1577	...	0.1452	0.1424	0.002804	0.1331	0.1244	0.1291	...	0.0040	0.0030	0.1312	0.1267	0.0050	0.0042	
	36	3A	0.0000	0.1640	0.1585	...	0.1460	0.1439	0.0021	0.1339	0.1259	0.1299	...	0.0040	0.0030	0.1320	0.1282	0.0050	0.0042	
(8) 10 – 24 or 0.1900 – 24	UNC	2A	0.0010	0.1890	0.1818	...	0.1619	0.1586	0.003319	0.1439	0.1315	0.1379	...	0.0060	0.0045	0.1409	0.1350	0.0075	0.0063	
	24	3A	0.0000	0.190	0.1828	...	0.1629	0.1604	0.0025	0.1449	0.1333	0.1389	...	0.0060	0.0045	0.1419	0.1368	0.0075	0.0063	
10 – 32 or 0.1900 – 32	UNF	2A	0.0009	0.1891	0.1831	...	0.1688	0.1658	0.003004	0.1553	0.1455	0.1508	...	0.0045	0.0034	0.1530	0.1481	0.0056	0.0047	
	32	3A	0.0000	0.1900	0.1840	...	0.1697	0.1674	0.0023	0.1562	0.1471	0.1517	...	0.0045	0.0034	0.1539	0.1497	0.0056	0.0047	
12 – 24 or 0.2160 – 24	UNC	2A	0.0010	0.2150	0.2078	...	0.1879	0.1845	0.003400	0.1699	0.1574	0.1639	...	0.0060	0.0045	0.1669	0.1609	0.0075	0.0063	
	24	3A	0.0000	0.2160	0.2088	...	0.1889	0.1863	0.0026	0.1709	0.1592	0.1649	...	0.0060	0.0045	0.1679	0.1627	0.0075	0.0063	
12 – 28 or 0.2160 – 28	UNF	2A	0.0010	0.2150	0.2085	...	0.1918	0.1886	0.003224	0.1763	0.1654	0.1712	...	0.0052	0.0039	0.1738	0.1684	0.0064	0.0054	
	28	3A	0.0000	0.2160	0.2095	...	0.1928	0.1904	0.0024	0.1773	0.1672	0.1722	...	0.0052	0.0039	0.1748	0.1702	0.0064	0.0054	
(8) 12 – 32 or 0.2160 – 32	UNEF	2A	0.0010	0.2150	0.2090	...	0.1947	0.1915	0.003183	0.1812	0.1712	0.1767	...	0.0045	0.0034	0.1789	0.1738	0.0056	0.0047	
	32	3A	0.0000	0.2160	0.2100	...	0.1957	0.1933	0.0024	0.1822	0.1730	0.1777	...	0.0045	0.0034	0.1799	0.1756	0.0056	0.0047	
¼ – 20 or 0.2500 – 20	UNC	1A	0.0011	0.2489	0.2367	...	0.2164	0.2108	0.0056	0.1948	0.1783	0.1876	...	0.0072	0.0054	...	...	...	...	
	20	2A	0.0011	0.2489	0.2408	0.2367	0.2164	0.2127	0.003731	0.1948	0.1802	0.1876	...	0.0072	0.0054	0.1911	0.1844	0.0090	0.0075	
	20	3A	0.0000	0.2500	0.2419	...	0.2175	0.2147	0.0028	0.1959	0.1822	0.1887	...	0.0072	0.0054	0.1922	0.1864	0.009	0.0075	
¼ – 28 or 0.2500 – 28	UNF	1A	0.0010	0.2490	0.2392	...	0.2258	0.2208	0.0050	0.2103	0.1976	0.2052	...	0.0052	0.0039	...	...	...	...	
	28	2A	0.0010	0.2490	0.2425	...	0.2258	0.2225	0.003322	0.2103	0.1993	0.2052	...	0.0052	0.0039	0.2078	0.2023	0.0064	0.0054	
	28	3A	0.0000	0.2500	0.2435	...	0.2268	0.2243	0.0025	0.2113	0.2011	0.2062	...	0.0052	0.0039	0.2088	0.2041	0.0064	0.0054	
¼ – 32 or 0.2500 – 32	UNEF	2A	0.0010	0.2490	0.2430	...	0.2287	0.2255	0.003228	0.2152	0.2052	0.2107	...	0.0045	0.0034	0.2129	0.2078	0.0056	0.0047	
	32	3A	0.0000	0.2500	0.2440	...	0.2297	0.2273	0.0024	0.2162	0.2070	0.2117	...	0.0045	0.0034	0.2139	0.2096	0.0056	0.0047	
5/16 – 18 or 0.3125 – 18	UNC	1A	0.0012	0.3113	0.2982	...	0.2752	0.2691	0.0061	0.2512	0.2330	0.2431	...	0.0080	0.0060	...	...	...	...	
	18	2A	0.0012	0.3113	0.3026	0.2982	0.2752	0.2712	0.004041	0.2512	0.2351	0.2431	...	0.0080	0.0060	0.2471	0.2398	0.0100	0.0083	
	18	3A	0.0000	0.3125	0.3038	...	0.2764	0.2734	0.0030	0.2524	0.2373	0.2443	...	0.0080	0.0060	0.2483	0.2420	0.0100	0.0083	
(8) 5/16 – 20 or 0.3125 – 20	UN	2A	0.0012	0.3113	0.3032	...	0.2788	0.2747	0.004060	0.2572	0.2422	0.2500	...	0.0072	0.0054	0.2535	0.2464	0.0090	0.0075	
(8) 20		3A	0.0000	0.3125	0.3044	...	0.2800	0.2770	0.0030	0.2584	0.2445	0.2512	...	0.0072	0.0054	0.2547	0.2487	0.0090	0.0075	

Table 2A
Limits of Size for Standard Series External Threads (UN, UNR, and UNJ) (Cont'd)

							Minor Diameter, d_1 /Root Radius												
							Pitch Diameter, d_2 , and Functional Diameter [Note (4)]		UN		UNR				UNJ				
									Reference Diameter [Notes (6), (7)]	Reference Diameter [Note (6)]	Radius	Diameter	Radius						
Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Allowance, es	Max. [Note (2)]	Min.	Min. [Note (3)]	Max. [Note (2)]	Tolerance, Td_2 [Note (5)]	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
$\frac{5}{16}$ – 24 or 0.3125 – 24	UNF	1A	0.0011	0.3114	0.3006	...	0.2843	0.2788	0.0055	0.2663	0.2517	0.2603	...	0.0060	0.0045	...	...	...	...
	24	2A	0.0011	0.3114	0.3042	...	0.2843	0.2806	0.003660	0.2663	0.2535	0.2603	...	0.0060	0.0045	0.2633	0.2570	0.0075	0.0063
	24	3A	0.0000	0.3125	0.3053	...	0.2854	0.2827	0.0027	0.2674	0.2556	0.2614	...	0.0060	0.0045	0.2644	0.2591	0.0075	0.0063
(8) $\frac{5}{16}$ – 28 or 0.3125 – 28	UN	2A	0.00100	0.3115	0.3050	...	0.2883	0.2848	0.003495	0.2728	0.2616	0.2677	...	0.0052	0.0039	0.2703	0.2646	0.0064	0.0054
	28	3A	0.0000	0.3125	0.3060	...	0.2893	0.2867	0.0026	0.2738	0.2635	0.2687	...	0.0052	0.0039	0.2713	0.2665	0.0064	0.0054
(8) $\frac{5}{16}$ – 32 or 0.3125 – 32	UNEF	2A	0.0010	0.3115	0.3055	...	0.2912	0.2879	0.003301	0.2777	0.2676	0.2732	...	0.0045	0.0034	0.2754	0.2702	0.0056	0.0047
	32	3A	0.0000	0.3125	0.3065	...	0.2922	0.2897	0.0025	0.2787	0.2694	0.2742	...	0.0045	0.0034	0.2764	0.2720	0.0056	0.0047
$\frac{3}{8}$ – 16 or 0.3750 – 16	UNC	1A	0.0013	0.3737	0.3595	...	0.3331	0.3266	0.0065	0.3060	0.2860	0.2970	...	0.0090	0.0068	...	...	...	...
	16	2A	0.0013	0.3737	0.3643	0.3595	0.3331	0.3287	0.004363	0.3060	0.2881	0.2970	...	0.0090	0.0068	0.3015	0.2933	0.0113	0.0094
	16	3A	0.0000	0.3750	0.3656	...	0.3344	0.3311	0.0033	0.3073	0.2905	0.2983	...	0.009	0.0068	0.3028	0.2957	0.0113	0.0094
$\frac{3}{8}$ – 20 or 0.3750 – 20	UN	2A	0.0012	0.3738	0.3657	...	0.3413	0.3372	0.004124	0.3197	0.3047	0.3125	...	0.0072	0.0054	0.3160	0.3089	0.0090	0.0075
	20	3A	0.0000	0.3750	0.3669	...	0.3425	0.3394	0.0031	0.3209	0.3069	0.3137	...	0.0072	0.0054	0.3172	0.3111	0.0090	0.0075
$\frac{3}{8}$ – 24 or 0.3750 – 24	UNF	1A	0.0011	0.3739	0.3631	...	0.3468	0.3411	0.0057	0.3288	0.3140	0.3228	...	0.0060	0.0045	...	...	...	...
	24	2A	0.0011	0.3739	0.3667	...	0.3468	0.3430	0.003804	0.3288	0.3159	0.3228	...	0.0060	0.0045	0.3258	0.3194	0.0075	0.0063
	24	3A	0.0000	0.3750	0.3678	...	0.3479	0.3450	0.0029	0.3299	0.3179	0.3239	...	0.0060	0.0045	0.3269	0.3214	0.0075	0.0063
$\frac{3}{8}$ – 28 or 0.3750 – 28	UN	2A	0.0011	0.3739	0.3674	...	0.3507	0.3471	0.003559	0.3352	0.3239	0.3301	...	0.0052	0.0039	0.3327	0.3269	0.0064	0.0054
	28	3A	0.0000	0.3750	0.3685	...	0.3518	0.3491	0.0027	0.3363	0.3259	0.3312	...	0.0052	0.0039	0.3338	0.3289	0.0064	0.0054
$\frac{3}{8}$ – 32 or 0.3750 – 32	UNEF	2A	0.0010	0.3740	0.3680	...	0.3537	0.3503	0.003365	0.3402	0.3300	0.3357	...	0.0045	0.0034	0.3379	0.3326	0.0056	0.0047
	32	3A	0.0000	0.3750	0.3690	...	0.3547	0.3522	0.0025	0.3412	0.3319	0.3367	...	0.0045	0.0034	0.3389	0.3345	0.0056	0.0047
$\frac{7}{16}$ – 14 or 0.4375 – 14	UNC	1A	0.0014	0.4361	0.4206	...	0.3897	0.3826	0.0071	0.3588	0.3362	0.3485	...	0.0103	0.0077	...	...	...	...
	14	2A	0.0014	0.4361	0.4258	0.4206	0.3897	0.3850	0.004713	0.3588	0.3386	0.3485	...	0.0103	0.0077	0.3536	0.3446	0.0129	0.0107
	14	3A	0.0000	0.4375	0.4272	...	0.3911	0.3876	0.0035	0.3602	0.3412	0.3499	...	0.0103	0.0077	0.3550	0.3472	0.0129	0.0107
(8) $\frac{7}{16}$ – 16 or 0.4375 – 16	UN	2A	0.0014	0.4361	0.4267	...	0.3955	0.3909	0.004626	0.3684	0.3503	0.3594	...	0.0090	0.0068	0.3639	0.3555	0.0113	0.0094
	16	3A	0.0000	0.4375	0.4281	...	0.3969	0.3934	0.0035	0.3698	0.3528	0.3608	...	0.0090	0.0068	0.3653	0.3580	0.0113	0.0094
(8) $\frac{7}{16}$ – 20 or 0.4375 – 20	UNF	1A	0.0013	0.4362	0.4240	...	0.4037	0.3974	0.0063	0.3821	0.3649	0.3749	...	0.0072	0.0054	...	...	...	...
	20	2A	0.0013	0.4362	0.4281	...	0.4037	0.3995	0.004167	0.3821	0.3670	0.3749	...	0.0072	0.0054	0.3784	0.3712	0.0090	0.0075
	20	3A	0.0000	0.4375	0.4294	...	0.4050	0.4019	0.0031	0.3834	0.3694	0.3762	...	0.0072	0.0054	0.3797	0.3736	0.0090	0.0075
(8) $\frac{7}{16}$ – 28 or 0.4375 – 28	UNEF	2A	0.0011	0.4364	0.4299	...	0.4132	0.4096	0.003616	0.3977	0.3864	0.3926	...	0.0052	0.0039	0.3952	0.3894	0.0064	0.0054
	28	3A	0.0000	0.4375	0.4310	...	0.4143	0.4116	0.0027	0.3988	0.3884	0.3937	...	0.0052	0.0039	0.3963	0.3914	0.0064	0.0054

Table 2A
Limits of Size for Standard Series External Threads (UN, UNR, and UNJ) (Cont'd)

Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Allowance, <i>es</i>	Major Diameter, <i>d</i>			Pitch Diameter, <i>d</i> ₂ , and Functional Diameter [Note (4)]		Tolerance, <i>Td</i> ₂ [Note (5)]	Minor Diameter, <i>d</i> ₁ /Root Radius									
										UN		UNR				UNJ			
										Reference Diameter [Notes (6), (7)]		Reference Diameter [Note (6)]		Radius		Diameter		Radius	
										Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
(8) 7/16 – 32 or 0.4375 – 32	UN	2A	0.0010	0.4365	0.4305	...	0.4162	0.4128	0.003422	0.4027	0.3925	0.3982	...	0.0045	0.0034	0.4004	0.3951	0.0056	0.0047
32		3A	0.0000	0.4375	0.4315	...	0.4172	0.4146	0.0026	0.4037	0.3943	0.3992	...	0.0045	0.0034	0.4014	0.3969	0.0056	0.0047
1/2 – 13 or 0.5000 – 13	UNC	1A	0.0015	0.4985	0.4822	...	0.4485	0.4411	0.0074	0.4152	0.3911	0.4041	...	0.0111	0.0083	...	...	...	...
13		2A	0.0015	0.4985	0.4876	0.4822	0.4485	0.4435	0.004965	0.4152	0.3935	0.4041	...	0.0111	0.0083	0.4096	0.4000	0.0139	0.0115
13		3A	0.0000	0.5000	0.4891	...	0.4500	0.4463	0.0037	0.4167	0.3963	0.4056	...	0.0111	0.0083	0.4111	0.4028	0.0139	0.0115
1/2 – 16 or 0.5000 – 16	UN	2A	0.0014	0.4986	0.4892	...	0.4580	0.4533	0.004678	0.4309	0.4127	0.4219	...	0.0090	0.0068	0.4264	0.4179	0.0113	0.0094
(8) 16		3A	0.0000	0.5000	0.4906	...	0.4594	0.4559	0.0035	0.4323	0.4153	0.4233	...	0.0090	0.0068	0.4278	0.4205	0.0113	0.0094
1/2 – 20 or 0.5000 – 20	UNF	1A	0.0013	0.4987	0.4865	...	0.4662	0.4598	0.0064	0.4446	0.4273	0.4374	...	0.0072	0.0054	...	...	...	...
20		2A	0.0013	0.4987	0.4906	...	0.4662	0.4619	0.004288	0.4446	0.4294	0.4374	...	0.0072	0.0054	0.4409	0.4336	0.0090	0.0075
20		3A	0.0000	0.5000	0.4919	...	0.4675	0.4643	0.0032	0.4459	0.4318	0.4387	...	0.0072	0.0054	0.4422	0.4360	0.0090	0.0075
1/2 – 28 or 0.5000 – 28	UNEF	2A	0.0011	0.4989	0.4924	...	0.4757	0.4720	0.003668	0.4602	0.4488	0.4551	...	0.0052	0.0039	0.4577	0.4518	0.0064	0.0054
28		3A	0.0000	0.5000	0.4935	...	0.4768	0.4740	0.0028	0.4613	0.4508	0.4562	...	0.0052	0.0039	0.4588	0.4538	0.0064	0.0054
1/2 – 32 or 0.5000 – 32	UN	2A	0.0010	0.4990	0.4930	...	0.4787	0.4752	0.003474	0.4652	0.4549	0.4607	...	0.0045	0.0034	0.4629	0.4575	0.0056	0.0047
32		3A	0.0000	0.5000	0.4940	...	0.4797	0.4771	0.0026	0.4662	0.4568	0.4617	...	0.0045	0.0034	0.4639	0.4594	0.0056	0.0047
9/16 – 12 or 0.5625 – 12	UNC	1A	0.0016	0.5609	0.5437	...	0.5068	0.4990	0.0078	0.4707	0.4449	0.4587	...	0.0120	0.0090	...	...	...	...
12		2A	0.0016	0.5609	0.5495	0.5437	0.5068	0.5016	0.005225	0.4707	0.4475	0.4587	...	0.0120	0.0090	0.4647	0.4545	0.0150	0.0125
12		3A	0.0000	0.5625	0.5511	...	0.5084	0.5045	0.0039	0.4723	0.4504	0.4603	...	0.0120	0.0090	0.4663	0.4574	0.0150	0.0125
9/16 – 16 or 0.5625 – 16	UN	2A	0.0014	0.5611	0.5517	...	0.5205	0.5158	0.004725	0.4934	0.4752	0.4844	...	0.0090	0.0068	0.4889	0.4804	0.0113	0.0094
(8) 16		3A	0.0000	0.5625	0.5531	...	0.5219	0.5184	0.0035	0.4948	0.4778	0.4858	...	0.0090	0.0068	0.4903	0.4830	0.0113	0.0094
9/16 – 18 or 0.5625 – 18	UNF	1A	0.0014	0.5611	0.5480	...	0.5250	0.5182	0.0068	0.5010	0.4821	0.4929	...	0.0080	0.0060	...	...	...	...
18		2A	0.0014	0.5611	0.5524	...	0.5250	0.5205	0.004547	0.501	0.4844	0.4929	...	0.0080	0.0060	0.4969	0.4891	0.0100	0.0083
18		3A	0.0000	0.5625	0.5538	...	0.5264	0.5230	0.0034	0.5024	0.4869	0.4943	...	0.0080	0.0060	0.4983	0.4916	0.0100	0.0083
(8) 9/16 – 20 or 0.5625 – 20	UN	2A	0.0013	0.5612	0.5531	...	0.5287	0.5244	0.004280	0.5071	0.4919	0.4999	...	0.0072	0.0054	0.5034	0.4961	0.0090	0.0075
(8) 20		3A	0.0000	0.5625	0.5544	...	0.5300	0.5268	0.0032	0.5084	0.4943	0.5012	...	0.0072	0.0054	0.5047	0.4985	0.0090	0.0075
(8) 9/16 – 24 or 0.5625 – 24	UNEF	2A	0.0012	0.5613	0.5541	...	0.5342	0.5302	0.003960	0.5162	0.5031	0.5102	...	0.0060	0.0045	0.5132	0.5066	0.0075	0.0063
(8) 24		3A	0.0000	0.5625	0.5553	...	0.5354	0.5324	0.0030	0.5174	0.5053	0.5114	...	0.0060	0.0045	0.5144	0.5088	0.0075	0.0063
9/16 – 28 or 0.5625 – 28	UN	2A	0.0011	0.5614	0.5549	...	0.5382	0.5345	0.003715	0.5227	0.5113	0.5176	...	0.0052	0.0039	0.5202	0.5143	0.0064	0.0054
28		3A	0.0000	0.5625	0.5560	...	0.5393	0.5365	0.0028	0.5238	0.5133	0.5187	...	0.0052	0.0039	0.5213	0.5163	0.0064	0.0054

Table 2A
Limits of Size for Standard Series External Threads (UN, UNR, and UNJ) (Cont'd)

									Pitch Diameter, d_2 , and Functional Diameter [Note (4)]		Minor Diameter, d_1 /Root Radius									
											UN		UNR				UNJ			
											Reference Diameter [Notes (6), (7)]		Reference Diameter [Note (6)]		Radius		Diameter		Radius	
Nominal Size and Threads/in.	Series Designa- tion	Class [Note (1)]	Allowance, es	Max. [Note (2)]	Min.	Min. [Note (3)]	Max. [Note (2)]	Min.	Tolerance, Td_2 [Note (5)]	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
(8) $\frac{9}{16}$ – 32 or 0.5625 – 32	UN	2A	0.0011	0.5614	0.5554	...	0.5411	0.5376	0.003521	0.5276	0.5173	0.5231	...	0.0045	0.0034	0.5253	0.5199	0.0056	0.0047	
32		3A	0.0000	0.5625	0.5565	...	0.5422	0.5396	0.0026	0.5287	0.5193	0.5242	...	0.0045	0.0034	0.5264	0.5219	0.0056	0.0047	
(8) $\frac{5}{8}$ – 11 or 0.625 – 11	UNC	1A	0.0017	0.6233	0.6051	...	0.5643	0.5560	0.0083	0.5249	0.4970	0.5118	...	0.0131	0.0098	...	...	...	...	
(8) 11		2A	0.0017	0.6233	0.6112	0.6052	0.5643	0.5588	0.005501	0.5249	0.4998	0.5118	...	0.0131	0.0098	0.5184	0.5074	0.0164	0.0136	
11		3A	0.0000	0.6250	0.6129	...	0.5660	0.5619	0.0041	0.5266	0.5029	0.5135	...	0.0131	0.0098	0.5201	0.5105	0.0164	0.0136	
$\frac{5}{8}$ – 12 or 0.625 – 12	UN	2A	0.0016	0.6234	0.6120	...	0.5693	0.5639	0.005443	0.5332	0.5098	0.5212	...	0.0120	0.0090	0.5272	0.5168	0.0150	0.0125	
12		3A	0.0000	0.6250	0.6136	...	0.5709	0.5668	0.0041	0.5348	0.5127	0.5228	...	0.0120	0.0090	0.5288	0.5197	0.0150	0.0125	
$\frac{5}{8}$ – 16 or 0.6250 – 16	UN	2A	0.0014	0.6236	0.6142	...	0.5830	0.5782	0.004769	0.5559	0.5376	0.5469	...	0.0090	0.0068	0.5514	0.5428	0.0113	0.0094	
16		3A	0.0000	0.6250	0.6156	...	0.5844	0.5808	0.0036	0.5573	0.5402	0.5483	...	0.0090	0.0068	0.5528	0.5454	0.0113	0.0094	
$\frac{5}{8}$ – 18 or 0.6250 – 18	UNF	1A	0.0014	0.6236	0.6105	...	0.5875	0.5805	0.0070	0.5635	0.5444	0.5554	...	0.0080	0.0060	...	...	...	...	
18		2A	0.0014	0.6236	0.6149	...	0.5875	0.5828	0.004652	0.5635	0.5467	0.5554	...	0.0080	0.0060	0.5594	0.5514	0.0100	0.0083	
18		3A	0.0000	0.6250	0.6163	...	0.5889	0.5854	0.0035	0.5649	0.5493	0.5568	...	0.0080	0.0060	0.5608	0.5540	0.0100	0.0083	
$\frac{5}{8}$ – 20 or 0.6250 – 20	UN	2A	0.0013	0.6237	0.6156	...	0.5912	0.5869	0.004324	0.5696	0.5544	0.5624	...	0.0072	0.0054	0.5659	0.5586	0.0090	0.0075	
20		3A	0.0000	0.6250	0.6169	...	0.5925	0.5893	0.0032	0.5709	0.5568	0.5637	...	0.0072	0.0054	0.5672	0.5610	0.0090	0.0075	
$\frac{5}{8}$ – 24 or 0.6250 – 24	UNEF	2A	0.0012	0.6238	0.6166	...	0.5967	0.5927	0.004004	0.5787	0.5656	0.5727	...	0.0060	0.0045	0.5757	0.5691	0.0075	0.0063	
24		3A	0.0000	0.6250	0.6178	...	0.5979	0.5949	0.0030	0.5799	0.5678	0.5739	...	0.0060	0.0045	0.5769	0.5713	0.0075	0.0063	
$\frac{5}{8}$ – 28 or 0.6250 – 28	UN	2A	0.0011	0.6239	0.6174	...	0.6007	0.5969	0.003759	0.5852	0.5737	0.5801	...	0.0052	0.0039	0.5827	0.5767	0.0064	0.0054	
28		3A	0.0000	0.6250	0.6185	...	0.6018	0.5990	0.0028	0.5863	0.5758	0.5812	...	0.0052	0.0039	0.5838	0.5788	0.0064	0.0054	
$\frac{5}{8}$ – 32 or 0.6250 – 32	UN	2A	0.0011	0.6239	0.6179	...	0.6036	0.6000	0.003565	0.5901	0.5797	0.5856	...	0.0045	0.0034	0.5878	0.5823	0.0056	0.0047	
32		3A	0.0000	0.6250	0.6190	...	0.6047	0.6020	0.0027	0.5912	0.5817	0.5867	...	0.0045	0.0034	0.5889	0.5843	0.0056	0.0047	
(8) $\frac{11}{16}$ – 12 or 0.6875 – 12	UN	2A	0.0016	0.6859	0.6745	...	0.6318	0.6263	0.005485	0.5957	0.5722	0.5837	...	0.0120	0.0090	0.5897	0.5792	0.0150	0.0125	
12		3A	0.0000	0.6875	0.6761	...	0.6334	0.6293	0.0041	0.5973	0.5752	0.5853	...	0.0120	0.0090	0.5913	0.5822	0.0150	0.0125	
(8) $\frac{11}{16}$ – 16 or 0.6875 – 16	UN	2A	0.0014	0.6861	0.6767	...	0.6455	0.6407	0.004811	0.6184	0.6001	0.6094	...	0.0090	0.0068	0.6139	0.6053	0.0113	0.0094	
16		3A	0.0000	0.6875	0.6781	...	0.6469	0.6433	0.0036	0.6198	0.6027	0.6108	...	0.0090	0.0068	0.6153	0.6079	0.0113	0.0094	
(8) $\frac{11}{16}$ – 20 or 0.6875 – 20	UN	2A	0.0013	0.6862	0.6781	...	0.6537	0.6493	0.004366	0.6321	0.6168	0.6249	...	0.0072	0.0054	0.6284	0.6210	0.0090	0.0075	
(8) 20		3A	0.0000	0.6875	0.6794	...	0.6550	0.6517	0.0033	0.6334	0.6192	0.6262	...	0.0072	0.0054	0.6297	0.6234	0.0090	0.0075	
(8) $\frac{11}{16}$ – 24 or 0.6875 – 24	UNEF	2A	0.0012	0.6863	0.6791	...	0.6592	0.6552	0.004046	0.6412	0.6281	0.6352	...	0.0060	0.0045	0.6382	0.6316	0.0075	0.0063	
24		3A	0.0000	0.6875	0.6803	...	0.6604	0.6574	0.0030	0.6424	0.6303	0.6364	...	0.0060	0.0045	0.6394	0.6338	0.0075	0.0063	

Table 2A
Limits of Size for Standard Series External Threads (UN, UNR, and UNJ) (Cont'd)

Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Allowance, <i>es</i>	Major Diameter, <i>d</i>			Pitch Diameter, <i>d</i> ₂ , and Functional Diameter [Note (4)]			Minor Diameter, <i>d</i> ₁ /Root Radius									
										UN		UNR				UNJ			
										Reference Diameter [Notes (6), (7)]		Reference Diameter [Note (6)]		Radius		Diameter		Radius	
										Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
¹¹ / ₁₆ – 28 or 0.6875 – 28	UN	2A	0.0011	0.6864	0.6799	...	0.6632	0.6594	0.003801	0.6477	0.6362	0.6426	...	0.0052	0.0039	0.6452	0.6392	0.0064	0.0054
(8) 28		3A	0.0000	0.6875	0.6810	...	0.6643	0.6614	0.0029	0.6488	0.6382	0.6437	...	0.0052	0.0039	0.6463	0.6412	0.0064	0.0054
¹¹ / ₁₆ – 32 or 0.6875 – 32	UN	2A	0.0011	0.6864	0.6804	...	0.6661	0.6625	0.003607	0.6526	0.6422	0.6481	...	0.0045	0.0034	0.6503	0.6448	0.0056	0.0047
(8) 32		3A	0.0000	0.6875	0.6815	...	0.6672	0.6645	0.0027	0.6537	0.6442	0.6492	...	0.0045	0.0034	0.6514	0.6468	0.0056	0.0047
³ / ₄ – 10 or 0.7500 – 10	UNC	1A	0.0018	0.7482	0.7288	...	0.6832	0.6744	0.0088	0.6399	0.6094	0.6255	...	0.0144	0.0108	...	...	...	...
10		2A	0.0018	0.7482	0.7353	0.7288	0.6832	0.6773	0.005894	0.6399	0.6123	0.6255	...	0.0144	0.0108	0.6327	0.6207	0.0180	0.0150
10		3A	0.0000	0.7500	0.7371	...	0.6850	0.6806	0.0044	0.6417	0.6156	0.6273	...	0.0144	0.0108	0.6345	0.6240	0.0180	0.0150
³ / ₄ – 12 or 0.7500 – 12	UN	2A	0.0017	0.7483	0.7369	...	0.6942	0.6887	0.005524	0.6581	0.6346	0.6461	...	0.0120	0.0090	0.6521	0.6416	0.0150	0.0125
12		3A	0.0000	0.7500	0.7386	...	0.6959	0.6918	0.0041	0.6598	0.6377	0.6478	...	0.0120	0.0090	0.6538	0.6447	0.0150	0.0125
³ / ₄ – 16 or 0.7500 – 16	UNF	1A	0.0015	0.7485	0.7343	...	0.7079	0.7004	0.0075	0.6808	0.6598	0.6718	...	0.0090	0.0068	...	...	...	...
16		2A	0.0015	0.7485	0.7391	...	0.7079	0.7029	0.005024	0.6808	0.6623	0.6718	...	0.0090	0.0068	0.6763	0.6675	0.0113	0.0094
(8) 16		3A	0.0000	0.7500	0.7406	...	0.7094	0.7056	0.0038	0.6823	0.6650	0.6733	...	0.0090	0.0068	0.6778	0.6702	0.0113	0.0094
³ / ₄ – 20 or 0.7500 – 20	UNEF	2A	0.0013	0.7487	0.7406	...	0.7162	0.7118	0.004405	0.6946	0.6793	0.6874	...	0.0072	0.0054	0.6909	0.6835	0.0090	0.0075
20		3A	0.0000	0.7500	0.7419	...	0.7175	0.7142	0.0033	0.6959	0.6817	0.6887	...	0.0072	0.0054	0.6922	0.6859	0.0090	0.0075
³ / ₄ – 28 or 0.7500 – 28	UN	2A	0.0012	0.7488	0.7423	...	0.7256	0.7218	0.003840	0.7101	0.6986	0.7050	...	0.0052	0.0039	0.7076	0.7016	0.0064	0.0054
(8) 28		3A	0.0000	0.7500	0.7435	...	0.7268	0.7239	0.0029	0.7113	0.7007	0.7062	...	0.0052	0.0039	0.7088	0.7037	0.0064	0.0054
³ / ₄ – 32 or 0.7500 – 32	UN	2A	0.0011	0.7489	0.7429	...	0.7286	0.7250	0.003646	0.7151	0.7047	0.7106	...	0.0045	0.0034	0.7128	0.7073	0.0056	0.0047
32		3A	0.0000	0.7500	0.7440	...	0.7297	0.7270	0.0027	0.7162	0.7067	0.7117	...	0.0045	0.0034	0.7139	0.7093	0.0056	0.0047
¹³ / ₁₆ – 12 or 0.8125 – 12	UN	2A	0.0017	0.8108	0.7994	...	0.7567	0.7511	0.005561	0.7206	0.6970	0.7086	...	0.0120	0.0090	0.7146	0.7040	0.0150	0.0125
(8) 12		3A	0.0000	0.8125	0.8011	...	0.7584	0.7542	0.0042	0.7223	0.7001	0.7103	...	0.0120	0.0090	0.7163	0.7071	0.0150	0.0125
¹³ / ₁₆ – 16 or 0.8125 – 16	UN	2A	0.0015	0.8110	0.8016	...	0.7704	0.7655	0.004887	0.7433	0.7249	0.7343	...	0.0090	0.0068	0.7388	0.7301	0.0113	0.0094
(8) 16		3A	0.0000	0.8125	0.8031	...	0.7719	0.7682	0.0037	0.7448	0.7276	0.7358	...	0.0090	0.0068	0.7403	0.7328	0.0113	0.0094
¹³ / ₁₆ – 20 or 0.8125 – 20	UNEF	2A	0.0013	0.8112	0.8031	...	0.7787	0.7743	0.004442	0.7571	0.7418	0.7499	...	0.0072	0.0054	0.7534	0.7460	0.0090	0.0075
(8) 20		3A	0.0000	0.8125	0.8044	...	0.7800	0.7767	0.0033	0.7584	0.7442	0.7512	...	0.0072	0.0054	0.7547	0.7484	0.0090	0.0075
¹³ / ₁₆ – 28 or 0.8125 – 28	UN	2A	0.0012	0.8113	0.8048	...	0.7881	0.7842	0.003877	0.7726	0.7610	0.7675	...	0.0052	0.0039	0.7701	0.7640	0.0064	0.0054
(8) 28		3A	0.0000	0.8125	0.8060	...	0.7893	0.7864	0.0029	0.7738	0.7632	0.7687	...	0.0052	0.0039	0.7713	0.7662	0.0064	0.0054
¹³ / ₁₆ – 32 or 0.8125 – 32	UN	2A	0.0011	0.8114	0.8054	...	0.7911	0.7874	0.003683	0.7776	0.7671	0.7731	...	0.0045	0.0034	0.7753	0.7697	0.0056	0.0047
(8) 32		3A	0.0000	0.8125	0.8065	...	0.7922	0.7894	0.0028	0.7787	0.7691	0.7742	...	0.0045	0.0034	0.7764	0.7717	0.0056	0.0047

Table 2A
Limits of Size for Standard Series External Threads (UN, UNR, and UNJ) (Cont'd)

							Pitch Diameter, <i>d</i> ₂ , and Functional Diameter [Note (4)]		Minor Diameter, <i>d</i> ₁ /Root Radius												
Major Diameter, <i>d</i>		UN		UNR					UNJ												
				Reference Diameter [Notes (6), (7)]	Reference Diameter [Note (6)]	Radius			Diameter		Radius										
Nominal Size and Threads/in.	Series Designa- tion	Class [Note (1)]	Allowance, <i>es</i>	Max. [Note (2)]	Min.	Min. [Note (3)]	Max. [Note (2)]	Tolerance, <i>Td</i> ₂ [Note (5)]	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.			
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
$\frac{7}{8}$ – 9 or 0.8750 – 9	UNC	1A	0.0019	0.8731	0.8523	...	0.8009	0.7914	0.0095	0.7528	0.7192	0.7368	...	0.0160	0.0120	...	...	...	...		
		2A	0.0019	0.8731	0.8592	0.8523	0.8009	0.7946	0.006305	0.7528	0.7224	0.7368	...	0.0160	0.0120	0.7448	0.7317	0.0200	0.0167		
		3A	0.0000	0.8750	0.8611	...	0.8028	0.7981	0.0047	0.7547	0.7259	0.7387	...	0.0160	0.0120	0.7467	0.7352	0.0200	0.0167		
(8) (8)	$\frac{7}{8}$ – 12 or 0.8750 – 12	UN		2A	0.0017	0.8733	0.8619	...	0.8192	0.8136	0.005596	0.7831	0.7595	0.7711	...	0.0120	0.0090	0.7771	0.7665	0.0150	0.0125
	12			3A	0.0000	0.8750	0.8636	...	0.8209	0.8167	0.0042	0.7848	0.7626	0.7728	...	0.0120	0.0090	0.7788	0.7696	0.0150	0.0125
(8) (8) (8)	$\frac{7}{8}$ – 14 or 0.8750 – 14	UNF		1A	0.0016	0.8734	0.8579	...	0.8270	0.8189	0.0081	0.7961	0.7725	0.7858	...	0.0103	0.0077	...	...	...	...
	14			2A	0.0016	0.8734	0.8631	...	0.8270	0.8216	0.005420	0.7961	0.7752	0.7858	...	0.0103	0.0077	0.7909	0.7812	0.0129	0.0107
	14			3A	0.0000	0.8750	0.8647	...	0.8286	0.8245	0.0041	0.7977	0.7781	0.7874	...	0.0103	0.0077	0.7925	0.7841	0.0129	0.0107
(8) (8)	$\frac{7}{8}$ – 16 or 0.8750 – 16	UN		2A	0.0015	0.8735	0.8641	...	0.8329	0.8280	0.004922	0.8058	0.7874	0.7968	...	0.0090	0.0068	0.8013	0.7926	0.0113	0.0094
	16			3A	0.0000	0.8750	0.8656	...	0.8344	0.8307	0.0037	0.8073	0.7901	0.7983	...	0.0090	0.0068	0.8028	0.7953	0.0113	0.0094
(8) (8)	$\frac{7}{8}$ – 20 or 0.8750 – 20	UNEF		2A	0.0013	0.8737	0.8656	...	0.8412	0.8367	0.004477	0.8196	0.8042	0.8124	...	0.0072	0.0054	0.8159	0.8084	0.0090	0.0075
	20			3A	0.0000	0.8750	0.8669	...	0.8425	0.8391	0.0034	0.8209	0.8066	0.8137	...	0.0072	0.0054	0.8172	0.8108	0.0090	0.0075
(8) (8)	$\frac{7}{8}$ – 28 or 0.8750 – 28	UN		2A	0.0012	0.8738	0.8673	...	0.8506	0.8467	0.003912	0.8351	0.8235	0.8300	...	0.0052	0.0039	0.8326	0.8265	0.0064	0.0054
	28			3A	0.0000	0.8750	0.8685	...	0.8518	0.8489	0.0029	0.8363	0.8257	0.8312	...	0.0052	0.0039	0.8338	0.8287	0.0064	0.0054
(8) (8)	$\frac{7}{8}$ – 32 or 0.8750 – 32	UN		2A	0.0011	0.8739	0.8679	...	0.8536	0.8499	0.003718	0.8401	0.8296	0.8356	...	0.0045	0.0034	0.8378	0.8322	0.0056	0.0047
	32			3A	0.0000	0.8750	0.8690	...	0.8547	0.8519	0.0028	0.8412	0.8316	0.8367	...	0.0045	0.0034	0.8389	0.8342	0.0056	0.0047
(8) (8)	$\frac{15}{16}$ – 12 or 0.9375 – 12	UN		2A	0.0017	0.9358	0.9244	...	0.8817	0.8761	0.005629	0.8456	0.8220	0.8336	...	0.0120	0.0090	0.8396	0.8290	0.0150	0.0125
	12			3A	0.0000	0.9375	0.9261	...	0.8834	0.8792	0.0042	0.8473	0.8251	0.8353	...	0.0120	0.0090	0.8413	0.8321	0.0150	0.0125
(8) (8)	$\frac{15}{16}$ – 16 or 0.9375 – 16	UN		2A	0.0015	0.9360	0.9266	...	0.8954	0.8904	0.004955	0.8683	0.8498	0.8593	...	0.0090	0.0068	0.8638	0.8550	0.0113	0.0094
	16			3A	0.0000	0.9375	0.9281	...	0.8969	0.8932	0.0037	0.8698	0.8526	0.8608	...	0.0090	0.0068	0.8653	0.8578	0.0113	0.0094
(8) (8)	$\frac{15}{16}$ – 20 or 0.9375 – 20	UNEF		2A	0.0014	0.9361	0.9280	...	0.9036	0.8991	0.004510	0.8820	0.8666	0.8748	...	0.0072	0.0054	0.8783	0.8708	0.0090	0.0075
	20			3A	0.0000	0.9375	0.9294	...	0.9050	0.9016	0.0034	0.8834	0.8691	0.8762	...	0.0072	0.0054	0.8797	0.8733	0.0090	0.0075
(8) (8)	$\frac{15}{16}$ – 28 or 0.9375 – 28	UN		2A	0.0012	0.9363	0.9298	...	0.9131	0.9092	0.003945	0.8976	0.8860	0.8925	...	0.0052	0.0039	0.8951	0.8890	0.0064	0.0054
	28			3A	0.0000	0.9375	0.9310	...	0.9143	0.9113	0.0030	0.8988	0.8881	0.8937	...	0.0052	0.0039	0.8963	0.8911	0.0064	0.0054
(8) (8)	$\frac{15}{16}$ – 32 or 0.9375 – 32	UN		2A	0.0011	0.9364	0.9304	...	0.9161	0.9123	0.003751	0.9026	0.8920	0.8981	...	0.0045	0.0034	0.9003	0.8946	0.0056	0.0047
	32			3A	0.0000	0.9375	0.9315	...	0.9172	0.9144	0.0028	0.9037	0.8941	0.8992	...	0.0045	0.0034	0.9014	0.8967	0.0056	0.0047

Table 2A
Limits of Size for Standard Series External Threads (UN, UNR, and UNJ) (Cont'd)

							Minor Diameter, d_1 /Root Radius													
							Pitch Diameter, d_2 , and Functional Diameter [Note (4)]		UN		UNR				UNJ					
									Reference Diameter [Notes (6), (7)]	Reference Diameter [Note (6)]	Radius	Diameter	Radius							
Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Allowance, es	Max. [Note (2)]	Min.	Min. [Note (3)]	Max. [Note (2)]	Min.	Tolerance, T_{d_2} [Note (5)]	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
1 – 8 or 1.0000 – 8	UNC	1A	0.0020	0.9980	0.9755	...	0.9168	0.9067	0.0101	0.8627	0.8255	0.8446	...	0.0180	0.0135	...	...	...	...	
8		2A	0.0020	0.9980	0.9830	0.9755	0.9168	0.9100	0.006750	0.8627	0.8289	0.8446	...	0.0180	0.0135	0.8537	0.8394	0.0226	0.0188	
8		3A	0.0000	1.0000	0.9850	...	0.9188	0.9137	0.0051	0.8647	0.8325	0.8466	...	0.0180	0.0135	0.8557	0.8430	0.0226	0.0188	
1 – 12 or 1.000 – 12	UNF	1A	0.0018	0.9982	0.9810	...	0.9441	0.9353	0.0088	0.9080	0.8812	0.8960	...	0.0120	0.0090	...	...	...	...	
12		2A	0.0018	0.9982	0.9868	...	0.9441	0.9382	0.005862	0.9080	0.8841	0.8960	...	0.0120	0.0090	0.9020	0.8911	0.0150	0.0125	
12		3A	0.0000	1.0000	0.9886	...	0.9459	0.9415	0.0044	0.9098	0.8874	0.8978	...	0.0120	0.0090	0.9038	0.8944	0.0150	0.0125	
(8), (9)	1 – 14 or 1.0000 – 14	UNS	2A	0.0016	0.9984	0.9881	...	0.9520	0.9467	0.005285	0.9211	0.9003	0.9108	...	0.0103	0.0077	0.9159	0.9063	0.0129	0.0107
(8)	14		3A	0.0000	1.0000	0.9897	...	0.9536	0.9496	0.0040	0.9227	0.9032	0.9124	...	0.0103	0.0077	0.9175	0.9092	0.0129	0.0107
1 – 16 or 1.0000 – 16	UN	2A	0.0015	0.9985	0.9891	...	0.9579	0.9529	0.004987	0.9308	0.9123	0.9218	...	0.0090	0.0068	0.9263	0.9175	0.0113	0.0094	
16		3A	0.0000	1.0000	0.9906	...	0.9594	0.9557	0.0037	0.9323	0.9151	0.9233	...	0.0090	0.0068	0.9278	0.9203	0.0113	0.0094	
1 – 20 or 1.0000 – 20	UNEF	2A	0.0014	0.9986	0.9905	...	0.9661	0.9616	0.004542	0.9445	0.9291	0.9373	...	0.0072	0.0054	0.9408	0.9333	0.0000	0.0075	
20		3A	0.0000	1.0000	0.9919	...	0.9675	0.9641	0.0034	0.9459	0.9316	0.9387	...	0.0072	0.0054	0.9422	0.9358	0.0090	0.0075	
1 – 28 or 1.0000 – 28	UN	2A	0.0012	0.9988	0.9923	...	0.9756	0.9716	0.003977	0.9601	0.9484	0.9550	...	0.0052	0.0039	0.9576	0.9514	0.0064	0.0054	
28		3A	0.0000	1.0000	0.9935	...	0.9768	0.9738	0.0030	0.9613	0.9506	0.9562	...	0.0052	0.0039	0.9588	0.9536	0.0064	0.0054	
1 – 32 or 1.0000 – 32	UN	2A	0.0011	0.9989	0.9929	...	0.9786	0.9748	0.003783	0.9651	0.9545	0.9606	...	0.0045	0.0034	0.9628	0.9571	0.0056	0.0047	
32		3A	0.0000	1.0000	0.9940	...	0.9797	0.9769	0.0028	0.9662	0.9566	0.9617	...	0.0045	0.0034	0.9639	0.9592	0.0056	0.0047	
1 $\frac{1}{16}$ – 8 or 1.0625 – 8	UN	2A	0.0020	1.0605	1.0455	...	0.9793	0.9725	0.006827	0.9252	0.8913	0.9071	...	0.0180	0.0135	0.9162	0.9018	0.0226	0.0188	
8		3A	0.0000	1.0625	1.0475	...	0.9813	0.9762	0.0051	0.9272	0.8950	0.9091	...	0.0180	0.0135	0.9182	0.9055	0.0226	0.0188	
1 $\frac{1}{16}$ – 12 or 1.0625 – 12	UN	2A	0.0017	1.0608	1.0494	...	1.0067	1.0010	0.005692	0.9706	0.9469	0.9586	...	0.0120	0.0090	0.9646	0.9539	0.0150	0.0125	
(8)	12		3A	0.0000	1.0625	1.0511	...	1.0084	1.0041	0.0043	0.9723	0.9500	0.9603	...	0.0120	0.0090	0.9663	0.9570	0.0150	0.0125
1 $\frac{1}{16}$ – 16 or 1.0625 – 16	UN	2A	0.0015	1.0610	1.0516	...	1.0204	1.0154	0.005018	0.9933	0.9748	0.9843	...	0.0090	0.0068	0.9888	0.9800	0.0113	0.0094	
(8)	16		3A	0.0000	1.0625	1.0531	...	1.0219	1.0181	0.0038	0.9948	0.9775	0.9858	...	0.0090	0.0068	0.9903	0.9827	0.0113	0.0094
(8)	1 $\frac{1}{16}$ – 18 or 1.0625 – 18	UNEF	2A	0.0014	1.0611	1.0524	...	1.0250	1.0202	0.004776	1.0010	0.9841	0.9929	...	0.0080	0.0060	0.9969	0.9888	0.0100	0.0083
(8)	18		3A	0.0000	1.0625	1.0538	...	1.0264	1.0228	0.0036	1.0024	0.9867	0.9943	...	0.0080	0.0060	0.9983	0.9914	0.0100	0.0083
(8)	1 $\frac{1}{16}$ – 20 or 1.0625 – 20	UN	2A	0.0014	1.0611	1.0530	...	1.0286	1.0240	0.004573	1.0070	0.9915	0.9998	...	0.0072	0.0054	1.0033	0.9957	0.0090	0.0075
(8)	20		3A	0.0000	1.0625	1.0544	...	1.0300	1.0266	0.0034	1.0084	0.9941	1.0012	...	0.0072	0.0054	1.0047	0.9983	0.0090	0.0075

Table 2A
Limits of Size for Standard Series External Threads (UN, UNR, and UNJ) (Cont'd)

							Major Diameter, <i>d</i>		Pitch Diameter, <i>d</i> ₂ , and Functional Diameter [Note (4)]		Minor Diameter, <i>d</i> ₁ /Root Radius								
						UN					UNR			UNJ					
						Reference Diameter [Notes (6), (7)]					Reference Diameter [Note (6)]		Radius		Diameter		Radius		
Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Allowance, <i>es</i>	Max. [Note (2)]	Min.	Min. [Note (3)]	Max. [Note (2)]	Min.	Tolerance, <i>Td</i> ₂ [Note (5)]	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
1 ¹ / ₁₆ – 28 or 1.0625 – 28	UN	2A	0.0012	1.0613	1.0548	...	1.0381	1.0341	0.004008	1.0226	1.0109	1.0175	...	0.0052	0.0039	1.0201	1.0139	0.0064	0.0054
		3A	0.0000	1.0625	1.0560	...	1.0393	1.0363	0.0030	1.0238	1.0131	1.0187	...	0.0052	0.0039	1.0213	1.0161	0.0064	0.0054
(8) 1 ¹ / ₈ – 7 or 1.1250 – 7	UNC	1A	0.0022	1.1228	1.0982	...	1.0300	1.0191	0.0109	0.9682	0.9263	0.9475	...	0.0206	0.0155	...	...	...	...
		2A	0.0022	1.1228	1.1064	1.0982	1.0300	1.0227	0.007250	0.9682	0.9300	0.9475	...	0.0206	0.0155	0.9578	0.9420	0.0258	0.0214
		3A	0.0000	1.1250	1.1086	...	1.0322	1.0268	0.0054	0.9704	0.9340	0.9497	...	0.0206	0.0155	0.9600	0.9460	0.0258	0.0214
1 ¹ / ₈ – 8 or 1.1250 – 8	UN	2A	0.0021	1.1229	1.1079	1.1004	1.0417	1.0348	0.006901	0.9876	0.9536	0.9695	...	0.0180	0.0135	0.9786	0.9641	0.0226	0.0188
		3A	0.0000	1.1250	1.1100	...	1.0438	1.0386	0.0052	0.9897	0.9574	0.9716	...	0.0180	0.0135	0.9807	0.9679	0.0226	0.0188
1 ¹ / ₈ – 12 or 1.1250 – 12	UNF	1A	0.0018	1.1232	1.1060	...	1.0691	1.0601	0.0090	1.0330	1.0060	1.0210	...	0.0120	0.0090	...	...	...	...
		2A	0.0018	1.1232	1.1118	...	1.0691	1.0631	0.006013	1.0330	1.0090	1.0210	...	0.0120	0.0090	1.0270	1.0160	0.0150	0.0125
		3A	0.0000	1.1250	1.1136	...	1.0709	1.0664	0.0045	1.0348	1.0123	1.0228	...	0.0120	0.0090	1.0288	1.0193	0.0150	0.0125
(8) 1 ¹ / ₈ – 16 or 1.1250 – 16	UN	2A	0.0015	1.1235	1.1141	...	1.0829	1.0779	0.005047	1.0558	1.0373	1.0468	...	0.0090	0.0068	1.0513	1.0425	0.0113	0.0094
		3A	0.0000	1.1250	1.1156	...	1.0844	1.0806	0.0038	1.0573	1.0400	1.0483	...	0.0090	0.0068	1.0528	1.0452	0.0113	0.0094
(8) 1 ¹ / ₈ – 18 or 1.1250 – 18	UNEF	2A	0.0014	1.1236	1.1149	...	1.0875	1.0827	0.004805	1.0635	1.0466	1.0554	...	0.0080	0.0060	1.0594	1.0513	0.0100	0.0083
		3A	0.0000	1.1250	1.1163	...	1.0889	1.0853	0.0036	1.0649	1.0492	1.0568	...	0.0080	0.0060	1.0608	1.0539	0.0100	0.0083
(8) 1 ¹ / ₈ – 20 or 1.1250 – 20	UN	2A	0.0014	1.1236	1.1155	...	1.0911	1.0865	0.004602	1.0695	1.0540	1.0623	...	0.0072	0.0054	1.0658	1.0582	0.0090	0.0075
		3A	0.0000	1.1250	1.1169	...	1.0925	1.0890	0.0035	1.0709	1.0565	1.0637	...	0.0072	0.0054	1.0672	1.0607	0.0090	0.0075
1 ¹ / ₈ – 28 or 1.1250 – 28	UN	2A	0.0012	1.1238	1.1173	...	1.1006	1.0966	0.004037	1.0851	1.0734	1.0800	...	0.0052	0.0039	1.0826	1.0764	0.0064	0.0054
		3A	0.0000	1.1250	1.1185	...	1.1018	1.0988	0.0030	1.0863	1.0756	1.0812	...	0.0052	0.0039	1.0838	1.0786	0.0064	0.0054
1 ³ / ₁₆ – 8 or 1.1875 – 8	UN	2A	0.0021	1.1854	1.1704	...	1.1042	1.0972	0.006973	1.0501	1.0160	1.0320	...	0.0180	0.0135	1.0411	1.0265	0.0226	0.0188
		3A	0.0000	1.1875	1.1725	...	1.1063	1.1011	0.0052	1.0522	1.0199	1.0341	...	0.0180	0.0135	1.0432	1.0304	0.0226	0.0188
(8) 1 ³ / ₁₆ – 12 or 1.1875 – 12	UN	2A	0.0017	1.1858	1.1744	...	1.1317	1.1260	0.005749	1.0956	1.0719	1.0836	...	0.0120	0.0090	1.0896	1.0789	0.0150	0.0125
		3A	0.0000	1.1875	1.1761	...	1.1334	1.1291	0.0043	1.0973	1.0750	1.0853	...	0.0120	0.0090	1.0913	1.0820	0.0150	0.0125
(8) 1 ³ / ₁₆ – 16 or 1.1875 – 16	UN	2A	0.0015	1.1860	1.1766	...	1.1454	1.1403	0.005075	1.1183	1.0997	1.1093	...	0.0090	0.0068	1.1138	1.1049	0.0113	0.0094
		3A	0.0000	1.1875	1.1781	...	1.1469	1.1431	0.0038	1.1198	1.1025	1.1108	...	0.0090	0.0068	1.1153	1.1077	0.0113	0.0094
(8) 1 ³ / ₁₆ – 18 or 1.1875 – 18	UNEF	2A	0.0014	1.1861	1.1774	...	1.1500	1.1452	0.004833	1.1260	1.1091	1.1179	...	0.0080	0.0060	1.1219	1.1138	0.0100	0.0083
		3A	0.0000	1.1875	1.1788	...	1.1514	1.1478	0.0036	1.1274	1.1117	1.1193	...	0.0080	0.0060	1.1233	1.1164	0.0100	0.0083
(8) 1 ³ / ₁₆ – 20 or 1.1875 – 20	UN	2A	0.0014	1.1861	1.1780	...	1.1536	1.1490	0.004630	1.1320	1.1165	1.1248	...	0.0072	0.0054	1.1283	1.1207	0.0090	0.0075
		3A	0.0000	1.1875	1.1794	...	1.1550	1.1515	0.0035	1.1334	1.1190	1.1262	...	0.0072	0.0054	1.1297	1.1232	0.0090	0.0075

Table 2A
Limits of Size for Standard Series External Threads (UN, UNR, and UNJ) (Cont'd)

							Minor Diameter, d_1 /Root Radius													
							Pitch Diameter, d_2 , and Functional Diameter [Note (4)]		UN		UNR				UNJ					
									Reference Diameter [Notes (6), (7)]	Reference Diameter [Note (6)]	Radius	Diameter	Radius							
Nominal Size and Threads/in.	Series Designa- tion	Class [Note (1)]	Allowance, es	Max. [Note (2)]	Min.	Min. [Note (3)]	Max. [Note (2)]	Min.	Tolerance, T_{d_2} [Note (5)]	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
$1\frac{3}{16}$ – 28 or 1.1875 – 28	UN	2A	0.0012	1.1863	1.1798	...	1.1631	1.1590	0.004065	1.1476	1.1358	1.1425	...	0.0052	0.0039	1.1451	1.1388	0.0064	0.0054	
		3A	0.0000	1.1875	1.1810	...	1.1643	1.1613	0.0031	1.1488	1.1380	1.1437	...	0.0052	0.0039	1.1463	1.1410	0.0064	0.0054	
$1\frac{1}{4}$ – 7 or 1.2500 – 7	UNC	1A	0.0022	1.2478	1.2232	...	1.1550	1.1439	0.0111	1.0932	1.0511	1.0725	...	0.0206	0.0155	...	...	...	...	
		2A	0.0022	1.2478	1.2314	1.2232	1.1550	1.1476	0.007392	1.0932	1.0548	1.0725	...	0.0206	0.0155	1.0828	1.0668	0.0258	0.0214	
		3A	0.0000	1.2500	1.2336	...	1.1572	1.1517	0.0055	1.0954	1.0589	1.0747	...	0.0206	0.0155	1.0850	1.0709	0.0258	0.0214	
$1\frac{1}{4}$ – 8 or 1.2500 – 8	UN	2A	0.0021	1.2479	1.2329	1.2254	1.1667	1.1597	0.007043	1.1126	1.0785	1.0945	...	0.0180	0.0135	1.1036	1.0890	0.0226	0.0188	
		3A	0.0000	1.2500	1.2350	...	1.1688	1.1635	0.0053	1.1147	1.0823	1.0966	...	0.0180	0.0135	1.1057	1.0928	0.0226	0.0188	
$1\frac{1}{4}$ – 12 or 1.2500 – 12	UNF	1A	0.0018	1.2482	1.2310	...	1.1941	1.1849	0.0092	1.1580	1.1308	1.1460	...	0.0120	0.0090	...	...	...	...	
		2A	0.0018	1.2482	1.2368	...	1.1941	1.1879	0.006155	1.1580	1.1338	1.1460	...	0.0120	0.0090	1.1520	1.1408	0.0150	0.0125	
		3A	0.0000	1.2500	1.2386	...	1.1959	1.1913	0.0046	1.1598	1.1372	1.1478	...	0.0120	0.0090	1.1538	1.1442	0.0150	0.0125	
$1\frac{1}{4}$ – 16 or 1.2500 – 16	UN	2A	0.0015	1.2485	1.2391	...	1.2079	1.2028	0.005103	1.1808	1.1622	1.1718	...	0.0090	0.0068	1.1763	1.1674	0.0113	0.0094	
		3A	0.0000	1.2500	1.2406	...	1.2094	1.2056	0.0038	1.1823	1.1650	1.1733	...	0.0090	0.0068	1.1778	1.1702	0.0113	0.0094	
$1\frac{1}{4}$ – 18 or 1.2500 – 18	UNEF	2A	0.0015	1.2485	1.2398	...	1.2124	1.2075	0.004861	1.1884	1.1714	1.1803	...	0.0080	0.0060	1.1843	1.1761	0.0100	0.0083	
		3A	0.0000	1.2500	1.2413	...	1.2139	1.2103	0.0036	1.1899	1.1742	1.1818	...	0.0080	0.0060	1.1858	1.1789	0.0100	0.0083	
$1\frac{1}{4}$ – 20 or 1.2500 – 20	UN	2A	0.0014	1.2486	1.2405	...	1.2161	1.2114	0.004658	1.1945	1.1789	1.1873	...	0.0072	0.0054	1.1908	1.1831	0.0090	0.0075	
		3A	0.0000	1.2500	1.2419	...	1.2175	1.2140	0.0035	1.1959	1.1815	1.1887	...	0.0072	0.0054	1.1922	1.1857	0.0090	0.0075	
$1\frac{1}{4}$ – 28 or 1.2500 – 28	UN	2A	0.0012	1.2488	1.2423	...	1.2256	1.2215	0.004093	1.2101	1.1983	1.2050	...	0.0052	0.0039	1.2076	1.2013	0.0064	0.0054	
		3A	0.0000	1.2500	1.2435	...	1.2268	1.2237	0.0031	1.2113	1.2005	1.2062	...	0.0052	0.0039	1.2088	1.2035	0.0064	0.0054	
$1\frac{5}{16}$ – 8 or 1.3125 – 8	UN	2A	0.0021	1.3104	1.2954	...	1.2292	1.2221	0.007110	1.1751	1.1409	1.1570	...	0.0180	0.0135	1.1661	1.1514	0.0226	0.0188	
		3A	0.0000	1.3125	1.2975	...	1.2313	1.2260	0.0053	1.1772	1.1448	1.1591	...	0.0180	0.0135	1.1682	1.1553	0.0226	0.0188	
$1\frac{5}{16}$ – 12 or 1.3125 – 12	UN	2A	0.0017	1.3108	1.2994	...	1.2567	1.2509	0.005803	1.2206	1.1968	1.2086	...	0.0120	0.0090	1.2146	1.2038	0.0150	0.0125	
		3A	0.0000	1.3125	1.3011	...	1.2584	1.2540	0.0044	1.2223	1.1999	1.2103	...	0.0120	0.0090	1.2163	1.2069	0.0150	0.0125	
$1\frac{5}{16}$ – 16 or 1.3125 – 16	UN	2A	0.0015	1.3110	1.3016	...	1.2704	1.2653	0.005129	1.2433	1.2247	1.2343	...	0.0090	0.0068	1.2388	1.2299	0.0113	0.0094	
		3A	0.0000	1.3125	1.3031	...	1.2719	1.2681	0.0038	1.2448	1.2275	1.2358	...	0.0090	0.0068	1.2403	1.2327	0.0113	0.0094	
$1\frac{5}{16}$ – 18 or 1.3125 – 18	UNEF	2A	0.0015	1.3110	1.3023	...	1.2749	1.2700	0.004887	1.2509	1.2339	1.2428	...	0.0080	0.0060	1.2468	1.2386	0.0100	0.0083	
		3A	0.0000	1.3125	1.3038	...	1.2764	1.2727	0.0037	1.2524	1.2366	1.2443	...	0.0080	0.0060	1.2483	1.2413	0.0100	0.0083	
$1\frac{5}{16}$ – 20 or 1.3125 – 20	UN	2A	0.0014	1.3111	1.3030	...	1.2786	1.2739	0.004684	1.2570	1.2414	1.2498	...	0.0072	0.0054	1.2533	1.2456	0.0090	0.0075	
		3A	0.0000	1.3125	1.3044	...	1.2800	1.2765	0.0035	1.2584	1.2440	1.2512	...	0.0072	0.0054	1.2547	1.2482	0.0090	0.0075	

Table 2A
Limits of Size for Standard Series External Threads (UN, UNR, and UNJ) (Cont'd)

Nominal Size and Threads/in.	Series Designa- tion	Class [Note (1)]	Allowance, <i>es</i>	Major Diameter, <i>d</i>			Pitch Diameter, <i>d</i> ₂ , and Functional Diameter [Note (4)]		Tolerance, <i>Td</i> ₂ [Note (5)]	Minor Diameter, <i>d</i> ₁ /Root Radius									
										UN		UNR				UNJ			
										Reference Diameter [Notes (6), (7)]	Reference Diameter [Note (6)]	Radius		Diameter		Radius			
1	2	3	4	Max. [Note (2)]	Min.	Min. [Note (3)]	Max. [Note (2)]	Min.	10	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
(8) 1 ⁵ / ₁₆ – 28 or 1.3125 – 28	UN	2A	0.0012	1.3113	1.3048	...	1.2881	1.2840	0.004119	1.2726	1.2608	1.2675	...	0.0052	0.0039	1.2701	1.2638	0.0064	0.0054
28		3A	0.0000	1.3125	1.3060	...	1.2893	1.2862	0.0031	1.2738	1.263	1.2687	...	0.0052	0.0039	1.2713	1.2660	0.0064	0.0054
1 ³ / ₈ – 6 or 1.3750 – 6	UNC	1A	0.0024	1.3726	1.3453	...	1.2643	1.2523	0.012	1.1922	1.1440	1.1681	...	0.0241	0.0180	...	...	...	...
6		2A	0.0024	1.3726	1.3544	1.3453	1.2643	1.2563	0.007970	1.1922	1.1480	1.1681	...	0.0241	0.0180	1.1801	1.1620	0.0301	0.0250
6		3A	0.0000	1.3750	1.3568	...	1.2667	1.2607	0.0060	1.1946	1.1524	1.1705	...	0.0241	0.0180	1.1825	1.1664	0.0301	0.0250
1 ³ / ₈ – 8 or 1.3750 – 8	UN	2A	0.0022	1.3728	1.3578	1.3503	1.2916	1.2844	0.007177	1.2375	1.2032	1.2194	...	0.0180	0.0135	1.2285	1.2137	0.0226	0.0188
8		3A	0.0000	1.3750	1.3600	...	1.2938	1.2884	0.0054	1.2397	1.2072	1.2216	...	0.0180	0.0135	1.2307	1.2177	0.0226	0.0188
1 ³ / ₈ – 12 or 1.3750 – 12	UNF	1A	0.0019	1.3731	1.3559	...	1.3190	1.3096	0.0094	1.2829	1.2555	1.2709	...	0.0120	0.0090	...	...	...	...
12		2A	0.0019	1.3731	1.3617	...	1.3190	1.3127	0.006289	1.2829	1.2586	1.2709	...	0.0120	0.0090	1.2769	1.2656	0.0150	0.0125
12		3A	0.0000	1.3750	1.3636	...	1.3209	1.3162	0.0047	1.2848	1.2621	1.2728	...	0.0120	0.0090	1.2788	1.2691	0.0150	0.0125
(8) 1 ³ / ₈ – 16 or 1.3750 – 16	UN	2A	0.0015	1.3735	1.3641	...	1.3329	1.3277	0.005155	1.3058	1.2871	1.2968	...	0.0090	0.0068	1.3013	1.2923	0.0113	0.0094
(8) 16		3A	0.0000	1.3750	1.3656	...	1.3344	1.3305	0.0039	1.3073	1.2899	1.2983	...	0.0090	0.0068	1.3028	1.2951	0.0113	0.0094
(8) 1 ³ / ₈ – 18 or 1.3750 – 18	UNEF	2A	0.0015	1.3735	1.3648	...	1.3374	1.3325	0.004913	1.3134	1.2964	1.3053	...	0.0080	0.0060	1.3093	1.3011	0.0100	0.0083
(8) 18		3A	0.0000	1.3750	1.3663	...	1.3389	1.3352	0.0037	1.3149	1.2991	1.3068	...	0.0080	0.0060	1.3108	1.3038	0.0100	0.0083
1 ³ / ₈ – 20 or 1.3750 – 20	UN	2A	0.0014	1.3736	1.3655	...	1.3411	1.3364	0.004710	1.3195	1.3039	1.3123	...	0.0072	0.0054	1.3158	1.3081	0.0090	0.0075
(8) 20		3A	0.0000	1.3750	1.3669	...	1.3425	1.3390	0.003500	1.3209	1.3065	1.3137	...	0.0072	0.0054	1.3172	1.3107	0.0090	0.0075
(8) 1 ³ / ₈ – 28 or 1.3750 – 28	UN	2A	0.0012	1.3738	1.3673	...	1.3506	1.3465	0.004145	1.3351	1.3233	1.3300	...	0.0052	0.0039	1.3326	1.3263	0.0064	0.0054
28		3A	0.0000	1.3750	1.3685	...	1.3518	1.3487	0.0031	1.3363	1.3255	1.3312	...	0.0052	0.0039	1.3338	1.3285	0.0064	0.0054
1 ⁷ / ₁₆ – 6 or 1.4375 – 6	UN	2A	0.0024	1.4351	1.4169	...	1.3268	1.3188	0.008034	1.2547	1.2105	1.2306	...	0.0241	0.0180	1.2426	1.2245	0.0301	0.0250
6		3A	0.0000	1.4375	1.4193	...	1.3292	1.3232	0.0060	1.2571	1.2149	1.2330	...	0.0241	0.0180	1.2450	1.2289	0.0301	0.0250
1 ⁷ / ₁₆ – 8 or 1.4375 – 8	UN	2A	0.0022	1.4353	1.4203	...	1.3541	1.3469	0.007241	1.3000	1.2657	1.2819	...	0.0180	0.0135	1.2910	1.2762	0.0226	0.0188
8		3A	0.0000	1.4375	1.4225	...	1.3563	1.3509	0.0054	1.3022	1.2697	1.2841	...	0.0180	0.0135	1.2932	1.2802	0.0226	0.0188
1 ⁷ / ₁₆ – 12 or 1.4375 – 12	UN	2A	0.0018	1.4357	1.4243	...	1.3816	1.3757	0.005854	1.3455	1.3216	1.3335	...	0.0120	0.0090	1.3395	1.3286	0.0150	0.0125
12		3A	0.0000	1.4375	1.4261	...	1.3834	1.3790	0.0044	1.3473	1.3249	1.3353	...	0.0120	0.0090	1.3413	1.3319	0.0150	0.0125
(8) 1 ⁷ / ₁₆ – 16 or 1.4375 – 16	UN	2A	0.0016	1.4359	1.4265	...	1.3953	1.3901	0.005180	1.3682	1.3495	1.3592	...	0.0090	0.0068	1.3637	1.3547	0.0113	0.0094
(8) 16		3A	0.0000	1.4375	1.4281	...	1.3969	1.3930	0.0039	1.3698	1.3524	1.3608	...	0.0090	0.0068	1.3653	1.3576	0.0113	0.0094
(8) 1 ⁷ / ₁₆ – 18 or 1.4375 – 18	UNEF	2A	0.0015	1.4360	1.4273	...	1.3999	1.3950	0.004938	1.3759	1.3589	1.3678	...	0.0080	0.0060	1.3718	1.3636	0.0100	0.0083
18		3A	0.0000	1.4375	1.4288	...	1.4014	1.3977	0.0037	1.3774	1.3616	1.3693	...	0.0080	0.0060	1.3733	1.3663	0.0100	0.0083

Table 2A
Limits of Size for Standard Series External Threads (UN, UNR, and UNJ) (Cont'd)

							Minor Diameter, d_1 /Root Radius													
							Pitch Diameter, d_2 , and Functional Diameter [Note (4)]		UN		UNR				UNJ					
									Reference Diameter [Notes (6), (7)]	Reference Diameter [Note (6)]	Radius	Diameter		Radius						
Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Allowance, es	Max. [Note (2)]	Min.	Min. [Note (3)]	Max. [Note (2)]	Min.	Tolerance, T_{d_2} [Note (5)]	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
(8) $1\frac{7}{16}$ – 20 or 1.4375 – 20	UN	2A	0.0014	1.4361	1.4280	...	1.4036	1.3989	0.004735	1.3820	1.3664	1.3748	...	0.0072	0.0054	1.3783	1.3706	0.0090	0.0075	
(8) 20		3A	0.0000	1.4375	1.4294	...	1.4050	1.4014	0.0036	1.3834	1.3689	1.3762	...	0.0072	0.0054	1.3797	1.3731	0.0090	0.0075	
(8) $1\frac{7}{16}$ – 28 or 1.4375 – 28	UN	2A	0.0013	1.4362	1.4297	...	1.4130	1.4088	0.004170	1.3975	1.3856	1.3924	...	0.0052	0.0039	1.3950	1.3886	0.0064	0.0054	
28		3A	0.0000	1.4375	1.4310	...	1.4143	1.4112	0.0031	1.3988	1.3880	1.3937	...	0.0052	0.0039	1.3963	1.3910	0.0064	0.0054	
$1\frac{1}{2}$ – 6 or 1.5000 – 6	UNC	1A	0.0024	1.4976	1.4703	...	1.3893	1.3772	0.0121	1.3172	1.2689	1.2931	...	0.0241	0.0180	...	...	...	...	
6		2A	0.0024	1.4976	1.4794	1.4703	1.3893	1.3812	0.008097	1.3172	1.2729	1.2931	...	0.0241	0.0180	1.3051	1.2869	0.0301	0.0250	
6		3A	0.0000	1.5000	1.4818	...	1.3917	1.3856	0.0061	1.3196	1.2773	1.2955	...	0.0241	0.0180	1.3075	1.2913	0.0301	0.0250	
$1\frac{1}{2}$ – 8 or 1.5000 – 8	UN	2A	0.0022	1.4978	1.4828	1.4753	1.4166	1.4093	0.007304	1.3625	1.3281	1.3444	...	0.0180	0.0135	1.3535	1.3386	0.0226	0.0188	
8		3A	0.0000	1.5000	1.4850	...	1.4188	1.4133	0.0055	1.3647	1.3321	1.3466	...	0.0180	0.0135	1.3557	1.3426	0.0226	0.0188	
$1\frac{1}{2}$ – 12 or 1.5000 – 12	UNF	1A	0.0019	1.4981	1.4809	...	1.4440	1.4344	0.0096	1.4079	1.3803	1.3959	...	0.0120	0.0090	...	...	...	...	
12		2A	0.0019	1.4981	1.4867	...	1.4440	1.4376	0.006416	1.4079	1.3835	1.3959	...	0.0120	0.0090	1.4019	1.3905	0.0150	0.0125	
12		3A	0.0000	1.5000	1.4886	...	1.4459	1.4411	0.0048	1.4098	1.3870	1.3978	...	0.0120	0.0090	1.4038	1.3940	0.0150	0.0125	
(8) $1\frac{1}{2}$ – 16 or 1.5000 – 16	UN	2A	0.0016	1.4984	1.4890	...	1.4578	1.4526	0.005204	1.4307	1.4120	1.4217	...	0.0090	0.0068	1.4262	1.4172	0.0113	0.0094	
16		3A	0.0000	1.5000	1.4906	...	1.4594	1.4555	0.0039	1.4323	1.4149	1.4233	...	0.0090	0.0068	1.4278	1.4201	0.0113	0.0094	
(8) $1\frac{1}{2}$ – 18 or 1.5000 – 18	UNEF	2A	0.0015	1.4985	1.4898	...	1.4624	1.4574	0.004962	1.4384	1.4213	1.4303	...	0.0080	0.0060	1.4343	1.4260	0.0100	0.0083	
18		3A	0.0000	1.5000	1.4913	...	1.4639	1.4602	0.0037	1.4399	1.4241	1.4318	...	0.0080	0.0060	1.4358	1.4288	0.0100	0.0083	
$1\frac{1}{2}$ – 20 or 1.5000 – 20	UN	2A	0.0014	1.4986	1.4905	...	1.4661	1.4613	0.004759	1.4445	1.4288	1.4373	...	0.0072	0.0054	1.4408	1.4330	0.0090	0.0075	
(8) 20		3A	0.0000	1.5000	1.4919	...	1.4675	1.4639	0.0036	1.4459	1.4314	1.4387	...	0.0072	0.0054	1.4422	1.4356	0.0090	0.0075	
$1\frac{1}{2}$ – 28 or 1.5000 – 28	UN	2A	0.0013	1.4987	1.4922	...	1.4755	1.4713	0.004194	1.4600	1.4481	1.4549	...	0.0052	0.0039	1.4575	1.4511	0.0064	0.0054	
28		3A	0.0000	1.5000	1.4935	...	1.4768	1.4737	0.0031	1.4613	1.4505	1.4562	...	0.0052	0.0039	1.4588	1.4535	0.0064	0.0054	
$1\frac{9}{16}$ – 6 or 1.5625 – 6	UN	2A	0.0024	1.5601	1.5419	...	1.4518	1.4436	0.008159	1.3797	1.3353	1.3556	...	0.0241	0.0180	1.3676	1.3493	0.0301	0.0250	
6		3A	0.0000	1.5625	1.5443	...	1.4542	1.4481	0.0061	1.3821	1.3398	1.3580	...	0.0241	0.0180	1.3700	1.3538	0.0301	0.0250	
$1\frac{9}{16}$ – 8 or 1.5625 – 8	UN	2A	0.0022	1.5603	1.5453	...	1.4791	1.4717	0.007366	1.4250	1.3905	1.4069	...	0.0180	0.0135	1.4160	1.4010	0.0226	0.0188	
8		3A	0.0000	1.5625	1.5475	...	1.4813	1.4758	0.0055	1.4272	1.3946	1.4091	...	0.0180	0.0135	1.4182	1.4051	0.0226	0.0188	
(8) $1\frac{9}{16}$ – 12 or 1.5625 – 12	UN	2A	0.0018	1.5607	1.5493	...	1.5066	1.5007	0.005902	1.4705	1.4466	1.4585	...	0.0120	0.0090	1.4645	1.4536	0.0150	0.0125	
(8) 12		3A	0.0000	1.5625	1.5511	...	1.5084	1.5040	0.0044	1.4723	1.4499	1.4603	...	0.0120	0.0090	1.4663	1.4569	0.0150	0.0125	
$1\frac{9}{16}$ – 16 or 1.5625 – 16	UN	2A	0.0016	1.5609	1.5515	...	1.5203	1.5151	0.005228	1.4932	1.4745	1.4842	...	0.0090	0.0068	1.4887	1.4797	0.0113	0.0094	
(8) 16		3A	0.0000	1.5625	1.5531	...	1.5219	1.5180	0.0039	1.4948	1.4774	1.4858	...	0.0090	0.0068	1.4903	1.4826	0.0113	0.0094	

Table 2A
Limits of Size for Standard Series External Threads (UN, UNR, and UNJ) (Cont'd)

							Minor Diameter, d_1 /Root Radius												
							Pitch Diameter, d_2 , and Functional Diameter [Note (4)]		UN		UNR				UNJ				
									Reference Diameter [Notes (6), (7)]	Reference Diameter [Note (6)]	Radius	Diameter	Radius						
Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Allowance, es	Max. [Note (2)]	Min.	Min. [Note (3)]	Max. [Note (2)]	Tolerance, Td_2 [Note (5)]	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
(8) $1\frac{9}{16}$ – 18 or 1.5625 – 18	UNEF	2A	0.0015	1.5610	1.5523	...	1.5249	1.5199	0.004986	1.5009	1.4838	1.4928	...	0.0080	0.0060	1.4968	1.4885	0.0100	0.0083
		3A	0.0000	1.5625	1.5538	...	1.5264	1.5227	0.0037	1.5024	1.4866	1.4943	...	0.0080	0.0060	1.4983	1.4913	0.0100	0.0083
(8) $1\frac{9}{16}$ – 20 or 1.5625 – 20	UN	2A	0.0014	1.5611	1.5530	...	1.5286	1.5238	0.004783	1.5070	1.4913	1.4998	...	0.0072	0.0054	1.5033	1.4955	0.0090	0.0075
		3A	0.0000	1.5625	1.5544	...	1.5300	1.5264	0.0036	1.5084	1.4939	1.5012	...	0.0072	0.0054	1.5047	1.4981	0.0090	0.0075
$1\frac{5}{8}$ – 6 or 1.6250 – 6	UN	2A	0.0025	1.6225	1.6043	...	1.5142	1.5060	0.008219	1.4421	1.3977	1.4180	...	0.0241	0.0180	1.4300	1.4117	0.0301	0.0250
		3A	0.0000	1.6250	1.6068	...	1.5167	1.5105	0.0062	1.4446	1.4022	1.4205	...	0.0241	0.0180	1.4325	1.4162	0.0301	0.0250
$1\frac{5}{8}$ – 8 or 1.6250 – 8	UN	2A	0.0022	1.6228	1.6078	1.6003	1.5416	1.5342	0.007426	1.4875	1.4530	1.4694	...	0.0180	0.0135	1.4785	1.4635	0.0226	0.0188
		3A	0.0000	1.6250	1.6100	...	1.5438	1.5382	0.0056	1.4897	1.4570	1.4716	...	0.0180	0.0135	1.4807	1.4675	0.0226	0.0188
(8) $1\frac{5}{8}$ – 12 or 1.6250 – 12	UN	2A	0.0018	1.6232	1.6118	...	1.5691	1.5632	0.005925	1.5330	1.5091	1.5210	...	0.0120	0.0090	1.5270	1.5161	0.0150	0.0125
		3A	0.0000	1.6250	1.6136	...	1.5709	1.5665	0.0044	1.5348	1.5124	1.5228	...	0.0120	0.0090	1.5288	1.5194	0.0150	0.0125
(8) $1\frac{5}{8}$ – 16 or 1.6250 – 16	UN	2A	0.0016	1.6234	1.6140	...	1.5828	1.5775	0.005251	1.5557	1.5369	1.5467	...	0.0090	0.0068	1.5512	1.5421	0.0113	0.0094
		3A	0.0000	1.6250	1.6156	...	1.5844	1.5805	0.0039	1.5573	1.5399	1.5483	...	0.0090	0.0068	1.5528	1.5451	0.0113	0.0094
(8) $1\frac{5}{8}$ – 18 or 1.6250 – 18	UNEF	2A	0.0015	1.6235	1.6148	...	1.5874	1.5824	0.005009	1.5634	1.5463	1.5553	...	0.0080	0.0060	1.5593	1.5510	0.0100	0.0083
		3A	0.0000	1.6250	1.6163	...	1.5889	1.5851	0.0038	1.5649	1.5490	1.5568	...	0.0080	0.0060	1.5608	1.5537	0.0100	0.0083
(8) $1\frac{5}{8}$ – 20 or 1.6250 – 20	UN	2A	0.0014	1.6236	1.6155	...	1.5911	1.5863	0.004806	1.5695	1.5538	1.5623	...	0.0072	0.0054	1.5658	1.5580	0.0090	0.0075
		3A	0.0000	1.6250	1.6169	...	1.5925	1.5889	0.0036	1.5709	1.5564	1.5637	...	0.0072	0.0054	1.5672	1.5606	0.0090	0.0075
$1\frac{11}{16}$ – 6 or 1.6875 – 6	UN	2A	0.0025	1.6850	1.6668	...	1.5767	1.5684	0.008278	1.5046	1.4601	1.4805	...	0.0241	0.0180	1.4925	1.4741	0.0301	0.0250
		3A	0.0000	1.6875	1.6693	...	1.5792	1.5730	0.0062	1.5071	1.4647	1.4830	...	0.0241	0.0180	1.4950	1.4787	0.0301	0.0250
$1\frac{11}{16}$ – 8 or 1.6875 – 8	UN	2A	0.0022	1.6853	1.6703	...	1.6041	1.5966	0.007485	1.5500	1.5154	1.5319	...	0.0180	0.0135	1.5410	1.5259	0.0226	0.0188
		3A	0.0000	1.6875	1.6725	...	1.6063	1.6007	0.0056	1.5522	1.5195	1.5341	...	0.0180	0.0135	1.5432	1.5300	0.0226	0.0188
(8) $1\frac{11}{16}$ – 12 or 1.6875 – 12	UN	2A	0.0018	1.6857	1.6743	...	1.6316	1.6257	0.005947	1.5955	1.5716	1.5835	...	0.0120	0.0090	1.5895	1.5786	0.0150	0.0125
		3A	0.0000	1.6875	1.6761	...	1.6334	1.6289	0.0045	1.5973	1.5748	1.5853	...	0.0120	0.0090	1.5913	1.5818	0.0150	0.0125
(8) $1\frac{11}{16}$ – 16 or 1.6875 – 16	UN	2A	0.0016	1.6859	1.6765	...	1.6453	1.6400	0.005273	1.6182	1.5994	1.6092	...	0.0090	0.0068	1.6137	1.6046	0.0113	0.0094
		3A	0.0000	1.6875	1.6781	...	1.6469	1.6429	0.0040	1.6198	1.6023	1.6108	...	0.0090	0.0068	1.6153	1.6075	0.0113	0.0094
(8) $1\frac{11}{16}$ – 18 or 1.6875 – 18	UNEF	2A	0.0015	1.6860	1.6773	...	1.6499	1.6449	0.005031	1.6259	1.6088	1.6178	...	0.0080	0.0060	1.6218	1.6135	0.0100	0.0083
		3A	0.0000	1.6875	1.6788	...	1.6514	1.6476	0.0038	1.6274	1.6115	1.6193	...	0.0080	0.0060	1.6233	1.6162	0.0100	0.0083

Table 2A
Limits of Size for Standard Series External Threads (UN, UNR, and UNJ) (Cont'd)

	Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Allowance, <i>es</i>	Major Diameter, <i>d</i>			Pitch Diameter, <i>d</i> ₂ , and Functional Diameter [Note (4)]			Minor Diameter, <i>d</i> ₁ /Root Radius									
											UN		UNR				UNJ			
											Reference Diameter [Notes (6), (7)]		Reference Diameter [Note (6)]		Radius		Diameter		Radius	
											Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.
	1	2	3	4	Max. [Note (2)]	Min.	Min. [Note (3)]	Max. [Note (2)]	Min.	Tolerance, <i>Td</i> ₂ [Note (5)]	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.
(8)	1 ¹¹ / ₁₆ – 20 or 1.6875 – 20	UN	2A	0.0014	1.6861	1.6780	...	1.6536	1.6488	0.004828	1.6320	1.6163	1.6248	...	0.0072	0.0054	1.6283	1.6205	0.0090	0.0075
(8)	20		3A	0.0000	1.6875	1.6794	...	1.6550	1.6514	0.0036	1.6334	1.6189	1.6262	...	0.0072	0.0054	1.6297	1.6231	0.0090	0.0075
(8)	3 ¹ / ₄ – 5 or 1.7500 – 5	UNC	1A	0.0027	1.7473	1.7165	...	1.6174	1.6040	0.0134	1.5308	1.4741	1.5019	...	0.0289	0.0217	...	...	...	...
(8)	5		2A	0.0027	1.7473	1.7268	1.7165	1.6174	1.6085	0.008922	1.5308	1.4786	1.5019	...	0.0289	0.0217	1.5164	1.4953	0.0361	0.0300
(8)	5		3A	0.0000	1.7500	1.7295	...	1.6201	1.6134	0.0067	1.5335	1.4835	1.5046	...	0.0289	0.0217	1.5191	1.5002	0.0361	0.0300
	3 ¹ / ₄ – 6 or 1.7500 – 6	UN	2A	0.0025	1.7475	1.7293	...	1.6392	1.6309	0.008335	1.5671	1.5226	1.5430	...	0.0241	0.0180	1.5550	1.5366	0.0301	0.0250
	6		3A	0.0000	1.7500	1.7318	...	1.6417	1.6354	0.0063	1.5696	1.5271	1.5455	...	0.0241	0.0180	1.5575	1.5411	0.0301	0.0250
	3 ¹ / ₄ – 8 or 1.7500 – 8	UN	2A	0.0023	1.7477	1.7327	1.7252	1.6665	1.6590	0.007542	1.6124	1.5778	1.5943	...	0.0180	0.0135	1.6034	1.5883	0.0226	0.0188
(8)	8		3A	0.0000	1.7500	1.7350	...	1.6688	1.6631	0.0057	1.6147	1.5819	1.5966	...	0.0180	0.0135	1.6057	1.5924	0.0226	0.0188
	3 ¹ / ₄ – 12 or 1.7500 – 12	UN	2A	0.0018	1.7482	1.7368	...	1.6941	1.6881	0.005969	1.6580	1.6340	1.6460	...	0.0120	0.0090	1.6520	1.6410	0.0150	0.0125
	12		3A	0.0000	1.7500	1.7386	...	1.6959	1.6914	0.0045	1.6598	1.6373	1.6478	...	0.0120	0.0090	1.6538	1.6443	0.0150	0.0125
	3 ¹ / ₄ – 16 or 1.7500 – 16	UN	2A	0.0016	1.7484	1.7390	...	1.7078	1.7025	0.005295	1.6807	1.6619	1.6717	...	0.0090	0.0068	1.6762	1.6671	0.0113	0.0094
(8)	16		3A	0.0000	1.7500	1.7406	...	1.7094	1.7054	0.00400	1.6823	1.6648	1.6733	...	0.0090	0.0068	1.6778	1.6700	0.0113	0.0094
	3 ¹ / ₄ – 20 or 1.7500 – 20	UN	2A	0.0015	1.7485	1.7404	...	1.7160	1.7111	0.004850	1.6944	1.6787	1.6872	...	0.0072	0.0054	1.6907	1.6829	0.0090	0.0075
(8)	20		3A	0.0000	1.7500	1.7419	...	1.7175	1.7139	0.0036	1.6959	1.6814	1.6887	...	0.0072	0.0054	1.6922	1.6856	0.0090	0.0075
	1 ¹³ / ₁₆ – 6 or 1.8125 – 6	UN	2A	0.0025	1.8100	1.7918	...	1.7017	1.6933	0.008391	1.6296	1.5850	1.6055	...	0.0241	0.0180	1.6175	1.5990	0.0301	0.0250
	6		3A	0.0000	1.8125	1.7943	...	1.7042	1.6979	0.0063	1.6321	1.5896	1.6080	...	0.0241	0.0180	1.6200	1.6036	0.0301	0.0250
	1 ¹³ / ₁₆ – 8 or 1.8125 – 8	UN	2A	0.0023	1.8102	1.7952	...	1.7290	1.7214	0.007598	1.6749	1.6402	1.6568	...	0.0180	0.0135	1.6659	1.6507	0.0226	0.0188
	8		3A	0.0000	1.8125	1.7975	...	1.7313	1.7256	0.0057	1.6772	1.6444	1.6591	...	0.0180	0.0135	1.6682	1.6549	0.0226	0.0188
	1 ¹³ / ₁₆ – 12 or 1.8125 – 12	UN	2A	0.0018	1.8107	1.7993	...	1.7566	1.7506	0.005990	1.7205	1.6965	1.7085	...	0.0120	0.0090	1.7145	1.7035	0.0150	0.0125
	12		3A	0.0000	1.8125	1.8011	...	1.7584	1.7539	0.0045	1.7223	1.6998	1.7103	...	0.0120	0.0090	1.7163	1.7068	0.0150	0.0125
	1 ¹³ / ₁₆ – 16 or 1.8125 – 16	UN	2A	0.0016	1.8109	1.8015	...	1.7703	1.7650	0.005316	1.7432	1.7244	1.7342	...	0.0090	0.0068	1.7387	1.7296	0.0113	0.0094
(8)	16		3A	0.0000	1.8125	1.8031	...	1.7719	1.7679	0.0040	1.7448	1.7273	1.7358	...	0.0090	0.0068	1.7403	1.7325	0.0113	0.0094
	1 ¹³ / ₁₆ – 20 or 1.8125 – 20	UN	2A	0.0015	1.8110	1.8029	...	1.7785	1.7736	0.004871	1.7569	1.7411	1.7497	...	0.0072	0.0054	1.7532	1.7453	0.0090	0.0075
(8)	20		3A	0.0000	1.8125	1.8044	...	1.7800	1.7763	0.0037	1.7584	1.7438	1.7512	...	0.0072	0.0054	1.7547	1.7480	0.0090	0.0075
	1 ⁷ / ₈ – 6 or 1.8750 – 6	UN	2A	0.0025	1.8725	1.8543	...	1.7642	1.7558	0.008447	1.6921	1.6475	1.6680	...	0.0241	0.0180	1.6800	1.6615	0.0301	0.0250
	6		3A	0.0000	1.8750	1.8568	...	1.7667	1.7604	0.0063	1.6946	1.6521	1.6705	...	0.0241	0.0180	1.6825	1.6661	0.0301	0.0250

Table 2A
Limits of Size for Standard Series External Threads (UN, UNR, and UNJ) (Cont'd)

							Minor Diameter, d_1 /Root Radius												
							Pitch Diameter, d_2 , and Functional Diameter [Note (4)]		UN		UNR				UNJ				
									Reference Diameter [Notes (6), (7)]	Tolerance, T_{d_2} [Note (5)]	Reference Diameter [Note (6)]	Radius		Diameter		Radius			
												Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.
Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Allowance, es	Max. [Note (2)]	Min.	Min. [Note (3)]	Max. [Note (2)]	Min.	10	11	12	13	14	15	16	17	18	19	20
1 $\frac{7}{8}$ – 8 or 1.8750 – 8	UN	2A	0.0023	1.8727	1.8577	1.8502	1.7915	1.7838	0.007654	1.7374	1.7026	1.7193	...	0.0180	0.0135	1.7284	1.7131	0.0226	0.0188
8		3A	0.0000	1.8750	1.8600	...	1.7938	1.7881	0.0057	1.7397	1.7069	1.7216	...	0.0180	0.0135	1.7307	1.7174	0.0226	0.0188
1 $\frac{7}{8}$ – 12 or 1.8750 – 12	UN	2A	0.0018	1.8732	1.8618	...	1.8191	1.8131	0.006011	1.7830	1.7590	1.7710	...	0.0120	0.0090	1.7770	1.7660	0.0150	0.0125
(8) 12		3A	0.0000	1.8750	1.8636	...	1.8209	1.8164	0.0045	1.7848	1.7623	1.7728	...	0.0120	0.0090	1.7788	1.7693	0.0150	0.0125
1 $\frac{7}{8}$ – 16 or 1.8750 – 16	UN	2A	0.0016	1.8734	1.8640	...	1.8328	1.8275	0.005337	1.8057	1.7869	1.7967	...	0.0090	0.0068	1.8012	1.7921	0.0113	0.0094
(8) 16		3A	0.0000	1.8750	1.8656	...	1.8344	1.8304	0.0040	1.8073	1.7898	1.7983	...	0.0090	0.0068	1.8028	1.7950	0.0113	0.0094
1 $\frac{7}{8}$ – 20 or 1.8750 – 20	UN	2A	0.0015	1.8735	1.8654	...	1.8410	1.8361	0.004892	1.8194	1.8036	1.8122	...	0.0072	0.0054	1.8157	1.8078	0.0090	0.0075
(8) 20		3A	0.0000	1.8750	1.8669	...	1.8425	1.8388	0.0037	1.8209	1.8063	1.8137	...	0.0072	0.0054	1.8172	1.8105	0.0090	0.0075
1 $\frac{15}{16}$ – 6 or 1.9375 – 6	UN	2A	0.0026	1.9349	1.9167	...	1.8266	1.8181	0.008501	1.7545	1.7098	1.7304	...	0.0241	0.0180	1.7424	1.7238	0.0301	0.0250
6		3A	0.0000	1.9375	1.9193	...	1.8292	1.8228	0.0064	1.7571	1.7145	1.7330	...	0.0241	0.0180	1.7450	1.7285	0.0301	0.0250
1 $\frac{15}{16}$ – 8 or 1.9375 – 8	UN	2A	0.0023	1.9352	1.9202	...	1.8540	1.8463	0.007708	1.7999	1.7651	1.7818	...	0.0180	0.0135	1.7909	1.7756	0.0226	0.0188
8		3A	0.0000	1.9375	1.9225	...	1.8563	1.8505	0.0058	1.8022	1.7693	1.7841	...	0.0180	0.0135	1.7932	1.7798	0.0226	0.0188
1 $\frac{15}{16}$ – 12 or 1.9375 – 12	UN	2A	0.0018	1.9357	1.9243	...	1.8816	1.8756	0.006031	1.8455	1.8215	1.8335	...	0.0120	0.0090	1.8395	1.8285	0.0150	0.0125
(8) 12		3A	0.0000	1.9375	1.9261	...	1.8834	1.8789	0.0045	1.8473	1.8248	1.8353	...	0.0120	0.0090	1.8413	1.8318	0.0150	0.0125
1 $\frac{15}{16}$ – 16 or 1.9375 – 16	UN	2A	0.0016	1.9359	1.9265	...	1.8953	1.8899	0.005357	1.8682	1.8493	1.8592	...	0.0090	0.0068	1.8637	1.8545	0.0113	0.0094
(8) 16		3A	0.0000	1.9375	1.9281	...	1.8969	1.8929	0.0040	1.8698	1.8523	1.8608	...	0.0090	0.0068	1.8653	1.8575	0.0113	0.0094
1 $\frac{15}{16}$ – 20 or 1.9375 – 20	UN	2A	0.0015	1.9360	1.9279	...	1.9035	1.8986	0.004912	1.8819	1.8661	1.8747	...	0.0072	0.0054	1.8782	1.8703	0.0090	0.0075
(8) 20		3A	0.0000	1.9375	1.9294	...	1.9050	1.9013	0.0037	1.8834	1.8688	1.8762	...	0.0072	0.0054	1.8797	1.8730	0.0090	0.0075
2 – 4.5 or 2.0000 – 4.5	UNC	1A	0.0029	1.9971	1.9641	...	1.8528	1.8385	0.0143	1.7565	1.6942	1.7245	...	0.0321	0.0241	...	...	...	...
4.5		2A	0.0029	1.9971	1.9751	1.9641	1.8528	1.8433	0.009514	1.7565	1.6990	1.7245	...	0.0321	0.0241	1.7405	1.7176	0.0401	0.0334
4.5		3A	0.0000	2.0000	1.9780	...	1.8557	1.8486	0.0071	1.7594	1.7043	1.7274	...	0.0321	0.0241	1.7434	1.7229	0.0401	0.0334
2 – 6 or 2.0000 – 6	UN	2A	0.0026	1.9974	1.9792	...	1.8891	1.8805	0.008554	1.8170	1.7722	1.7929	...	0.0241	0.0180	1.8049	1.7862	0.0301	0.0250
6		3A	0.0000	2.0000	1.9818	...	1.8917	1.8853	0.0064	1.8196	1.7770	1.7955	...	0.0241	0.0180	1.8075	1.7910	0.0301	0.0250
2 – 8 or 2.0000 – 8	UN	2A	0.0023	1.9977	1.9827	1.9752	1.9165	1.9087	0.007761	1.8624	1.8275	1.8443	...	0.0180	0.0135	1.8534	1.8380	0.0226	0.0188
8		3A	0.0000	2.0000	1.9850	...	1.9188	1.9130	0.0058	1.8647	1.8318	1.8466	...	0.0180	0.0135	1.8557	1.8423	0.0226	0.0188
2 – 12 or 2.0000 – 12	UN	2A	0.0018	1.9982	1.9868	...	1.9441	1.9380	0.006051	1.9080	1.8839	1.8960	...	0.0120	0.0090	1.9020	1.8909	0.0150	0.0125
12		3A	0.0000	2.0000	1.9886	...	1.9459	1.9414	0.0045	1.9098	1.8873	1.8978	...	0.0120	0.0090	1.9038	1.8943	0.0150	0.0125

Table 2A
Limits of Size for Standard Series External Threads (UN, UNR, and UNJ) (Cont'd)

Nominal Size and Threads/in.	Series Designa- tion	Class [Note (1)]	Allowance, <i>es</i>	Major Diameter, <i>d</i>			Pitch Diameter, <i>d</i> ₂ , and Functional Diameter [Note (4)]			Minor Diameter, <i>d</i> ₁ /Root Radius									
										UN		UNR				UNJ			
										Reference Diameter [Notes (6), (7)]		Reference Diameter [Note (6)]		Radius		Diameter		Radius	
										Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.
1	2	3	4	Max. [Note (2)]	Min.	Min. [Note (3)]	Max. [Note (2)]	Min.	Tolerance, <i>Td</i> ₂ [Note (5)]	11	12	13	14	15	16	17	18	19	20
(8) 2 – 16 or 2.0000 – 16	UN	2A	0.0016	1.9984	1.9890	...	1.9578	1.9524	0.005377	1.9307	1.9118	1.9217	...	0.0090	0.0068	1.9262	1.9170	0.0113	0.0094
		3A	0.0000	2.0000	1.9906	...	1.9594	1.9554	0.0040	1.9323	1.9148	1.9233	...	0.0090	0.0068	1.9278	1.9200	0.0113	0.0094
(8) 2 – 20 or 2.0000 – 20	UN	2A	0.0015	1.9985	1.9904	...	1.9660	1.9611	0.004932	1.9444	1.9286	1.9372	...	0.0072	0.0054	1.9407	1.9328	0.0090	0.0075
		3A	0.0000	2.0000	1.9919	...	1.9675	1.9638	0.0037	1.9459	1.9313	1.9387	...	0.0072	0.0054	1.9422	1.9355	0.0090	0.0075
2 ¹ / ₈ – 6 or 2.1250 – 6	UN	2A	0.0026	2.1224	2.1042	...	2.0141	2.0054	0.008658	1.9420	1.8971	1.9179	...	0.0241	0.0180	1.9299	1.9111	0.0301	0.0250
		3A	0.0000	2.1250	2.1068	...	2.0167	2.0102	0.0065	1.9446	1.9019	1.9205	...	0.0241	0.0180	1.9325	1.9159	0.0301	0.0250
2 ¹ / ₈ – 8 or 2.1250 – 8	UN	2A	0.0024	2.1226	2.1076	2.1001	2.0414	2.0335	0.007865	1.9873	1.9523	1.9692	...	0.0180	0.0135	1.9783	1.9628	0.0226	0.0188
		3A	0.0000	2.1250	2.1100	...	2.0438	2.0379	0.0059	1.9897	1.9567	1.9716	...	0.0180	0.0135	1.9807	1.9672	0.0226	0.0188
(8) 2 ¹ / ₈ – 12 or 2.1250 – 12	UN	2A	0.0018	2.1232	2.1118	...	2.0691	2.0630	0.006089	2.0330	2.0089	2.0210	...	0.0120	0.0090	2.0270	2.0159	0.0150	0.0125
		3A	0.0000	2.1250	2.1136	...	2.0709	2.0663	0.0046	2.0348	2.0122	2.0228	...	0.0120	0.0090	2.0288	2.0192	0.0150	0.0125
(8) 2 ¹ / ₈ – 16 or 2.1250 – 16	UN	2A	0.0016	2.1234	2.1140	...	2.0828	2.0774	0.005415	2.0557	2.0368	2.0467	...	0.0090	0.0068	2.0512	2.0420	0.0113	0.0094
		3A	0.0000	2.1250	2.1156	...	2.0844	2.0803	0.0041	2.0573	2.0397	2.0483	...	0.0090	0.0068	2.0528	2.0449	0.0113	0.0094
(8) 2 ¹ / ₈ – 20 or 2.1250 – 20	UN	2A	0.0015	2.1235	2.1154	...	2.0910	2.0860	0.004970	2.0694	2.0535	2.0622	...	0.0072	0.0054	2.0657	2.0577	0.0090	0.0075
		3A	0.0000	2.1250	2.1169	...	2.0925	2.0888	0.0037	2.0709	2.0563	2.0637	...	0.0072	0.0054	2.0672	2.0605	0.0090	0.0075
2 ¹ / ₄ – 4.5 or 2.2500 – 4.5	UNC	1A	0.0029	2.2471	2.2141	...	2.1028	2.0882	0.0146	2.0065	1.9439	1.9745	...	0.0321	0.0241	...	...	...	...
		2A	0.0029	2.2471	2.2251	2.2141	2.1028	2.0931	0.009719	2.0065	1.9488	1.9745	...	0.0321	0.0241	1.9905	1.9674	0.0401	0.0334
		3A	0.0000	2.2500	2.2280	...	2.1057	2.0984	0.0073	2.0094	1.9541	1.9774	...	0.0321	0.0241	1.9934	1.9727	0.0401	0.0334
2 ¹ / ₄ – 6 or 2.2500 – 6	UN	2A	0.0026	2.2474	2.2292	...	2.1391	2.1303	0.008759	2.0670	2.0220	2.0429	...	0.0241	0.0180	2.0549	2.0360	0.0301	0.0250
		3A	0.0000	2.2500	2.2318	...	2.1417	2.1351	0.0066	2.0696	2.0268	2.0455	...	0.0241	0.0180	2.0575	2.0408	0.0301	0.0250
2 ¹ / ₄ – 8 or 2.2500 – 8	UN	2A	0.0024	2.2476	2.2326	2.2251	2.1664	2.1584	0.007966	2.1123	2.0772	2.0942	...	0.0180	0.0135	2.1033	2.0877	0.0226	0.0188
		3A	0.0000	2.2500	2.2350	...	2.1688	2.1628	0.0060	2.1147	2.0816	2.0966	...	0.0180	0.0135	2.1057	2.0921	0.0226	0.0188
(8) 2 ¹ / ₄ – 12 or 2.2500 – 12	UN	2A	0.0018	2.2482	2.2368	...	2.1941	2.1880	0.006127	2.1580	2.1339	2.1460	...	0.0120	0.0090	2.1520	2.1409	0.0150	0.0125
		3A	0.0000	2.2500	2.2386	...	2.1959	2.1913	0.0046	2.1598	2.1372	2.1478	...	0.0120	0.0090	2.1538	2.1442	0.0150	0.0125
(8) 2 ¹ / ₄ – 16 or 2.2500 – 16	UN	2A	0.0016	2.2484	2.2390	...	2.2078	2.2023	0.005453	2.1807	2.1617	2.1717	...	0.0090	0.0068	2.1762	2.1669	0.0113	0.0094
		3A	0.0000	2.2500	2.2406	...	2.2094	2.2053	0.0041	2.1823	2.1647	2.1733	...	0.0090	0.0068	2.1778	2.1699	0.0113	0.0094
(8) 2 ¹ / ₄ – 20 or 2.2500 – 20	UN	2A	0.0015	2.2485	2.2404	...	2.2160	2.2110	0.005008	2.1944	2.1785	2.1872	...	0.0072	0.0054	2.1907	2.1827	0.0090	0.0075
		3A	0.0000	2.2500	2.2419	...	2.2175	2.2137	0.0038	2.1959	2.1812	2.1887	...	0.0072	0.0054	2.1922	2.1854	0.0090	0.0075

Table 2A
Limits of Size for Standard Series External Threads (UN, UNR, and UNJ) (Cont'd)

							Minor Diameter, d_1 /Root Radius													
							Pitch Diameter, d_2 , and Functional Diameter [Note (4)]		UN		UNR				UNJ					
									Reference Diameter [Notes (6), (7)]		Reference Diameter [Note (6)]		Radius		Diameter		Radius			
Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Allowance, es	Major Diameter, d		Max. [Note (2)]	Min. [Note (3)]	Max. [Note (2)]	Min.	Tolerance, T_{d_2} [Note (5)]	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.
				Max. [Note (2)]	Min.															
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
(8)	2 $\frac{3}{8}$ – 6 or 2.3750 – 6	UN	2A	0.0027	2.3723	2.3541	...	2.2640	2.2551	0.008856	2.1919	2.1468	2.1678	...	0.0241	0.0180	2.1798	2.1608	0.0301	0.0250
	6		3A	0.0000	2.3750	2.3568	...	2.2667	2.2601	0.0066	2.1946	2.1518	2.1705	...	0.0241	0.0180	2.1825	2.1658	0.0301	0.0250
	2 $\frac{3}{8}$ – 8 or 2.3750 – 8	UN	2A	0.0024	2.3726	2.3576	...	2.2914	2.2833	0.008063	2.2373	2.2021	2.2192	...	0.0180	0.0135	2.2283	2.2126	0.0226	0.0188
	8		3A	0.0000	2.3750	2.3600	...	2.2938	2.2878	0.0060	2.2397	2.2066	2.2216	...	0.0180	0.0135	2.2307	2.2171	0.0226	0.0188
(8)	2 $\frac{3}{8}$ – 12 or 2.3750 – 12	UN	2A	0.0018	2.3732	2.3618	...	2.3191	2.3129	0.006162	2.2830	2.2588	2.2710	...	0.0120	0.0090	2.2770	2.2658	0.0150	0.0125
	12		3A	0.0000	2.3750	2.3636	...	2.3209	2.3163	0.0046	2.2848	2.2622	2.2728	...	0.0120	0.0090	2.2788	2.2692	0.0150	0.0125
(8)	2 $\frac{3}{8}$ – 16 or 2.3750 – 16	UN	2A	0.0016	2.3734	2.3640	...	2.3328	2.3273	0.005488	2.3057	2.2867	2.2967	...	0.0090	0.0068	2.3012	2.2919	0.0113	0.0094
(8)	16		3A	0.0000	2.3750	2.3656	...	2.3344	2.3303	0.0041	2.3073	2.2897	2.2983	...	0.0090	0.0068	2.3028	2.2949	0.0113	0.0094
(8)	2 $\frac{3}{8}$ – 20 or 2.3750 – 20	UN	2A	0.0015	2.3735	2.3654	...	2.3410	2.3360	0.005043	2.3194	2.3035	2.3122	...	0.0072	0.0054	2.3157	2.3077	0.0090	0.0075
(8)	20		3A	0.0000	2.3750	2.3669	...	2.3425	2.3387	0.0038	2.3209	2.3062	2.3137	...	0.0072	0.0054	2.3172	2.3104	0.0090	0.0075
	2 $\frac{1}{2}$ – 4 or 2.5000 – 4	UNC	1A	0.0031	2.4969	2.4612	...	2.3345	2.3190	0.0155	2.2263	2.1566	2.1902	...	0.0361	0.0271	...	...	...	...
	4		2A	0.0031	2.4969	2.4731	2.4612	2.3345	2.3241	0.010361	2.2263	2.1617	2.1902	...	0.0361	0.0271	2.2082	2.1827	0.0451	0.0375
	4		3A	0.0000	2.5000	2.4762	...	2.3376	2.3298	0.0078	2.2294	2.1674	2.1933	...	0.0361	0.0271	2.2113	2.1884	0.0451	0.0375
	2 $\frac{1}{2}$ – 6 or 2.5000 – 6	UN	2A	0.0027	2.4973	2.4791	...	2.3890	2.3800	0.008951	2.3169	2.2717	2.2928	...	0.0241	0.0180	2.3048	2.2857	0.0301	0.0250
	6		3A	0.0000	2.5000	2.4818	...	2.3917	2.3850	0.0067	2.3196	2.2767	2.2955	...	0.0241	0.0180	2.3075	2.2907	0.0301	0.0250
	2 $\frac{1}{2}$ – 8 or 2.5000 – 8	UN	2A	0.0024	2.4976	2.4826	2.4751	2.4164	2.4082	0.008158	2.3623	2.3270	2.3442	...	0.0180	0.0135	2.3533	2.3375	0.0226	0.0188
	8		3A	0.0000	2.5000	2.4850	...	2.4188	2.4127	0.0061	2.3647	2.3315	2.3466	...	0.0180	0.0135	2.3557	2.3420	0.0226	0.0188
	2 $\frac{1}{2}$ – 12 or 2.5000 – 12	UN	2A	0.0019	2.4981	2.4867	...	2.4440	2.4378	0.006197	2.4079	2.3837	2.3959	...	0.0120	0.0090	2.4019	2.3907	0.0150	0.0125
	12		3A	0.0000	2.5000	2.4886	...	2.4459	2.4413	0.0046	2.4098	2.3872	2.3978	...	0.0120	0.0090	2.4038	2.3942	0.0150	0.0125
(8)	2 $\frac{1}{2}$ – 16 or 2.5000 – 16	UN	2A	0.0017	2.4983	2.4889	...	2.4577	2.4522	0.005523	2.4306	2.4116	2.4216	...	0.0090	0.0068	2.4261	2.4168	0.0113	0.0094
	16		3A	0.0000	2.5000	2.4906	...	2.4594	2.4553	0.0041	2.4323	2.4147	2.4233	...	0.0090	0.0068	2.4278	2.4199	0.0113	0.0094
(8)	2 $\frac{1}{2}$ – 20 or 2.5000 – 20	UN	2A	0.0015	2.4985	2.4904	...	2.4660	2.4609	0.005078	2.4444	2.4284	2.4372	...	0.0072	0.0054	2.4407	2.4326	0.0090	0.0075
	20		3A	0.0000	2.5000	2.4919	...	2.4675	2.4637	0.0038	2.4459	2.4312	2.4387	...	0.0072	0.0054	2.4422	2.4354	0.0090	0.0075
	2 $\frac{5}{8}$ – 4 or 2.6250 – 4	UN	2A	0.0031	2.6219	2.5981	...	2.4595	2.4490	0.010452	2.3513	2.2866	2.3152	...	0.0361	0.0271	2.3332	2.3076	0.0451	0.0375
	4		3A	0.0000	2.6250	2.6012	...	2.4626	2.4548	0.0078	2.3544	2.2924	2.3183	...	0.0361	0.0271	2.3363	2.3134	0.0451	0.0375
	2 $\frac{5}{8}$ – 6 or 2.6250 – 6	UN	2A	0.0027	2.6223	2.6041	...	2.5140	2.5050	0.009042	2.4419	2.3967	2.4178	...	0.0241	0.0180	2.4298	2.4107	0.0301	0.0250
	6		3A	0.0000	2.6250	2.6068	...	2.5167	2.5099	0.0068	2.4446	2.4016	2.4205	...	0.0241	0.0180	2.4325	2.4156	0.0301	0.0250

Table 2A
Limits of Size for Standard Series External Threads (UN, UNR, and UNJ) (Cont'd)

Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Allowance, es	Major Diameter, <i>d</i>			Pitch Diameter, <i>d</i> ₂ , and Functional Diameter [Note (4)]			Minor Diameter, <i>d</i> ₁ /Root Radius									
										UN		UNR				UNJ			
										Reference Diameter [Notes (6), (7)]		Reference Diameter [Note (6)]		Radius		Diameter		Radius	
										Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
2 ⁵ / ₈ – 8 or 2.6250 – 8	UN	2A	0.0025	2.6225	2.6075	...	2.5413	2.5331	0.008249	2.4872	2.4519	2.4691	...	0.0180	0.0135	2.4782	2.4624	0.0226	0.0188
		3A	0.0000	2.6250	2.6100	...	2.5438	2.5376	0.0062	2.4897	2.4564	2.4716	...	0.0180	0.0135	2.4807	2.4669	0.0226	0.0188
(8) 2 ⁵ / ₈ – 12 or 2.6250 – 12	UN	2A	0.0019	2.6231	2.6117	...	2.5690	2.5628	0.006230	2.5329	2.5087	2.5209	...	0.0120	0.0090	2.5269	2.5157	0.0150	0.0125
		3A	0.0000	2.6250	2.6136	...	2.5709	2.5662	0.0047	2.5348	2.5121	2.5228	...	0.0120	0.0090	2.5288	2.5191	0.0150	0.0125
(8) 2 ⁵ / ₈ – 16 or 2.6250 – 16	UN	2A	0.0017	2.6233	2.6139	...	2.5827	2.5771	0.005556	2.5556	2.5365	2.5466	...	0.0090	0.0068	2.5511	2.5417	0.0113	0.0094
		3A	0.0000	2.6250	2.6156	...	2.5844	2.5802	0.0042	2.5573	2.5396	2.5483	...	0.0090	0.0068	2.5528	2.5448	0.0113	0.0094
(8) 2 ⁵ / ₈ – 20 or 2.6250 – 20	UN	2A	0.0015	2.6235	2.6154	...	2.5910	2.5859	0.005111	2.5694	2.5534	2.5622	...	0.0072	0.0054	2.5657	2.5576	0.0090	0.0075
		3A	0.0000	2.6250	2.6169	...	2.5925	2.5887	0.0038	2.5709	2.5562	2.5637	...	0.0072	0.0054	2.5672	2.5604	0.0090	0.0075
2 ³ / ₄ – 4 or 2.7500 – 4	UNC	1A	0.0032	2.7468	2.7111	...	2.5844	2.5686	0.0158	2.4762	2.4062	2.4401	...	0.0361	0.0271	...	...	...	...
		2A	0.0032	2.7468	2.7230	2.7111	2.5844	2.5739	0.010542	2.4762	2.4115	2.4401	...	0.0361	0.0271	2.4581	2.4325	0.0451	0.0375
		3A	0.0000	2.7500	2.7262	...	2.5876	2.5797	0.0079	2.4794	2.4173	2.4433	...	0.0361	0.0271	2.4613	2.4383	0.0451	0.0375
2 ³ / ₄ – 6 or 2.7500 – 6	UN	2A	0.0027	2.7473	2.7291	...	2.6390	2.6299	0.009132	2.5669	2.5216	2.5428	...	0.0241	0.0180	2.5548	2.5356	0.0301	0.0250
		3A	0.0000	2.7500	2.7318	...	2.6417	2.6349	0.0068	2.5696	2.5266	2.5455	...	0.0241	0.0180	2.5575	2.5406	0.0301	0.0250
2 ³ / ₄ – 8 or 2.7500 – 8	UN	2A	0.0025	2.7475	2.7325	2.7250	2.6663	2.6580	0.008339	2.6122	2.5768	2.5941	...	0.0180	0.0135	2.6032	2.5873	0.0226	0.0188
		3A	0.0000	2.7500	2.7350	...	2.6688	2.6625	0.0063	2.6147	2.5813	2.5966	...	0.0180	0.0135	2.6057	2.5918	0.0226	0.0188
(8) 2 ³ / ₄ – 12 or 2.7500 – 12	UN	2A	0.0019	2.7481	2.7367	...	2.6940	2.6877	0.006263	2.6579	2.6336	2.6459	...	0.0120	0.0090	2.6519	2.6406	0.0150	0.0125
		3A	0.0000	2.7500	2.7386	...	2.6959	2.6912	0.0047	2.6598	2.6371	2.6478	...	0.0120	0.0090	2.6538	2.6441	0.0150	0.0125
(8) 2 ³ / ₄ – 16 or 2.7500 – 16	UN	2A	0.0017	2.7483	2.7389	...	2.7077	2.7021	0.005589	2.6806	2.6615	2.6716	...	0.0090	0.0068	2.6761	2.6667	0.0113	0.0094
		3A	0.0000	2.7500	2.7406	...	2.7094	2.7052	0.0042	2.6823	2.6646	2.6733	...	0.0090	0.0068	2.6778	2.6698	0.0113	0.0094
(8) 2 ³ / ₄ – 20 or 2.7500 – 20	UN	2A	0.0015	2.7485	2.7404	...	2.7160	2.7109	0.005144	2.6944	2.6784	2.6872	...	0.0072	0.0054	2.6907	2.6826	0.0090	0.0075
		3A	0.0000	2.7500	2.7419	...	2.7175	2.7136	0.0039	2.6959	2.6811	2.6887	...	0.0072	0.0054	2.6922	2.6853	0.0090	0.0075
2 ⁷ / ₈ – 4 or 2.8750 – 4	UN	2A	0.0032	2.8718	2.8480	...	2.7094	2.6988	0.010629	2.6012	2.5364	2.5651	...	0.0361	0.0271	2.5831	2.5574	0.0451	0.0375
		3A	0.0000	2.8750	2.8512	...	2.7126	2.7046	0.0080	2.6044	2.5422	2.5683	...	0.0361	0.0271	2.5863	2.5632	0.0451	0.0375
2 ⁷ / ₈ – 6 or 2.8750 – 6	UN	2A	0.0028	2.8722	2.8540	...	2.7639	2.7547	0.009219	2.6918	2.6464	2.6677	...	0.0241	0.0180	2.6797	2.6604	0.0301	0.0250
		3A	0.0000	2.8750	2.8568	...	2.7667	2.7598	0.0069	2.6946	2.6515	2.6705	...	0.0241	0.0180	2.6825	2.6655	0.0301	0.0250
2 ⁷ / ₈ – 8 or 2.8750 – 8	UN	2A	0.0025	2.8725	2.8575	...	2.7913	2.7829	0.008426	2.7372	2.7017	2.7191	...	0.0180	0.0135	2.7282	2.7122	0.0226	0.0188
		3A	0.0000	2.8750	2.8600	...	2.7938	2.7875	0.0063	2.7397	2.7063	2.7216	...	0.0180	0.0135	2.7307	2.7168	0.0226	0.0188

Table 2A
Limits of Size for Standard Series External Threads (UN, UNR, and UNJ) (Cont'd)

Nominal Size and Threads/in.	Series Designa- tion	Class [Note (1)]	Allowance, <i>es</i>	Major Diameter, <i>d</i>			Pitch Diameter, <i>d</i> ₂ , and Functional Diameter [Note (4)]		Tolerance, <i>Td</i> ₂ [Note (5)]	Minor Diameter, <i>d</i> ₁ /Root Radius									
										UN		UNR				UNJ			
										Reference Diameter [Notes (6), (7)]	Reference Diameter [Note (6)]	Radius		Diameter		Radius			
				Max. [Note (2)]	Min.	Min. [Note (3)]	Max. [Note (2)]	Min.		Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
2 ⁷ / ₈ – 12 or 2.8750 – 12	UN	2A	0.0019	2.8731	2.8617	...	2.8190	2.8127	0.006294	2.7829	2.7586	2.7709	...	0.0120	0.0090	2.7769	2.7656	0.0150	0.0125
		3A	0.0000	2.8750	2.8636	...	2.8209	2.8162	0.0047	2.7848	2.7621	2.7728	...	0.0120	0.0090	2.7788	2.7691	0.0150	0.0125
(8) 2 ⁷ / ₈ – 16 or 2.8750 – 16	UN	2A	0.0017	2.8733	2.8639	...	2.8327	2.8271	0.005620	2.8056	2.7865	2.7966	...	0.0090	0.0068	2.8011	2.7917	0.0113	0.0094
		3A	0.0000	2.8750	2.8656	...	2.8344	2.8302	0.0042	2.8073	2.7896	2.7983	...	0.0090	0.0068	2.8028	2.7948	0.0113	0.0094
(8) 2 ⁷ / ₈ – 20 or 2.8750 – 20	UN	2A	0.0016	2.8734	2.8653	...	2.8409	2.8357	0.005175	2.8193	2.8032	2.8121	...	0.0072	0.0054	2.8156	2.8074	0.0090	0.0075
		3A	0.0000	2.8750	2.8669	...	2.8425	2.8386	0.0039	2.8209	2.8061	2.8137	...	0.0072	0.0054	2.8172	2.8103	0.0090	0.0075
3 – 4 or 3.0000 – 4	UNC	1A	0.0032	2.9968	2.9611	...	2.8344	2.8183	0.0161	2.7262	2.6559	2.6901	...	0.0361	0.0271	...	...	...	...
		2A	0.0032	2.9968	2.9730	2.9611	2.8344	2.8237	0.010714	2.7262	2.6613	2.6901	...	0.0361	0.0271	2.7081	2.6823	0.0451	0.0375
		3A	0.0000	3.0000	2.9762	...	2.8376	2.8296	0.0080	2.7294	2.6672	2.6933	...	0.0361	0.0271	2.7113	2.6882	0.0451	0.0375
3 – or 3.0000 – 6	UN	2A	0.0028	2.9972	2.9790	...	2.8889	2.8796	0.009304	2.8168	2.7713	2.7927	...	0.0241	0.0180	2.8047	2.7853	0.0301	0.0250
		3A	0.0000	3.0000	2.9818	...	2.8917	2.8847	0.0070	2.8196	2.7764	2.7955	...	0.0241	0.0180	2.8075	2.7904	0.0301	0.0250
3 – 8 or 3.0000 – 8	UN	2A	0.0026	2.9974	2.9824	2.9749	2.9162	2.9077	0.008511	2.8621	2.8265	2.8440	...	0.0180	0.0135	2.8531	2.8370	0.0226	0.0188
		3A	0.0000	3.0000	2.9850	...	2.9188	2.9124	0.0064	2.8647	2.8312	2.8466	...	0.0180	0.0135	2.8557	2.8417	0.0226	0.0188
3 – 12 or 3.0000 – 12	UN	2A	0.0019	2.9981	2.9867	...	2.9440	2.9377	0.006324	2.9079	2.8836	2.8959	...	0.0120	0.0090	2.9019	2.8906	0.0150	0.0125
		3A	0.0000	3.0000	2.9886	...	2.9459	2.9412	0.0047	2.9098	2.8871	2.8978	...	0.0120	0.0090	2.9038	2.8941	0.0150	0.0125
(8) 3 – 16 or 3.0000 – 16	UN	2A	0.0017	2.9983	2.9889	...	2.9577	2.9520	0.005650	2.9306	2.9115	2.9216	...	0.0090	0.0068	2.9261	2.9167	0.0113	0.0094
		3A	0.0000	3.0000	2.9906	...	2.9594	2.9552	0.0042	2.9323	2.9146	2.9233	...	0.0090	0.0068	2.9278	2.9198	0.0113	0.0094
(8) 3 – 20 or 3.0000 – 20	UN	2A	0.0016	2.9984	2.9903	...	2.9659	2.9607	0.005205	2.9443	2.9282	2.9371	...	0.0072	0.0054	2.9406	2.9324	0.0090	0.0075
		3A	0.0000	3.0000	2.9919	...	2.9675	2.9636	0.0039	2.9459	2.9311	2.9387	...	0.0072	0.0054	2.9422	2.9353	0.0090	0.0075
3 ¹ / ₈ – 4 or 3.1250 – 4	UN	2A	0.0032	3.1218	3.0980	...	2.9594	2.9486	0.010798	2.8512	2.7862	2.8151	...	0.0361	0.0271	2.8331	2.8072	0.0451	0.0375
		3A	0.0000	3.1250	3.1012	...	2.9626	2.9545	0.0081	2.8544	2.7921	2.8183	...	0.0361	0.0271	2.8363	2.8131	0.0451	0.0375
3 ¹ / ₈ – 6 or 3.1250 – 6	UN	2A	0.0028	3.1222	3.1040	...	3.0139	3.0045	0.009388	2.9418	2.8962	2.9177	...	0.0241	0.0180	2.9297	2.9102	0.0301	0.0250
		3A	0.0000	3.1250	3.1068	...	3.0167	3.0097	0.0070	2.9446	2.9014	2.9205	...	0.0241	0.0180	2.9325	2.9154	0.0301	0.0250
3 ¹ / ₈ – 8 or 3.1250 – 8	UN	2A	0.0026	3.1224	3.1074	...	3.0412	3.0326	0.008595	2.9871	2.9514	2.9690	...	0.0180	0.0135	2.9781	2.9619	0.0226	0.0188
		3A	0.0000	3.1250	3.1100	...	3.0438	3.0374	0.0064	2.9897	2.9562	2.9716	...	0.0180	0.0135	2.9807	2.9667	0.0226	0.0188
(8) 3 ¹ / ₈ – 12 or 3.1250 – 12	UN	2A	0.0019	3.1231	3.1117	...	3.0690	3.0626	0.006354	3.0329	3.0085	3.0209	...	0.0120	0.0090	3.0269	3.0155	0.0150	0.0125
		3A	0.0000	3.1250	3.1136	...	3.0709	3.0661	0.0048	3.0348	3.0120	3.0228	...	0.0120	0.0090	3.0288	3.0190	0.0150	0.0125

Table 2A
Limits of Size for Standard Series External Threads (UN, UNR, and UNJ) (Cont'd)

	Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Allowance, es	Major Diameter, <i>d</i>			Pitch Diameter, <i>d</i> ₂ , and Functional Diameter [Note (4)]			Minor Diameter, <i>d</i> ₁ /Root Radius									
											UN		UNR				UNJ			
											Reference Diameter [Notes (6), (7)]		Reference Diameter [Note (6)]		Radius		Diameter		Radius	
					Max. [Note (2)]	Min.	Min. [Note (3)]	Max. [Note (2)]	Min.	Tolerance, <i>Td</i> ₂ [Note (5)]	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
(8)	3 ¹ / ₈ – 16 or 3.1250 – 16	UN	2A	0.0017	3.1233	3.1139	...	3.0827	3.0770	0.005680	3.0556	3.0364	3.0466	...	0.0090	0.0068	3.0511	3.0416	0.0113	0.0094
(8)	16		3A	0.0000	3.1250	3.1156	...	3.0844	3.0801	0.0043	3.0573	3.0395	3.0483	...	0.0090	0.0068	3.0528	3.0447	0.0113	0.0094
	3 ¹ / ₄ – 4 or 3.2500 – 4	UNC	1A	0.0033	3.2467	3.2110	...	3.0843	3.0680	0.0163	2.9761	2.9056	2.9400	...	0.0361	0.0271	...	...	...	...
	4		2A	0.0033	3.2467	3.2229	3.2110	3.0843	3.0734	0.010879	2.9761	2.9110	2.9400	...	0.0361	0.0271	2.9580	2.9320	0.0451	0.0375
	4		3A	0.0000	3.2500	3.2262	...	3.0876	3.0794	0.0082	2.9794	2.9170	2.9433	...	0.0361	0.0271	2.9613	2.9380	0.0451	0.0375
	3 ¹ / ₄ – 6 or 3.2500 – 6	UN	2A	0.0028	3.2472	3.2290	...	3.1389	3.1294	0.009469	3.0668	3.0211	3.0427	...	0.0241	0.0180	3.0547	3.0351	0.0301	0.0250
	6		3A	0.0000	3.2500	3.2318	...	3.1417	3.1346	0.0071	3.0696	3.0263	3.0455	...	0.0241	0.0180	3.0575	3.0403	0.0301	0.0250
	3 ¹ / ₄ – 8 or 3.2500 – 8	UN	2A	0.0026	3.2474	3.2324	3.2249	3.1662	3.1575	0.008676	3.1121	3.0763	3.0940	...	0.0180	0.0135	3.1031	3.0868	0.0226	0.0188
	8		3A	0.0000	3.2500	3.2350	...	3.1688	3.1623	0.0065	3.1147	3.0811	3.0966	...	0.0180	0.0135	3.1057	3.0916	0.0226	0.0188
(8)	3 ¹ / ₄ – 12 or 3.2500 – 12	UN	2A	0.0019	3.2481	3.2367	...	3.1940	3.1876	0.006383	3.1579	3.1335	3.1459	...	0.0120	0.0090	3.1519	3.1405	0.0150	0.0125
(8)	12		3A	0.0000	3.2500	3.2386	...	3.1959	3.1911	0.0048	3.1598	3.1370	3.1478	...	0.0120	0.0090	3.1538	3.1440	0.0150	0.0125
(8)	3 ¹ / ₄ – 16 or 3.2500 – 16	UN	2A	0.0017	3.2483	3.2389	...	3.2077	3.2020	0.005709	3.1806	3.1614	3.1716	...	0.0090	0.0068	3.1761	3.1666	0.0113	0.0094
(8)	16		3A	0.0000	3.2500	3.2406	...	3.2094	3.2051	0.0043	3.1823	3.1645	3.1733	...	0.0090	0.0068	3.1778	3.1697	0.0113	0.0094
	3 ³ / ₈ – 4 or 3.3750 – 4	UN	2A	0.0033	3.3717	3.3479	...	3.2093	3.1983	0.010959	3.1011	3.0359	3.0650	...	0.0361	0.0271	3.0830	3.0569	0.0451	0.0375
	4		3A	0.0000	3.3750	3.3512	...	3.2126	3.2044	0.0082	3.1044	3.0420	3.0683	...	0.0361	0.0271	3.0863	3.0630	0.0451	0.0375
	3 ³ / ₈ – 6 or 3.3750 – 6	UN	2A	0.0029	3.3721	3.3539	...	3.2638	3.2543	0.009549	3.1917	3.1460	3.1676	...	0.0241	0.0180	3.1796	3.1600	0.0301	0.0250
	6		3A	0.0000	3.3750	3.3568	...	3.2667	3.2595	0.0072	3.1946	3.1512	3.1705	...	0.0241	0.0180	3.1825	3.1652	0.0301	0.0250
	3 ³ / ₈ – 8 or 3.3750 – 8	UN	2A	0.0026	3.3724	3.3574	...	3.2912	3.2824	0.008756	3.2371	3.2012	3.2190	...	0.0180	0.0135	3.2281	3.2117	0.0226	0.0188
	8		3A	0.0000	3.3750	3.3600	...	3.2938	3.2872	0.0066	3.2397	3.2060	3.2216	...	0.0180	0.0135	3.2307	3.2165	0.0226	0.0188
(8)	3 ³ / ₈ – 12 or 3.3750 – 12	UN	2A	0.0019	3.3731	3.3617	...	3.3190	3.3126	0.006411	3.2829	3.2585	3.2709	...	0.0120	0.0090	3.2769	3.2655	0.0150	0.0125
	12		3A	0.0000	3.3750	3.3636	...	3.3209	3.3161	0.0048	3.2848	3.2620	3.2728	...	0.0120	0.0090	3.2788	3.2690	0.0150	0.0125
(8)	3 ³ / ₈ – 16 or 3.3750 – 16	UN	2A	0.0017	3.3733	3.3639	...	3.3327	3.3270	0.005737	3.3056	3.2864	3.2966	...	0.0090	0.0068	3.3011	3.2916	0.0113	0.0094
(8)	16		3A	0.0000	3.3750	3.3656	...	3.3344	3.3301	0.0043	3.3073	3.2895	3.2983	...	0.0090	0.0068	3.3028	3.2947	0.0113	0.0094
	3 ¹ / ₂ – 4 or 3.5000 – 4	UNC	1A	0.0033	3.4967	3.4610	...	3.3343	3.3177	0.0166	3.2261	3.1553	3.1900	...	0.0361	0.0271	...	...	...	...
	4		2A	0.0033	3.4967	3.4729	3.4610	3.3343	3.3233	0.011036	3.2261	3.1609	3.1900	...	0.0361	0.0271	3.2080	3.1819	0.0451	0.0375
	4		3A	0.0000	3.5000	3.4762	...	3.3376	3.3293	0.0083	3.2294	3.1669	3.1933	...	0.0361	0.0271	3.2113	3.1879	0.0451	0.0375
	3 ¹ / ₂ – 6 or 3.5000 – 6	UN	2A	0.0029	3.4971	3.4789	...	3.3888	3.3792	0.009626	3.3167	3.2709	3.2926	...	0.0241	0.0180	3.3046	3.2849	0.0301	0.0250
	6		3A	0.0000	3.5000	3.4818	...	3.3917	3.3845	0.0072	3.3196	3.2762	3.2955	...	0.0241	0.0180	3.3075	3.2902	0.0301	0.0250

Table 2A
Limits of Size for Standard Series External Threads (UN, UNR, and UNJ) (Cont'd)

							Minor Diameter, d_1 /Root Radius												
							Pitch Diameter, d_2 , and Functional Diameter [Note (4)]		UN		UNR				UNJ				
									Reference Diameter [Notes (6), (7)]	Reference Diameter [Note (6)]	Radius	Diameter	Radius						
Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Allowance, es	Max. [Note (2)]	Min.	Min. [Note (3)]	Max. [Note (2)]	Tolerance, Td_2 [Note (5)]	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.
1	2	3		4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
$3\frac{1}{2}$ – 8 or 3.5000 – 8	UN	2A	0.0026	3.4974	3.4824	3.4749	3.4162	3.4074	0.008833	3.3621	3.3262	3.3440	...	0.0180	0.0135	3.3531	3.3367	0.0226	0.0188
		3A	0.0000	3.5000	3.4850	...	3.4188	3.4122	0.0066	3.3647	3.3310	3.3466	...	0.0180	0.0135	3.3557	3.3415	0.0226	0.0188
$3\frac{1}{2}$ – 12 or 3.5000 – 12	UN	2A	0.0019	3.4981	3.4867	...	3.4440	3.4376	0.006438	3.4079	3.3835	3.3959	...	0.0120	0.0090	3.4019	3.3905	0.0150	0.0125
		3A	0.0000	3.5000	3.4886	...	3.4459	3.4411	0.0048	3.4098	3.3870	3.3978	...	0.0120	0.0090	3.4038	3.3940	0.0150	0.0125
$3\frac{1}{2}$ – 16 or 3.5000 – 16	UN	2A	0.0017	3.4983	3.4889	...	3.4577	3.4519	0.005764	3.4306	3.4113	3.4216	...	0.0090	0.0068	3.4261	3.4165	0.0113	0.0094
		3A	0.0000	3.5000	3.4906	...	3.4594	3.4551	0.0043	3.4323	3.4145	3.4233	...	0.0090	0.0068	3.4278	3.4197	0.0113	0.0094
$3\frac{5}{8}$ – 4 or 3.6250 – 4	UN	2A	0.0033	3.6217	3.5979	...	3.4593	3.4482	0.011113	3.3511	3.2858	3.3150	...	0.0361	0.0271	3.3330	3.3068	0.0451	0.0375
		3A	0.0000	3.6250	3.6012	...	3.4626	3.4543	0.0083	3.3544	3.2919	3.3183	...	0.0361	0.0271	3.3363	3.3129	0.0451	0.0375
$3\frac{5}{8}$ – 6 or 3.6250 – 6	UN	2A	0.0029	3.6221	3.6039	...	3.5138	3.5041	0.009703	3.4417	3.3958	3.4176	...	0.0241	0.0180	3.4296	3.4098	0.0301	0.0250
		3A	0.0000	3.6250	3.6068	...	3.5167	3.5094	0.0073	3.4446	3.4011	3.4205	...	0.0241	0.0180	3.4325	3.4151	0.0301	0.0250
$3\frac{5}{8}$ – 8 or 3.6250 – 8	UN	2A	0.0027	3.6223	3.6073	...	3.5411	3.5322	0.008910	3.4870	3.4510	3.4689	...	0.0180	0.0135	3.4780	3.4615	0.0226	0.0188
		3A	0.0000	3.6250	3.6100	...	3.5438	3.5371	0.0067	3.4897	3.4559	3.4716	...	0.0180	0.0135	3.4807	3.4664	0.0226	0.0188
$3\frac{5}{8}$ – 12 or 3.6250 – 12	UN	2A	0.0019	3.6231	3.6117	...	3.5690	3.5625	0.006465	3.5329	3.5084	3.5209	...	0.0120	0.0090	3.5269	3.5154	0.0150	0.0125
		3A	0.0000	3.6250	3.6136	...	3.5709	3.5661	0.0048	3.5348	3.5120	3.5228	...	0.0120	0.0090	3.5288	3.5190	0.0150	0.0125
$3\frac{5}{8}$ – 16 or 3.6250 – 16	UN	2A	0.0017	3.6233	3.6139	...	3.5827	3.5769	0.005791	3.5556	3.5363	3.5466	...	0.0090	0.0068	3.5511	3.5415	0.0113	0.0094
		3A	0.0000	3.6250	3.6156	...	3.5844	3.5801	0.0043	3.5573	3.5395	3.5483	...	0.0090	0.0068	3.5528	3.5447	0.0113	0.0094
$3\frac{3}{4}$ – 4 or 3.7500 – 4	UNC	1A	0.0034	3.7466	3.7109	...	3.5842	3.5674	0.0168	3.4760	3.4050	3.4399	...	0.0361	0.0271	...	...	...	...
		2A	0.0034	3.7466	3.7228	3.7109	3.5842	3.5730	0.011188	3.4760	3.4106	3.4399	...	0.0361	0.0271	3.4579	3.4316	0.0451	0.0375
		3A	0.0000	3.7500	3.7262	...	3.5876	3.5792	0.0084	3.4794	3.4168	3.4433	...	0.0361	0.0271	3.4613	3.4378	0.0451	0.0375
$3\frac{3}{4}$ – 6 or 3.7500 – 6	UN	2A	0.0029	3.7471	3.7289	...	3.6388	3.6290	0.009778	3.5667	3.5207	3.5426	...	0.0241	0.0180	3.5546	3.5347	0.0301	0.0250
		3A	0.0000	3.7500	3.7318	...	3.6417	3.6344	0.0073	3.5696	3.5261	3.5455	...	0.0241	0.0180	3.5575	3.5401	0.0301	0.0250
$3\frac{3}{4}$ – 8 or 3.7500 – 8	UN	2A	0.0027	3.7473	3.7323	3.7248	3.6661	3.6571	0.008985	3.6120	3.5759	3.5939	...	0.0180	0.0135	3.6030	3.5864	0.0226	0.0188
		3A	0.0000	3.7500	3.7350	...	3.6688	3.6621	0.0067	3.6147	3.5809	3.5966	...	0.0180	0.0135	3.6057	3.5914	0.0226	0.0188
$3\frac{3}{4}$ – 12 or 3.7500 – 12	UN	2A	0.0019	3.7481	3.7367	...	3.6940	3.6875	0.006491	3.6579	3.6334	3.6459	...	0.0120	0.0090	3.6519	3.6404	0.0150	0.0125
		3A	0.0000	3.7500	3.7386	...	3.6959	3.6910	0.0049	3.6598	3.6369	3.6478	...	0.0120	0.0090	3.6538	3.6439	0.0150	0.0125
$3\frac{3}{4}$ – 16 or 3.7500 – 16	UN	2A	0.0017	3.7483	3.7389	...	3.7077	3.7019	0.005817	3.6806	3.6613	3.6716	...	0.0090	0.0068	3.6761	3.6665	0.0113	0.0094
		3A	0.0000	3.7500	3.7406	...	3.7094	3.7050	0.0044	3.6823	3.6644	3.6733	...	0.0090	0.0068	3.6778	3.6696	0.0113	0.0094

Table 2A
Limits of Size for Standard Series External Threads (UN, UNR, and UNJ) (Cont'd)

Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Allowance, es	Major Diameter, <i>d</i>			Pitch Diameter, <i>d</i> ₂ , and Functional Diameter [Note (4)]			Minor Diameter, <i>d</i> ₁ /Root Radius									
										UN		UNR				UNJ			
										Reference Diameter [Notes (6), (7)]		Reference Diameter [Note (6)]		Radius		Diameter		Radius	
										Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
3 ⁷ / ₈ – 4 or 3.8750 – 4	UN	2A	0.0034	3.8716	3.8478	...	3.7092	3.6979	0.011262	3.6010	3.5355	3.5649	...	0.0361	0.0271	3.5829	3.5565	0.0451	0.0375
		3A	0.0000	3.8750	3.8512	...	3.7126	3.7042	0.0084	3.6044	3.5418	3.5683	...	0.0361	0.0271	3.5863	3.5628	0.0451	0.0375
3 ⁷ / ₈ – 6 or 3.8750 – 6	UN	2A	0.0030	3.8720	3.8538	...	3.7637	3.7538	0.009852	3.6916	3.6455	3.6675	...	0.0241	0.0180	3.6795	3.6595	0.0301	0.0250
		3A	0.0000	3.8750	3.8568	...	3.7667	3.7593	0.0074	3.6946	3.6510	3.6705	...	0.0241	0.0180	3.6825	3.6650	0.0301	0.0250
3 ⁷ / ₈ – 8 or 3.8750 – 8	UN	2A	0.0027	3.8723	3.8573	...	3.7911	3.7820	0.009059	3.7370	3.7008	3.7189	...	0.0180	0.0135	3.7280	3.7113	0.0226	0.0188
		3A	0.0000	3.8750	3.8600	...	3.7938	3.7870	0.0068	3.7397	3.7058	3.7216	...	0.0180	0.0135	3.7307	3.7163	0.0226	0.0188
3 ⁷ / ₈ – 12 or 3.8750 – 12	UN	2A	0.0020	3.8730	3.8616	...	3.8189	3.8124	0.006517	3.7828	3.7583	3.7708	...	0.0120	0.0090	3.7768	3.7653	0.0150	0.0125
		3A	0.0000	3.8750	3.8636	...	3.8209	3.8160	0.0049	3.7848	3.7619	3.7728	...	0.0120	0.0090	3.7788	3.7689	0.0150	0.0125
(8) 3 ⁷ / ₈ – 16 or 3.8750 – 16	UN	2A	0.0018	3.8732	3.8638	...	3.8326	3.8268	0.005843	3.8055	3.7862	3.7965	...	0.0090	0.0068	3.8010	3.7914	0.0113	0.0094
		3A	0.0000	3.8750	3.8656	...	3.8344	3.8300	0.0044	3.8073	3.7894	3.7983	...	0.0090	0.0068	3.8028	3.7946	0.0113	0.0094
4 – 4 or 4.0000 – 4	UNC	1A	0.0034	3.9966	3.9609	...	3.8342	3.8172	0.0170	3.7260	3.6548	3.6899	...	0.0361	0.0271	...	...	...	...
		2A	0.0034	3.9966	3.9728	3.9609	3.8342	3.8229	0.011334	3.7260	3.6605	3.6899	...	0.0361	0.0271	3.7079	3.6815	0.0451	0.0375
		3A	0.0000	4.0000	3.9762	...	3.8376	3.8291	0.0085	3.7294	3.6667	3.6933	...	0.0361	0.0271	3.7113	3.6877	0.0451	0.0375
4 – 6 or 4.0000 – 6	UN	2A	0.0030	3.9970	3.9788	...	3.8887	3.8788	0.009924	3.8166	3.7705	3.7925	...	0.0241	0.0180	3.8045	3.7845	0.0301	0.0250
		3A	0.0000	4.0000	3.9818	...	3.8917	3.8843	0.0074	3.8196	3.7760	3.7955	...	0.0241	0.0180	3.8075	3.7900	0.0301	0.0250
4 – 8 or 4.0000 – 8	UN	2A	0.0027	3.9973	3.9823	3.9748	3.9161	3.9070	0.009131	3.8620	3.8258	3.8439	...	0.0180	0.0135	3.8530	3.8363	0.0226	0.0188
		3A	0.0000	4.0000	3.9850	...	3.9188	3.9120	0.0068	3.8647	3.8308	3.8466	...	0.0180	0.0135	3.8557	3.8413	0.0226	0.0188
4 – 12 or 4.0000 – 12	UN	2A	0.0020	3.9980	3.9866	...	3.9439	3.9374	0.006542	3.9078	3.8833	3.8958	...	0.0120	0.0090	3.9018	3.8903	0.0150	0.0125
		3A	0.0000	4.0000	3.9886	...	3.9459	3.9410	0.0049	3.9098	3.8869	3.8978	...	0.0120	0.0090	3.9038	3.8939	0.0150	0.0125
(8) 4 – 16 or 4.0000 – 16	UN	2A	0.0018	3.9982	3.9888	...	3.9576	3.9517	0.005868	3.9305	3.9111	3.9215	...	0.0090	0.0068	3.9260	3.9163	0.0113	0.0094
		3A	0.0000	4.0000	3.9906	...	3.9594	3.9550	0.0044	3.9323	3.9144	3.9233	...	0.0090	0.0068	3.9278	3.9196	0.0113	0.0094
4 ¹ / ₈ – 4 or 4.1250 – 4	UN	2A	0.0034	4.1216	4.0978	...	3.9592	3.9478	0.011406	3.8510	3.7854	3.8149	...	0.0361	0.0271	3.8329	3.8064	0.0451	0.0375
		3A	0.0000	4.1250	4.1012	...	3.9626	3.9540	0.0086	3.8544	3.7916	3.8183	...	0.0361	0.0271	3.8363	3.8126	0.0451	0.0375
4 ¹ / ₈ – 6 or 4.1250 – 6	UN	2A	0.0030	4.1220	4.1038	...	4.0137	4.0037	0.009996	3.9416	3.8954	3.9175	...	0.0241	0.0180	3.9295	3.9094	0.0301	0.0250
		3A	0.0000	4.1250	4.1068	...	4.0167	4.0092	0.0075	3.9446	3.9009	3.9205	...	0.0241	0.0180	3.9325	3.9149	0.0301	0.0250
4 ¹ / ₈ – 8 or 4.1250 – 8	UN	2A	0.0028	4.1222	4.1072	...	4.0410	4.0318	0.009203	3.9869	3.9506	3.9688	...	0.0180	0.0135	3.9779	3.9611	0.0226	0.0188
		3A	0.0000	4.1250	4.1100	...	4.0438	4.0369	0.0069	3.9897	3.9570	3.9716	...	0.0180	0.0135	3.9807	3.9662	0.0226	0.0188

Table 2A
Limits of Size for Standard Series External Threads (UN, UNR, and UNJ) (Cont'd)

							Major Diameter, <i>d</i>		Pitch Diameter, <i>d</i> ₂ , and Functional Diameter [Note (4)]		Minor Diameter, <i>d</i> ₁ /Root Radius									
											UN		UNR				UNJ			
											Reference Diameter [Notes (6), (7)]	Tolerance, <i>Td</i> ₂ [Note (5)]	Reference Diameter [Note (6)]	Radius		Diameter		Radius		
Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Allowance, <i>es</i>	Max. [Note (2)]	Min.	Min. [Note (3)]	Max. [Note (2)]	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
(8) 4 ¹ / ₈ – 12 or 4.1250 – 12	UN	2A	0.0020	4.1230	4.1116	...	4.0689	4.0623	0.006567	4.0328	4.0082	4.0208	...	0.0120	0.0090	4.0268	4.0152	0.0150	0.0125	
		3A	0.0000	4.1250	4.1136	...	4.0709	4.0660	0.0049	4.0348	4.0119	4.0228	...	0.0120	0.0090	4.0288	4.0189	0.0150	0.0125	
(8) 4 ¹ / ₈ – 16 or 4.1250 – 16	UN	2A	0.0018	4.1232	4.1138	...	4.0826	4.0767	0.005893	4.0555	4.0361	4.0465	...	0.0090	0.0068	4.0510	4.0413	0.0113	0.0094	
		3A	0.0000	4.1250	4.1156	...	4.0844	4.0800	0.0044	4.0573	4.0394	4.0483	...	0.0090	0.0068	4.0528	4.0446	0.0113	0.0094	
4 ¹ / ₄ – 4 or 4.2500 – 4	UNC	2A	0.0034	4.2466	4.2228	...	4.0842	4.0727	0.011475	3.9760	3.9103	3.9399	...	0.0361	0.0271	3.9579	3.9313	0.0451	0.0375	
		3A	0.0000	4.2500	4.2262	...	4.0876	4.0790	0.0086	3.9794	3.9166	3.9433	...	0.0361	0.0271	3.9613	3.9376	0.0451	0.0375	
4 ¹ / ₄ – 6 or 4.2500 – 6	UN	2A	0.0030	4.2470	4.2288	...	4.1387	4.1286	0.010065	4.0666	4.0203	4.0425	...	0.0241	0.0180	4.0545	4.0343	0.0301	0.0250	
		3A	0.0000	4.2500	4.2318	...	4.1417	4.1342	0.0075	4.0696	4.0259	4.0455	...	0.0241	0.0180	4.0575	4.0399	0.0301	0.0250	
(8) 4 ¹ / ₄ – 8 or 4.2500 – 8	UN	2A	0.0028	4.2472	4.2322	...	4.1660	4.1567	0.009272	4.1119	4.0755	4.0938	...	0.0180	0.0135	4.1029	4.0860	0.0226	0.0188	
		3A	0.0000	4.2500	4.2350	...	4.1688	4.1618	0.0070	4.1147	4.0806	4.0966	...	0.0180	0.0135	4.1057	4.0911	0.0226	0.0188	
(8) 4 ¹ / ₄ – 12 or 4.2500 – 12	UN	2A	0.0020	4.2480	4.2366	...	4.1939	4.1873	0.006591	4.1578	4.1332	4.1458	...	0.0120	0.0090	4.1518	4.1402	0.0150	0.0125	
		3A	0.0000	4.2500	4.2386	...	4.1959	4.1910	0.0049	4.1598	4.1369	4.1478	...	0.0120	0.0090	4.1538	4.1439	0.0150	0.0125	
(8) 4 ¹ / ₄ – 16 or 4.2500 – 16	UN	2A	0.0018	4.2482	4.2388	...	4.2076	4.2017	0.005917	4.1805	4.1611	4.1715	...	0.0090	0.0068	4.1760	4.1663	0.0113	0.0094	
		3A	0.0000	4.2500	4.2406	...	4.2094	4.2050	0.0044	4.1823	4.1644	4.1733	...	0.0090	0.0068	4.1778	4.1696	0.0113	0.0094	
4 ³ / ₈ – 4 or 4.3750 – 4	UN	2A	0.0035	4.3715	4.3477	...	4.2091	4.1976	0.011543	4.1009	4.0352	4.0648	...	0.0361	0.0271	4.0828	4.0562	0.0451	0.0375	
		3A	0.0000	4.3750	4.3512	...	4.2126	4.2039	0.0087	4.1044	4.0415	4.0683	...	0.0361	0.0271	4.0863	4.0625	0.0451	0.0375	
4 ³ / ₈ – 6 or 4.3750 – 6	UN	2A	0.0030	4.3720	4.3538	...	4.2637	4.2536	0.010133	4.1916	4.1453	4.1675	...	0.0241	0.0180	4.1795	4.1593	0.0301	0.0250	
		3A	0.0000	4.3750	4.3568	...	4.2667	4.2591	0.0076	4.1946	4.1508	4.1705	...	0.0241	0.0180	4.1825	4.1648	0.0301	0.0250	
(8) 4 ³ / ₈ – 8 or 4.3750 – 8	UN	2A	0.0028	4.3722	4.3572	...	4.2910	4.2817	0.009340	4.2369	4.2005	4.2188	...	0.0180	0.0135	4.2279	4.2110	0.0226	0.0188	
		3A	0.0000	4.3750	4.3600	...	4.2938	4.2868	0.0070	4.2397	4.2056	4.2216	...	0.0180	0.0135	4.2307	4.2161	0.0226	0.0188	
(8) 4 ³ / ₈ – 12 or 4.3750 – 12	UN	2A	0.0020	4.3730	4.3616	...	4.3189	4.3123	0.006614	4.2828	4.2582	4.2708	...	0.0120	0.0090	4.2768	4.2652	0.0150	0.0125	
		3A	0.0000	4.3750	4.3636	...	4.3209	4.3159	0.0050	4.2848	4.2618	4.2728	...	0.0120	0.0090	4.2788	4.2688	0.0150	0.0125	
(8) 4 ³ / ₈ – 16 or 4.3750 – 16	UN	2A	0.0018	4.3732	4.3638	...	4.3326	4.3267	0.005940	4.3055	4.2861	4.2965	...	0.0090	0.0068	4.3010	4.2913	0.0113	0.0094	
		3A	0.0000	4.3750	4.3656	...	4.3344	4.3299	0.0045	4.3073	4.2893	4.2983	...	0.0090	0.0068	4.3028	4.2945	0.0113	0.0094	
4 ¹ / ₂ – 4 or 4.5000 – 4	UNC	2A	0.0035	4.4965	4.4727	...	4.3341	4.3225	0.011611	4.2259	4.1601	4.1898	...	0.0361	0.0271	4.2078	4.1811	0.0451	0.0375	
		3A	0.0000	4.5000	4.4762	...	4.3376	4.3289	0.0087	4.2294	4.1665	4.1933	...	0.0361	0.0271	4.2113	4.1875	0.0451	0.0375	

Table 2A
Limits of Size for Standard Series External Threads (UN, UNR, and UNJ) (Cont'd)

Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Allowance, <i>es</i>	Major Diameter, <i>d</i>			Pitch Diameter, <i>d</i> ₂ , and Functional Diameter [Note (4)]		Tolerance, <i>Td</i> ₂ [Note (5)]	Minor Diameter, <i>d</i> ₁ /Root Radius									
										UN		UNR				UNJ			
										Reference Diameter [Notes (6), (7)]		Reference Diameter [Note (6)]		Radius		Diameter		Radius	
										Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
4½ – 6 or 4.5000 – 6	UN	2A	0.0031	4.4969	4.4787	...	4.3886	4.3784	0.010201	4.3165	4.2701	4.2924	...	0.0241	0.0180	4.3044	4.2841	0.0301	0.0250
		3A	0.0000	4.5000	4.4818	...	4.3917	4.3840	0.0077	4.3196	4.2757	4.2955	...	0.0241	0.0180	4.3075	4.2897	0.0301	0.0250
4½ – 8 or 4.5000 – 8	UN	2A	0.0028	4.4972	4.4822	...	4.4160	4.4066	0.009408	4.3619	4.3254	4.3438	...	0.0180	0.0135	4.3529	4.3359	0.0226	0.0188
		3A	0.0000	4.5000	4.4850	...	4.4188	4.4117	0.0071	4.3647	4.3305	4.3466	...	0.0180	0.0135	4.3557	4.3410	0.0226	0.0188
(8) 4½ – 12 or 4.5000 – 12	UN	2A	0.0020	4.4980	4.4866	...	4.4439	4.4373	0.006637	4.4078	4.3832	4.3958	...	0.0120	0.0090	4.4018	4.3902	0.0150	0.0125
		3A	0.0000	4.5000	4.4886	...	4.4459	4.4409	0.0050	4.4098	4.3868	4.3978	...	0.0120	0.0090	4.4038	4.3938	0.0150	0.0125
(8) 4½ – 16 or 4.5000 – 16	UN	2A	0.0018	4.4982	4.4888	...	4.4576	4.4516	0.005963	4.4305	4.4110	4.4215	...	0.0090	0.0068	4.4260	4.4162	0.0113	0.0094
		3A	0.0000	4.5000	4.4906	...	4.4594	4.4549	0.0045	4.4323	4.4143	4.4233	...	0.0090	0.0068	4.4278	4.4195	0.0113	0.0094
4⅝ – 4 or 4.6250 – 4	UN	2A	0.0035	4.6215	4.5977	...	4.4591	4.4474	0.011678	4.3509	4.2850	4.3148	...	0.0361	0.0271	4.3328	4.3060	0.0451	0.0375
		3A	0.0000	4.6250	4.6012	...	4.4626	4.4538	0.0088	4.3544	4.2914	4.3183	...	0.0361	0.0271	4.3363	4.3124	0.0451	0.0375
4⅝ – 6 or 4.6250 – 6	UN	2A	0.0031	4.6219	4.6037	...	4.5136	4.5033	0.010268	4.4415	4.3950	4.4174	...	0.0241	0.0180	4.4294	4.4090	0.0301	0.0250
		3A	0.0000	4.6250	4.6068	...	4.5167	4.5090	0.0077	4.4446	4.4007	4.4205	...	0.0241	0.0180	4.4325	4.4147	0.0301	0.0250
(8) 4⅝ – 8 or 4.6250 – 8	UN	2A	0.0028	4.6222	4.6072	...	4.5410	4.5315	0.009475	4.4869	4.4503	4.4688	...	0.0180	0.0135	4.4779	4.4608	0.0226	0.0188
		3A	0.0000	4.6250	4.6100	...	4.5438	4.5367	0.0071	4.4897	4.4555	4.4716	...	0.0180	0.0135	4.4807	4.4660	0.0226	0.0188
(8) 4⅝ – 12 or 4.6250 – 12	UN	2A	0.0020	4.6230	4.6116	...	4.5689	4.5622	0.006660	4.5328	4.5081	4.5208	...	0.0120	0.0090	4.5268	4.5151	0.0150	0.0125
		3A	0.0000	4.6250	4.6136	...	4.5709	4.5659	0.0050	4.5348	4.5118	4.5228	...	0.0120	0.0090	4.5288	4.5188	0.0150	0.0125
(8) 4⅝ – 16 or 4.6250 – 16	UN	2A	0.0018	4.6232	4.6138	...	4.5826	4.5766	0.005986	4.5555	4.5360	4.5465	...	0.0090	0.0068	4.5510	4.5412	0.0113	0.0094
		3A	0.0000	4.6250	4.6156	...	4.5844	4.5799	0.0045	4.5573	4.5393	4.5483	...	0.0090	0.0068	4.5528	4.5445	0.0113	0.0094
4¾ – 4 or 4.7500 – 4	UNC	2A	0.0035	4.7465	4.7227	...	4.5841	4.5724	0.011743	4.4759	4.4100	4.4398	...	0.0361	0.0271	4.4578	4.4310	0.0451	0.0375
		3A	0.0000	4.7500	4.7262	...	4.5876	4.5788	0.0088	4.4794	4.4164	4.4433	...	0.0361	0.0271	4.4613	4.4374	0.0451	0.0375
4¾ – 6 or 4.7500 – 6	UN	2A	0.0031	4.7469	4.7287	...	4.6386	4.6283	0.010333	4.5665	4.5200	4.5424	...	0.0241	0.0180	4.5544	4.5340	0.0301	0.0250
		3A	0.0000	4.7500	4.7318	...	4.6417	4.6340	0.0077	4.5696	4.5257	4.5455	...	0.0241	0.0180	4.5575	4.5397	0.0301	0.0250
(8) 4¾ – 8 or 4.7500 – 8	UN	2A	0.0029	4.7471	4.7321	...	4.6659	4.6564	0.009540	4.6118	4.5752	4.5937	...	0.0180	0.0135	4.6028	4.5857	0.0226	0.0188
		3A	0.0000	4.7500	4.7350	...	4.6688	4.6616	0.0072	4.6147	4.5804	4.5966	...	0.0180	0.0135	4.6057	4.5909	0.0226	0.0188

Table 2A
Limits of Size for Standard Series External Threads (UN, UNR, and UNJ) (Cont'd)

							Major Diameter, <i>d</i>		Pitch Diameter, <i>d</i> ₂ , and Functional Diameter [Note (4)]		Minor Diameter, <i>d</i> ₁ /Root Radius									
						UN					UNR				UNJ					
						Reference Diameter [Notes (6), (7)]					Reference Diameter [Note (6)]		Radius		Diameter		Radius			
Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Allowance, <i>es</i>	Max. [Note (2)]	Min.	Min. [Note (3)]	Max. [Note (2)]	Min.	Tolerance, <i>Td</i> ₂ [Note (5)]	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
4 ³ / ₄ – 12 or 4.7500 – 12 (8) 12	UN	2A	0.0020	4.7480	4.7366	...	4.6939	4.6872	0.006682	4.6578	4.6331	4.6458	...	0.0120	0.0090	4.6518	4.6401	0.0150	0.0125	
		3A	0.0000	4.7500	4.7386	...	4.6959	4.6909	0.0050	4.6598	4.6368	4.6478	...	0.0120	0.0090	4.6538	4.6438	0.0150	0.0125	
4 ³ / ₄ – 16 or 4.7500 – 16 (8) (8) 16	UN	2A	0.0018	4.7482	4.7388	...	4.7076	4.7016	0.006008	4.6805	4.6610	4.6715	...	0.0090	0.0068	4.6760	4.6662	0.0113	0.0094	
		3A	0.0000	4.7500	4.7406	...	4.7094	4.7049	0.0045	4.6823	4.6643	4.6733	...	0.0090	0.0068	4.6778	4.6695	0.0113	0.0094	
4 ⁷ / ₈ – 4 or 4.8750 – 4 4	UN	2A	0.0035	4.8715	4.8477	...	4.7091	4.6973	0.011808	4.6009	4.5349	4.5648	...	0.0361	0.0271	4.5828	4.5559	0.0451	0.0375	
		3A	0.0000	4.8750	4.8512	...	4.7126	4.7037	0.0089	4.6044	4.5413	4.5683	...	0.0361	0.0271	4.5863	4.5623	0.0451	0.0375	
4 ⁷ / ₈ – 6 or 4.8750 – 6 6	UN	2A	0.0031	4.8719	4.8537	...	4.7636	4.7532	0.010398	4.6915	4.6449	4.6674	...	0.0241	0.0180	4.6794	4.6589	0.0301	0.0250	
		3A	0.0000	4.8750	4.8568	...	4.7667	4.7589	0.0078	4.6946	4.6506	4.6705	...	0.0241	0.0180	4.6825	4.6646	0.0301	0.0250	
4 ⁷ / ₈ – 8 or 4.8750 – 8 8	UN	2A	0.0029	4.8721	4.8571	...	4.7909	4.7813	0.009605	4.7368	4.7001	4.7187	...	0.0180	0.0135	4.7278	4.7106	0.0226	0.0188	
		3A	0.0000	4.8750	4.8600	...	4.7938	4.7866	0.0072	4.7397	4.7054	4.7216	...	0.0180	0.0135	4.7307	4.7159	0.0226	0.0188	
4 ⁷ / ₈ – 12 or 4.8750 – 12 (8) 12	UN	2A	0.0020	4.8730	4.8616	...	4.8189	4.8122	0.006704	4.7828	4.7581	4.7708	...	0.0120	0.0090	4.7768	4.7651	0.0150	0.0125	
		3A	0.0000	4.8750	4.8636	...	4.8209	4.8159	0.0050	4.7848	4.7618	4.7728	...	0.0120	0.0090	4.7788	4.7688	0.0150	0.0125	
4 ⁷ / ₈ – 16 or 4.8750 – 16 (8) (8) 16	UN	2A	0.0018	4.8732	4.8638	...	4.8326	4.8266	0.006030	4.8055	4.7860	4.7965	...	0.0090	0.0068	4.8010	4.7912	0.0113	0.0094	
		3A	0.0000	4.8750	4.8656	...	4.8344	4.8299	0.0045	4.8073	4.7893	4.7983	...	0.0090	0.0068	4.8028	4.7945	0.0113	0.0094	
5 – 4 or 5.0000 – 4 4	UNC	2A	0.0036	4.9964	4.9726	...	4.8340	4.8221	0.011872	4.7258	4.6597	4.6897	...	0.0361	0.0271	4.7077	4.6807	0.0451	0.0375	
		3A	0.0000	5.0000	4.9762	...	4.8376	4.8287	0.0089	4.7294	4.6663	4.6933	...	0.0361	0.0271	4.7113	4.6873	0.0451	0.0375	
5 – 6 or 5.0000 – 6 6	UN	2A	0.0031	4.9969	4.9787	...	4.8886	4.8781	0.010462	4.8165	4.7698	4.7924	...	0.0241	0.0180	4.8044	4.7838	0.0301	0.0250	
		3A	0.0000	5.0000	4.9818	...	4.8917	4.8839	0.0078	4.8196	4.7756	4.7955	...	0.0241	0.0180	4.8075	4.7896	0.0301	0.0250	
5 – 8 or 5.0000 – 8 (8) 8	UN	2A	0.0029	4.9971	4.9821	...	4.9159	4.9062	0.009669	4.8618	4.8250	4.7955	...	0.0180	0.0135	4.8528	4.8355	0.0226	0.0188	
		3A	0.0000	5.0000	4.9850	...	4.9188	4.9115	0.0073	4.8647	4.8303	4.8466	...	0.0180	0.0135	4.8557	4.8408	0.0226	0.0188	
5 – 12 or 5.0000 – 12 12	UN	2A	0.0020	4.9980	4.9866	...	4.9439	4.9372	0.006726	4.9078	4.8831	4.8958	...	0.0120	0.0090	4.9018	4.8901	0.0150	0.0125	
		3A	0.0000	5.0000	4.9886	...	4.9459	4.9409	0.0050	4.9098	4.8868	4.8978	...	0.0120	0.0090	4.9038	4.8938	0.0150	0.0125	
5 – 16 or 5.0000 – 16 (8) 16	UN	2A	0.0018	4.9982	4.9888	...	4.9576	4.9515	0.006052	4.9305	4.9109	4.9215	...	0.0090	0.0068	4.9260	4.9161	0.0113	0.0094	
		3A	0.0000	5.0000	4.9906	...	4.9594	4.9549	0.0045	4.9323	4.9143	4.9233	...	0.0090	0.0068	4.9278	4.9195	0.0113	0.0094	
5 ¹ / ₈ – 4 or 5.1250 – 4 4	UN	2A	0.0036	5.1214	5.0976	...	4.9590	4.9471	0.011935	4.8508	4.7847	4.8147	...	0.0361	0.0271	4.8327	4.8057	0.0451	0.0375	
		3A	0.0000	5.1250	5.1012	...	4.9626	4.9536	0.0090	4.8544	4.7912	4.8183	...	0.0361	0.0271	4.8363	4.8122	0.0451	0.0375	

Table 2A
Limits of Size for Standard Series External Threads (UN, UNR, and UNJ) (Cont'd)

Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Allowance, <i>es</i>	Major Diameter, <i>d</i>			Pitch Diameter, <i>d</i> ₂ , and Functional Diameter [Note (4)]			Minor Diameter, <i>d</i> ₁ /Root Radius									
										UN		UNR				UNJ			
										Reference Diameter [Notes (6), (7)]		Reference Diameter [Note (6)]							
														Radius		Diameter		Radius	
1	2	3	4	Max. [Note (2)]	Min.	Min. [Note (3)]	Max. [Note (2)]	Min.	Tolerance, <i>Td</i> ₂ [Note (5)]	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.
5 $\frac{1}{8}$ – 6 or 5.1250 – 6	UN	2A	0.0032	5.1218	5.1036	...	5.0135	5.0030	0.010525	4.9414	4.8947	4.9173	...	0.0241	0.0180	4.9293	4.9087	0.0301	0.0250
6		3A	0.0000	5.1250	5.1068	...	5.0167	5.0088	0.0079	4.9446	4.9005	4.9205	...	0.0241	0.0180	4.9325	4.9145	0.0301	0.0250
(8) 5 $\frac{1}{8}$ – 8 or 5.1250 – 8	UN	2A	0.0029	5.1221	5.1071	...	5.0409	5.0312	0.009732	4.9868	4.9500	4.9687	...	0.0180	0.0135	4.9778	4.9605	0.0226	0.0188
8		3A	0.0000	5.1250	5.1100	...	5.0438	5.0365	0.0073	4.9897	4.9553	4.9716	...	0.0180	0.0135	4.9807	4.9658	0.0226	0.0188
(8) 5 $\frac{1}{8}$ – 12 or 5.1250 – 12	UN	2A	0.0020	5.1230	5.1116	...	5.0689	5.0622	0.006747	5.0328	5.0081	5.0208	...	0.0120	0.0090	5.0268	5.0151	0.0150	0.0125
(8) 12		3A	0.0000	5.1250	5.1136	...	5.0709	5.0658	0.0051	5.0348	5.0117	5.0228	...	0.0120	0.0090	5.0288	5.0187	0.0150	0.0125
5 $\frac{1}{8}$ – 16 or 5.1250 – 16	UN	2A	0.0018	5.1232	5.1138	...	5.0826	5.0765	0.006073	5.0555	5.0359	5.0465	...	0.0090	0.0068	5.0510	5.0411	0.0113	0.0094
(8) 16		3A	0.0000	5.1250	5.1156	...	5.0844	5.0798	0.0046	5.0573	5.0392	5.0483	...	0.0090	0.0068	5.0528	5.0444	0.0113	0.0094
5 $\frac{1}{4}$ – 4 or 5.2500 – 4	UNC	2A	0.0036	5.2464	5.2226	...	5.0840	5.0720	0.011997	4.9758	4.9096	4.9397	...	0.0361	0.0271	4.9577	4.9306	0.0451	0.0375
4		3A	0.0000	5.2500	5.2262	...	5.0876	5.0786	0.0090	4.9794	4.9162	4.9433	...	0.0361	0.0271	4.9613	4.9372	0.0451	0.0375
5 $\frac{1}{4}$ – 6 or 5.2500 – 6	UN	2A	0.0032	5.2468	5.2286	...	5.1385	5.1279	0.010587	5.0664	5.0196	5.0423	...	0.0241	0.0180	5.0543	5.0336	0.0301	0.0250
6		3A	0.0000	5.2500	5.2318	...	5.1417	5.1338	0.0079	5.0696	5.0255	5.0455	...	0.0241	0.0180	5.0575	5.0395	0.0301	0.0250
5 $\frac{1}{4}$ – 8 or 5.2500 – 8	UN	2A	0.0029	5.2471	5.2321	...	5.1659	5.1561	0.009794	5.1118	5.0749	5.0937	...	0.0180	0.0135	5.1028	5.0854	0.0226	0.0188
(8) 8		3A	0.0000	5.2500	5.2350	...	5.1688	5.1615	0.0073	5.1147	5.0803	5.0966	...	0.0180	0.0135	5.1057	5.0908	0.0226	0.0188
(8) 5 $\frac{1}{4}$ – 12 or 5.2500 – 12	UN	2A	0.0020	5.2480	5.2366	...	5.1939	5.1871	0.006768	5.1578	5.1330	5.1458	...	0.0120	0.0090	5.1518	5.1400	0.0150	0.0125
(8) 12		3A	0.0000	5.2500	5.2386	...	5.1959	5.1908	0.0051	5.1598	5.1367	5.1478	...	0.0120	0.0090	5.1538	5.1437	0.0150	0.0125
5 $\frac{1}{4}$ – 16 or 5.2500 – 16	UN	2A	0.0018	5.2482	5.2388	...	5.2076	5.2015	0.006094	5.1805	5.1609	5.1715	...	0.0090	0.0068	5.1760	5.1661	0.0113	0.0094
(8) 16		3A	0.0000	5.2500	5.2406	...	5.2094	5.2048	0.0046	5.1823	5.1642	5.1733	...	0.0090	0.0068	5.1778	5.1694	0.0113	0.0094
5 $\frac{3}{8}$ – 4 or 5.3750 – 4	UN	2A	0.0036	5.3714	5.3476	...	5.2090	5.1969	0.012059	5.1008	5.0345	5.0647	...	0.0361	0.0271	5.0827	5.0555	0.0451	0.0375
4		3A	0.0000	5.3750	5.3512	...	5.2126	5.2036	0.0090	5.1044	5.0412	5.0683	...	0.0361	0.0271	5.0863	5.0622	0.0451	0.0375
5 $\frac{3}{8}$ – 6 or 5.3750 – 6	UN	2A	0.0032	5.3718	5.3536	...	5.2635	5.2529	0.010649	5.1914	5.1446	5.1673	...	0.0241	0.0180	5.1793	5.1586	0.0301	0.0250
6		3A	0.0000	5.3750	5.3568	...	5.2667	5.2587	0.0080	5.1946	5.1504	5.1705	...	0.0241	0.0180	5.1825	5.1644	0.0301	0.0250
(8) 5 $\frac{3}{8}$ – 8 or 5.3750 – 8	UN	2A	0.0030	5.3720	5.3570	...	5.2908	5.2809	0.009856	5.2367	5.1997	5.2186	...	0.0180	0.0135	5.2277	5.2102	0.0226	0.0188
(8) 8		3A	0.0000	5.3750	5.3600	...	5.2938	5.2864	0.0074	5.2397	5.2052	5.2216	...	0.0180	0.0135	5.2307	5.2157	0.0226	0.0188
(8) 5 $\frac{3}{8}$ – 12 or 5.3750 – 12	UN	2A	0.0020	5.3730	5.3616	...	5.3189	5.3121	0.006789	5.2828	5.2580	5.2708	...	0.0120	0.0090	5.2768	5.2650	0.0150	0.0125
(8) 12		3A	0.0000	5.3750	5.3636	...	5.3209	5.3158	0.0051	5.2848	5.2617	5.2728	...	0.0120	0.0090	5.2788	5.2687	0.0150	0.0125

Table 2A
Limits of Size for Standard Series External Threads (UN, UNR, and UNJ) (Cont'd)

							Major Diameter, <i>d</i>		Pitch Diameter, <i>d</i> ₂ , and Functional Diameter [Note (4)]		Minor Diameter, <i>d</i> ₁ /Root Radius									
											UN		UNR				UNJ			
											Reference Diameter [Notes (6), (7)]	Reference Diameter [Note (6)]	Radius		Diameter		Radius			
Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Allowance, <i>es</i>	Max. [Note (2)]	Min.	Min. [Note (3)]	Max. [Note (2)]	Min.	Tolerance, <i>T</i> _{<i>d</i>2} [Note (5)]	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
(8) 5 ³ / ₈ – 16 or 5.3750 – 16	UN	2A	0.0018	5.3732	5.3638	...	5.3326	5.3265	0.006115	5.3055	5.2859	5.2965	...	0.0090	0.0068	5.3010	5.2911	0.0113	0.0094	
		3A	0.0000	5.3750	5.3656	...	5.3344	5.3298	0.0046	5.3073	5.2892	5.2983	...	0.0090	0.0068	5.3028	5.2944	0.0113	0.0094	
5 ¹ / ₂ – 4 or 5.5000 – 4	UNC	2A	0.0036	5.4964	5.4726	...	5.3340	5.3219	0.012119	5.2258	5.1595	5.1897	...	0.0361	0.0271	5.2077	5.1805	0.0451	0.0375	
		3A	0.0000	5.5000	5.4762	...	5.3376	5.3285	0.0091	5.2294	5.1661	5.1933	...	0.0361	0.0271	5.2113	5.1871	0.0451	0.0375	
5 ¹ / ₂ – 6 or 5.5000 – 6	UN	2A	0.0032	5.4968	5.4786	...	5.3885	5.3778	0.010709	5.3164	5.2695	5.2923	...	0.0241	0.0180	5.3043	5.2835	0.0301	0.0250	
		3A	0.0000	5.5000	5.4818	...	5.3917	5.3837	0.0080	5.3196	5.2754	5.2955	...	0.0241	0.0180	5.3075	5.2894	0.0301	0.0250	
5 ¹ / ₂ – 8 or 5.5000 – 8	UN	2A	0.0030	5.4970	5.4820	...	5.4158	5.4059	0.009916	5.3617	5.3247	5.3436	...	0.0180	0.0135	5.3527	5.3352	0.0226	0.0188	
		3A	0.0000	5.5000	5.4850	...	5.4188	5.4114	0.0074	5.3647	5.3302	5.3466	...	0.0180	0.0135	5.3557	5.3407	0.0226	0.0188	
(8) 5 ¹ / ₂ – 12 or 5.5000 – 12	UN	2A	0.0020	5.4980	5.4866	...	5.4439	5.4371	0.006809	5.4078	5.3830	5.3958	...	0.0120	0.0090	5.4018	5.3900	0.0150	0.0125	
		3A	0.0000	5.5000	5.4886	...	5.4459	5.4408	0.0051	5.4098	5.3867	5.3978	...	0.0120	0.0090	5.4038	5.3937	0.0150	0.0125	
(8) 5 ¹ / ₂ – 16 or 5.5000 – 16	UN	2A	0.0018	5.4982	5.4888	...	5.4576	5.4515	0.006135	5.4305	5.4109	5.4215	...	0.0090	0.0068	5.4260	5.4161	0.0113	0.0094	
		3A	0.0000	5.5000	5.4906	...	5.4594	5.4548	0.0046	5.4323	5.4142	5.4233	...	0.0090	0.0068	5.4278	5.4194	0.0113	0.0094	
5 ⁵ / ₈ – 4 or 5.6250 – 4	UN	2A	0.0037	5.6213	5.5975	...	5.4589	5.4467	0.012179	5.3507	5.2843	5.3146	...	0.0361	0.0271	5.3326	5.3053	0.0451	0.0375	
		3A	0.0000	5.6250	5.6012	...	5.4626	5.4535	0.0091	5.3544	5.2911	5.3183	...	0.0361	0.0271	5.3363	5.3121	0.0451	0.0375	
5 ⁵ / ₈ – 6 or 5.6250 – 6	UN	2A	0.0032	5.6218	5.6036	...	5.5135	5.5027	0.010769	5.4414	5.3944	5.4173	...	0.0241	0.0180	5.4293	5.4084	0.0301	0.0250	
		3A	0.0000	5.6250	5.6068	...	5.5167	5.5086	0.0081	5.4446	5.4003	5.4205	...	0.0241	0.0180	5.4325	5.4143	0.0301	0.0250	
(8) 5 ⁵ / ₈ – 8 or 5.6250 – 8	UN	2A	0.0030	5.6220	5.6070	...	5.5408	5.5308	0.009976	5.4867	5.4496	5.4686	...	0.0180	0.0135	5.4777	5.4601	0.0226	0.0188	
		3A	0.0000	5.6250	5.6100	...	5.5438	5.5363	0.0075	5.4897	5.4551	5.4716	...	0.0180	0.0135	5.4807	5.4656	0.0226	0.0188	
(8) 5 ⁵ / ₈ – 12 or 5.6250 – 12	UN	2A	0.0020	5.6230	5.6116	...	5.5689	5.5621	0.006829	5.5328	5.5080	5.5208	...	0.0120	0.0090	5.5268	5.5150	0.0150	0.0125	
		3A	0.0000	5.6250	5.6136	...	5.5709	5.5658	0.0051	5.5348	5.5117	5.5228	...	0.0120	0.0090	5.5288	5.5187	0.0150	0.0125	
(8) 5 ⁵ / ₈ – 16 or 5.6250 – 16	UN	2A	0.0018	5.6232	5.6138	...	5.5826	5.5764	0.006155	5.5555	5.5358	5.5465	...	0.0090	0.0068	5.5510	5.5410	0.0113	0.0094	
		3A	0.0000	5.6250	5.6156	...	5.5844	5.5798	0.0046	5.5573	5.5392	5.5483	...	0.0090	0.0068	5.5528	5.5444	0.0113	0.0094	
5 ³ / ₄ – 4 or 5.7500 – 4	UNC	2A	0.0037	5.7463	5.7225	...	5.5839	5.5717	0.012237	5.4757	5.4093	5.4396	...	0.0361	0.0271	5.4576	5.4303	0.0451	0.0375	
		3A	0.0000	5.7500	5.7262	...	5.5876	5.5784	0.0092	5.4794	5.4160	5.4433	...	0.0361	0.0271	5.4613	5.4370	0.0451	0.0375	
5 ³ / ₄ – 6 or 5.7500 – 6	UN	2A	0.0032	5.7468	5.7286	...	5.6385	5.6277	0.010827	5.5664	5.5194	5.5423	...	0.0241	0.0180	5.5543	5.5334	0.0301	0.0250	
		3A	0.0000	5.7500	5.7318	...	5.6417	5.6336	0.0081	5.5696	5.5253	5.5455	...	0.0241	0.0180	5.5575	5.5393	0.0301	0.0250	

Table 2A
Limits of Size for Standard Series External Threads (UN, UNR, and UNJ) (Cont'd)

	Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Allowance, <i>es</i>	Major Diameter, <i>d</i>			Pitch Diameter, <i>d</i> ₂ , and Functional Diameter [Note (4)]			Minor Diameter, <i>d</i> ₁ /Root Radius									
											UN		UNR				UNJ			
											Reference Diameter [Notes (6), (7)]		Reference Diameter [Note (6)]		Radius		Diameter		Radius	
											Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.
	1	2	3	4	Max. [Note (2)]	Min.	Min. [Note (3)]	Max. [Note (2)]	Min.	Tolerance, <i>Td</i> ₂ [Note (5)]	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.
(8)	5 ³ / ₄ – 8 or 5.7500 – 8	UN	2A	0.0030	5.7470	5.7320	...	5.6658	5.6558	0.010034	5.6117	5.5746	5.5936	...	0.0180	0.0135	5.6027	5.5851	0.0226	0.0188
	8		3A	0.0000	5.7500	5.7350	...	5.6688	5.6613	0.0075	5.6147	5.5801	5.5966	...	0.0180	0.0135	5.6057	5.5906	0.0226	0.0188
(8)	5 ³ / ₄ – 12 or 5.7500 – 12	UN	2A	0.0021	5.7479	5.7365	...	5.6938	5.6870	0.006848	5.6577	5.6329	5.6457	...	0.0120	0.0090	5.6517	5.6399	0.0150	0.0125
(8)	12		3A	0.0000	5.7500	5.7386	...	5.6959	5.6908	0.0051	5.6598	5.6367	5.6478	...	0.0120	0.0090	5.6538	5.6437	0.0150	0.0125
(8)	5 ³ / ₄ – 16 or 5.7500 – 16	UN	2A	0.0019	5.7481	5.7387	...	5.7075	5.7013	0.006174	5.6804	5.6607	5.6714	...	0.0090	0.0068	5.6759	5.6659	0.0113	0.0094
(8)	16		3A	0.0000	5.7500	5.7406	...	5.7094	5.7048	0.0046	5.6823	5.6642	5.6733	...	0.0090	0.0068	5.6778	5.6694	0.0113	0.0094
	5 ⁷ / ₈ – 4 or 5.8750 – 4	UN	2A	0.0037	5.8713	5.8475	...	5.7089	5.6966	0.012296	5.6007	5.5342	5.5646	...	0.0361	0.0271	5.5826	5.5552	0.0451	0.0375
	4		3A	0.0000	5.8750	5.8512	...	5.7126	5.7034	0.0092	5.6044	5.5410	5.5683	...	0.0361	0.0271	5.5863	5.5620	0.0451	0.0375
	5 ⁷ / ₈ – 6 or 5.8750 – 6	UN	2A	0.0033	5.8717	5.8535	...	5.7634	5.7525	0.010886	5.6913	5.6442	5.6672	...	0.0241	0.0180	5.6792	5.6582	0.0301	0.0250
	6		3A	0.0000	5.8750	5.8568	...	5.7667	5.7585	0.0082	5.6946	5.6502	5.6705	...	0.0241	0.0180	5.6825	5.6642	0.0301	0.0250
(8)	5 ⁷ / ₈ – 8 or 5.8750 – 8	UN	2A	0.0030	5.8720	5.8570	...	5.7908	5.7807	0.010093	5.7367	5.6995	5.7186	...	0.0180	0.0135	5.7277	5.7100	0.0226	0.0188
	8		3A	0.0000	5.8750	5.8600	...	5.7938	5.7862	0.0076	5.7397	5.7050	5.7216	...	0.0180	0.0135	5.7307	5.7155	0.0226	0.0188
(8)	5 ⁷ / ₈ – 12 or 5.8750 – 12	UN	2A	0.0021	5.8729	5.8615	...	5.8188	5.8119	0.006868	5.7827	5.7578	5.7707	...	0.0120	0.0090	5.7767	5.7648	0.0150	0.0125
	12		3A	0.0000	5.8750	5.8636	...	5.8209	5.8157	0.0052	5.7848	5.7616	5.7728	...	0.0120	0.0090	5.7788	5.7686	0.0150	0.0125
	5 ⁷ / ₈ – 16 or 5.8750 – 16	UN	2A	0.0019	5.8731	5.8637	...	5.8325	5.8263	0.006194	5.8054	5.7857	5.7964	...	0.0090	0.0068	5.8009	5.7909	0.0113	0.0094
(8)	16		3A	0.0000	5.8750	5.8656	...	5.8344	5.8298	0.0046	5.8073	5.7892	5.7893	...	0.0090	0.0068	5.8028	5.7944	0.0113	0.0094
	6 – 4 or 6.0000 – 4	UN	2A	0.0037	5.9963	5.9725	...	5.8339	5.8215	0.012353	5.7257	5.6591	5.6896	...	0.0361	0.0271	5.7076	5.6801	0.0451	0.0375
	4		3A	0.0000	6.0000	5.9762	...	5.8376	5.8283	0.0093	5.7294	5.6659	5.6933	...	0.0361	0.0271	5.7113	5.6869	0.0451	0.0375
	6 – 6 or 6.0000 – 6	UN	2A	0.0033	5.9967	5.9785	...	5.8884	5.8775	0.010943	5.8163	5.7692	5.7922	...	0.0241	0.0180	5.8042	5.7832	0.0301	0.0250
	6		3A	0.0000	6.0000	5.9818	...	5.8917	5.8835	0.0082	5.8196	5.7752	5.7955	...	0.0241	0.0180	5.8075	5.7892	0.0301	0.0250
(8)	6 – 8 or 6.0000 – 8	UN	2A	0.0030	5.9970	5.9820	...	5.9158	5.9056	0.010150	5.8617	5.8245	5.8436	...	0.0180	0.0135	5.8527	5.8350	0.0226	0.0188
(8)	8		3A	0.0000	6.0000	5.9850	...	5.9188	5.9112	0.007600	5.8647	5.8300	5.8466	...	0.0180	0.0135	5.8557	5.8405	0.0226	0.0188
	6 – 12 or 6.0000 – 12	UN	2A	0.0021	5.9979	5.9865	...	5.9438	5.9369	0.006887	5.9077	5.8828	5.8957	...	0.0120	0.0090	5.9017	5.8898	0.0150	0.0125
	12		3A	0.0000	6.0000	5.9886	...	5.9459	5.9407	0.0052	5.9098	5.8866	5.8978	...	0.0120	0.0090	5.9038	5.8936	0.0150	0.0125
	6 – 16 or 6.0000 – 16	UN	2A	0.0019	5.9981	5.9887	...	5.9575	5.9513	0.006213	5.9304	5.9107	5.9214	...	0.0090	0.0068	5.9259	5.9159	0.0113	0.0094
(8)	16		3A	0.0000	6.0000	5.9906	...	5.9594	5.9547	0.0047	5.9323	5.9141	5.9233	...	0.0090	0.0068	5.9278	5.9193	0.0113	0.0094

Table 2A
Limits of Size for Standard Series External Threads (UN, UNR, and UNJ) (Cont'd)

- GENERAL NOTES:
- (a) Series designation shown in column 2 indicates the UN thread form; however, the UNR or UNJ thread form may be specified by substituting UNR or UNJ in place of UN in all designations.
 - (b) Thread classes may be combined. See [para. 4.1](#).
- NOTES:
- (1) There is no Class 1A for the UNJ thread series.
 - (2) For Class 2A threads having an additive finish, the maximum major, d max., and pitch, d_2 max., diameters after coating may equal the basic sizes whose values are the same as maximum values shown for Class 3A in these columns. See [para. 4.1.2](#).
 - (3) The minimum shown is for unfinished hot material, not including standard fasteners with rolled threads.
 - (4) See [para. 5.2.1](#) for functional diameter.
 - (5) The 2A pitch diameter tolerance, Td_2 , is used as a six-place decimal to calculate the Class 1A/1B, 2B, and 3A/3B tolerances; Class 1A/2A allowances; and all other dimensional limits that depend on them. The tolerance is rounded to four places when used for calculating the 2A minimum pitch diameter.
 - (6) These values are for reference only. The minimum minor diameter, d_1 min., is not normally specified. See [paras. 5.4, 8.3.1\(e\), and 8.3.1\(f\)](#).
 - (7) UN threads are allowed to have a rounded root contour but there is no root radius required. See [para 2.3.1](#).
 - (8) One or more of the numbers listed in this row have been changed to correct for calculation and rounding errors. The original numbers from past issues of this Standard are listed in [Nonmandatory Appendix E](#) and are for reference only.
 - (9) Formerly NF; tolerances and allowances are based on 1 diameter length of engagement.

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ)

Nominal Size and Threads/in.			Major Diameter, <i>D</i>		Pitch Diameter, <i>D</i> ₂ , and Functional Diameter [Note (3)]			Minor Diameter, <i>D</i> ₁					
			Min.	Max. [Note (2)]	Min.	Max.	Tolerance, <i>TD</i> ₂	UN [Note (4)]		UNR [Note (5)]		UNJ	
								Min.	Max.	Min.	Max.	Min.	Max.
1	2	3	4	5	6	7	8	9	10	11	12	13	14
0 – 80 or 0.0600 – 80	UNF	2B	0.0600	...	0.0519	0.0542	0.0023	0.0465	0.0514	...	...	0.0478	0.0510
		3B	0.0600	...	0.0519	0.0536	0.0017	0.0465	0.0514	...	...	0.0478	0.0510
(6) (6) 1 – 64 or 0.0730 – 64	UNC	2B	0.0730	...	0.0629	0.0655	0.0026	0.0561	0.0623	...	...	0.0578	0.0619
		3B	0.0730	...	0.0629	0.0648	0.0019	0.0561	0.0623	...	...	0.0578	0.0619
(6) (6) 1 – 72 or 0.0730 – 72	UNF	2B	0.0730	...	0.0640	0.0665	0.0025	0.0580	0.0635	...	...	0.0595	0.0631
		3B	0.0730	...	0.0640	0.0659	0.0019	0.0580	0.0635	...	...	0.0595	0.0631
2 – 56 or 0.0860 – 56	UNC	2B	0.0860	...	0.0744	0.0772	0.0028	0.0667	0.0737	...	...	0.0686	0.0732
		3B	0.0860	...	0.0744	0.0765	0.0021	0.0667	0.0737	...	...	0.0686	0.0732
(6) (6) 2 – 64 or 0.0860 – 64	UNF	2B	0.0860	...	0.0759	0.0786	0.0027	0.0691	0.0753	...	...	0.0708	0.0749
		3B	0.0860	...	0.0759	0.0779	0.0020	0.0691	0.0753	...	...	0.0708	0.0749
3 – 48 or 0.0990 – 48	UNC	2B	0.0990	...	0.0855	0.0885	0.0030	0.0764	0.0845	...	...	0.0787	0.0841
		3B	0.0990	...	0.0855	0.0877	0.0022	0.0764	0.0845	...	...	0.0787	0.0841
3 – 56 or 0.0990 – 56	UNF	2B	0.0990	...	0.0874	0.0902	0.0028	0.0797	0.0865	...	...	0.0816	0.0862
		3B	0.0990	...	0.0874	0.0895	0.0021	0.0797	0.0865	...	...	0.0816	0.0862
4 – 40 or 0.1120 – 40	UNC	2B	0.1120	...	0.0958	0.0991	0.0033	0.0849	0.0939	...	...	0.0876	0.0941
		3B	0.1120	...	0.0958	0.0982	0.0024	0.0849	0.0939	...	...	0.0876	0.0941
4 – 48 or 0.1120 – 48	UNF	2B	0.1120	...	0.0985	0.1016	0.0031	0.0894	0.0968	...	...	0.0917	0.0971
		3B	0.1120	...	0.0985	0.1008	0.0023	0.0894	0.0968	...	...	0.0917	0.0971
5 – 40 or 0.1250 – 40	UNC	2B	0.1250	...	0.1088	0.1121	0.0033	0.0979	0.1062	...	...	0.1006	0.1071
		3B	0.1250	...	0.1088	0.1113	0.0025	0.0979	0.1062	...	...	0.1006	0.1071
5 – 44 or 0.1250 – 44	UNF	2B	0.1250	...	0.1102	0.1134	0.0032	0.1004	0.1079	...	...	0.1029	0.1088
		3B	0.1250	...	0.1102	0.1126	0.0024	0.1004	0.1079	...	...	0.1029	0.1088
(6) 6 – 32 or 0.1380 – 32	UNC	2B	0.1380	...	0.1177	0.1214	0.0037	0.104	0.114	...	...	0.108	0.116
		3B	0.1380	...	0.1177	0.1204	0.0027	0.1040	0.1140	...	...	0.1076	0.1157

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Major Diameter, <i>D</i>		Pitch Diameter, <i>D</i> ₂ , and Functional Diameter [Note (3)]			Minor Diameter, <i>D</i> ₁					
			Min.	Max. [Note (2)]	Min.	Max.	Tolerance, <i>TD</i> ₂	UN [Note (4)]		UNR [Note (5)]		UNJ	
								Min.	Max.	Min.	Max.	Min.	Max.
1	2	3	4	5	6	7	8	9	10	11	12	13	14
(6) 6 – 40 or 0.1380 – 40	UNF	2B	0.1380	...	0.1218	0.1252	0.0034	0.111	0.119	...	...	0.114	0.120
		3B	0.1380	...	0.1218	0.1243	0.0025	0.1110	0.1186	...	...	0.1136	0.1201
	UNC	2B	0.1640	...	0.1437	0.1475	0.0038	0.130	0.139	...	...	0.134	0.142
		3B	0.1640	...	0.1437	0.1465	0.0028	0.1300	0.1389	...	...	0.1336	0.1417
(6) 8 – 36 or 0.1640 – 36	UNF	2B	0.1640	...	0.1460	0.1496	0.0036	0.134	0.142	...	...	0.137	0.144
		3B	0.1640	...	0.1460	0.1487	0.0027	0.1340	0.1416	...	...	0.1369	0.1441
	UNC	2B	0.1900	...	0.1629	0.1672	0.0043	0.145	0.155	...	...	0.149	0.160
		3B	0.1900	...	0.1629	0.1661	0.0032	0.1450	0.1555	...	...	0.1494	0.1600
(6) 10 – 32 or 0.1900 – 32	UNF	2B	0.1900	...	0.1697	0.1736	0.0039	0.156	0.164	...	...	0.160	0.167
		3B	0.1900	...	0.1697	0.1726	0.0029	0.1560	0.1641	...	...	0.1596	0.1675
	UNC	2B	0.2160	...	0.1889	0.1933	0.0044	0.171	0.181	...	...	0.175	0.185
		3B	0.2160	...	0.1889	0.1922	0.0033	0.1710	0.1807	...	...	0.1754	0.1852
(6) 12 – 28 or 0.2160 – 28	UNF	2B	0.2160	...	0.1928	0.1970	0.0042	0.177	0.186	...	...	0.181	0.190
		3B	0.2160	...	0.1928	0.1959	0.0031	0.1770	0.1857	...	...	0.1812	0.1896
	UNEF	2B	0.2160	...	0.1957	0.1998	0.0041	0.182	0.190	...	...	0.186	0.193
		3B	0.2160	...	0.1957	0.1988	0.0031	0.1820	0.1895	...	...	0.1856	0.1929
1/4 – 20 or 0.2500 – 20	UNC	1B	0.2500	...	0.2175	0.2248	0.0073	0.196	0.207	...	...	...	...
		2B	0.2500	...	0.2175	0.2224	0.0049	0.196	0.207	...	...	0.201	0.212
		3B	0.2500	...	0.2175	0.2211	0.0036	0.1960	0.2067	...	...	0.2013	0.2121
1/4 – 28 or 0.2500 – 28	UNF	1B	0.2500	...	0.2268	0.2333	0.0065	0.211	0.220	...	...	...	...
		2B	0.2500	...	0.2268	0.2311	0.0043	0.211	0.220	...	...	0.215	0.223
		3B	0.2500	...	0.2268	0.2300	0.0032	0.2110	0.2190	...	...	0.2152	0.2229

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

Nominal Size and Threads/in.			Major Diameter, <i>D</i>		Pitch Diameter, <i>D</i> ₂ , and Functional Diameter [Note (3)]			Minor Diameter, <i>D</i> ₁					
			Min.	Max. [Note (2)]	Min.	Max.	Tolerance, <i>TD</i> ₂	UN [Note (4)]		UNR [Note (5)]		UNJ	
								Min.	Max.	Min.	Max.	Min.	Max.
1	2	3	4	5	6	7	8	9	10	11	12	13	14
1/4 – 32 or 0.2500 – 32	UNEF	2B	0.2500	...	0.2297	0.2339	0.0042	0.216	0.224	...	...	0.220	0.226
		3B	0.2500	...	0.2297	0.2328	0.0031	0.2160	0.2229	...	...	0.2196	0.2263
5/16 – 18 or 0.3125 – 18	UNC	1B	0.3125	...	0.2764	0.2843	0.0079	0.252	0.265	...	...	...	...
		2B	0.3125	...	0.2764	0.2817	0.0053	0.252	0.265	...	...	0.258	0.269
		3B	0.3125	...	0.2764	0.2803	0.0039	0.2520	0.2630	...	...	0.2584	0.2690
(6) 5/16 – 20 or 0.3125 – 20	UN	2B	0.3125	...	0.2800	0.2853	0.0053	0.258	0.270	...	...	0.264	0.273
		3B	0.3125	...	0.2800	0.2840	0.0040	0.2580	0.2680	...	...	0.2638	0.2734
5/16 – 24 or 0.3125 – 24	UNF	1B	0.3125	...	0.2854	0.2925	0.0071	0.267	0.277	...	...	...	...
		2B	0.3125	...	0.2854	0.2902	0.0048	0.267	0.277	...	...	0.272	0.280
		3B	0.3125	...	0.2854	0.2890	0.0036	0.2670	0.2754	...	...	0.2719	0.2799
(6) 5/16 – 28 or 0.3125 – 28	UN	2B	0.3125	...	0.2893	0.2938	0.0045	0.274	0.282	...	...	0.278	0.285
		3B	0.3125	...	0.2893	0.2927	0.0034	0.2740	0.2807	...	...	0.2777	0.2846
(6) 5/16 – 32 or 0.3125 – 32	UNEF	2B	0.3125	...	0.2922	0.2965	0.0043	0.279	0.286	...	...	0.282	0.288
		3B	0.3125	...	0.2922	0.2954	0.0032	0.2790	0.2847	...	...	0.2821	0.2881
3/8 – 16 or 0.3750 – 16	UNC	1B	0.3750	...	0.3344	0.3429	0.0085	0.307	0.321	...	...	...	...
		2B	0.3750	...	0.3344	0.3401	0.0057	0.307	0.321	...	...	0.314	0.325
		3B	0.3750	...	0.3344	0.3387	0.0043	0.3070	0.3182	...	...	0.3141	0.3250
3/8 – 20 or 0.3750 – 20	UN	2B	0.3750	...	0.3425	0.3479	0.0054	0.321	0.332	...	...	0.326	0.335
		3B	0.3750	...	0.3425	0.3465	0.0040	0.3210	0.3297	...	...	0.3263	0.3351
3/8 – 24 or 0.3750 – 24	UNF	1B	0.3750	...	0.3479	0.3553	0.0074	0.330	0.340	...	...	...	...
		2B	0.3750	...	0.3479	0.3528	0.0049	0.330	0.340	...	...	0.334	0.342
		3B	0.3750	...	0.3479	0.3516	0.0037	0.3300	0.3372	...	...	0.3344	0.3417
3/8 – 28 or 0.3750 – 28	UN	2B	0.3750	...	0.3518	0.3564	0.0046	0.336	0.345	...	...	0.340	0.347
		3B	0.3750	...	0.3518	0.3553	0.0035	0.3360	0.3426	...	...	0.3402	0.3465

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

Nominal Size and Threads/in.			Major Diameter, <i>D</i>		Pitch Diameter, <i>D</i> ₂ , and Functional Diameter [Note (3)]			Minor Diameter, <i>D</i> ₁					
			Min.	Max. [Note (2)]	Min.	Max.	Tolerance, <i>TD</i> ₂	UN [Note (4)]		UNR [Note (5)]		UNJ	
								Min.	Max.	Min.	Max.	Min.	Max.
1	2	3	4	5	6	7	8	9	10	11	12	13	14
$\frac{3}{8}$ – 32 or 0.3750 – 32	UNEF	2B	0.3750	...	0.3547	0.3591	0.0044	0.341	0.349	...	...	0.345	0.350
		3B	0.3750	...	0.3547	0.3580	0.0033	0.3410	0.3469	...	...	0.3446	0.3501
$\frac{7}{16}$ – 14 or 0.4375 – 14	UNC	1B	0.4375	...	0.3911	0.4003	0.0092	0.360	0.376	...	...	...	...
		2B	0.4375	...	0.3911	0.3972	0.0061	0.360	0.376	...	...	0.368	0.379
		3B	0.4375	...	0.3911	0.3957	0.0046	0.3600	0.3717	...	...	0.3679	0.3794
(6) $\frac{7}{16}$ – 16 or 0.4375 – 16	UN	2B	0.4375	...	0.3969	0.4029	0.0060	0.370	0.384	...	...	0.377	0.387
		3B	0.4375	...	0.3969	0.4014	0.0045	0.3700	0.3800	...	...	0.3766	0.3868
(6) $\frac{7}{16}$ – 20 or 0.4375 – 20	UNF	1B	0.4375	...	0.4050	0.4131	0.0081	0.383	0.395	...	...	...	...
		2B	0.4375	...	0.4050	0.4104	0.0054	0.383	0.395	...	...	0.389	0.397
		3B	0.4375	...	0.4050	0.4091	0.0041	0.3830	0.3916	...	...	0.3888	0.3970
(6) $\frac{7}{16}$ – 28 or 0.4375 – 28	UNEF	2B	0.4375	...	0.4143	0.4190	0.0047	0.399	0.407	...	...	0.403	0.409
		3B	0.4375	...	0.4143	0.4178	0.0035	0.3990	0.4051	...	...	0.4027	0.4086
(6) $\frac{7}{16}$ – 32 or 0.4375 – 32	UN	2B	0.4375	...	0.4172	0.4216	0.0044	0.404	0.411	...	...	0.407	0.412
		3B	0.4375	...	0.4172	0.4205	0.0033	0.4040	0.4094	...	...	0.4071	0.4122
$\frac{1}{2}$ – 13 or 0.5000 – 13	UNC	1B	0.5000	...	0.4500	0.4597	0.0097	0.417	0.434	...	...	...	...
		2B	0.5000	...	0.4500	0.4565	0.0065	0.417	0.434	...	...	0.425	0.437
		3B	0.5000	...	0.4500	0.4548	0.0048	0.4170	0.4284	...	...	0.4251	0.4368
(6) $\frac{1}{2}$ – 16 or 0.5000 – 16	UN	2B	0.5000	...	0.4594	0.4655	0.0061	0.432	0.446	...	...	0.439	0.449
		3B	0.5000	...	0.4594	0.4640	0.0046	0.4320	0.4419	...	...	0.4391	0.4487
$\frac{1}{2}$ – 20 or 0.5000 – 20	UNF	1B	0.5000	...	0.4675	0.4759	0.0084	0.446	0.457	...	...	...	...
		2B	0.5000	...	0.4675	0.4731	0.0056	0.446	0.457	...	...	0.451	0.459
		3B	0.5000	...	0.4675	0.4717	0.0042	0.4460	0.4537	...	...	0.4513	0.4591
$\frac{1}{2}$ – 28 or 0.5000 – 28	UNEF	2B	0.5000	...	0.4768	0.4816	0.0048	0.461	0.470	...	...	0.465	0.471
		3B	0.5000	...	0.4768	0.4804	0.0036	0.4610	0.4676	...	...	0.4652	0.4708

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Major Diameter, <i>D</i>		Pitch Diameter, <i>D</i> ₂ , and Functional Diameter [Note (3)]			Minor Diameter, <i>D</i> ₁					
			Min.	Max. [Note (2)]	Min.	Max.	Tolerance, <i>TD</i> ₂	UN [Note (4)]		UNR [Note (5)]		UNJ	
								Min.	Max.	Min.	Max.	Min.	Max.
1	2	3	4	5	6	7	8	9	10	11	12	13	14
½ – 32 or 0.5000 – 32	UN	2B	0.5000	...	0.4797	0.4842	0.0045	0.466	0.474	...	...	0.470	0.474
		3B	0.5000	...	0.4797	0.4831	0.0034	0.4660	0.4719	...	...	0.4696	0.4744
⅜ – 12 or 0.5625 – 12	UNC	1B	0.5625	...	0.5084	0.5186	0.0102	0.472	0.490	...	...	...	...
		2B	0.5625	...	0.5084	0.5152	0.0068	0.472	0.490	...	...	0.481	0.491
		3B	0.5625	...	0.5084	0.5135	0.0051	0.4720	0.4843	...	...	0.4813	0.4913
⅜ – 16 or 0.5625 – 16	UN	2B	0.5625	...	0.5219	0.5280	0.0061	0.495	0.509	...	...	0.502	0.511
		3B	0.5625	...	0.5219	0.5265	0.0046	0.4950	0.5040	...	...	0.5016	0.5108
⅜ – 18 or 0.5625 – 18	UNF	1B	0.5625	...	0.5264	0.5353	0.0089	0.502	0.515	...	...	...	...
		2B	0.5625	...	0.5264	0.5323	0.0059	0.502	0.515	...	...	0.508	0.517
		3B	0.5625	...	0.5264	0.5308	0.0044	0.5020	0.5106	...	...	0.5084	0.5166
⅜ – 20 or 0.5625 – 20	UN	2B	0.5625	...	0.5300	0.5356	0.0056	0.508	0.520	...	...	0.514	0.521
		3B	0.5625	...	0.5300	0.5342	0.0042	0.5080	0.5162	...	...	0.5138	0.5213
⅜ – 24 or 0.5625 – 24	UNEF	2B	0.5625	...	0.5354	0.5405	0.0051	0.517	0.527	...	...	0.522	0.528
		3B	0.5625	...	0.5354	0.5393	0.0039	0.5170	0.5244	...	...	0.5219	0.5281
⅜ – 28 or 0.5625 – 28	UN	2B	0.5625	...	0.5393	0.5441	0.0048	0.524	0.532	...	...	0.528	0.533
		3B	0.5625	...	0.5393	0.5429	0.0036	0.5240	0.5301	...	...	0.5277	0.5330
⅜ – 32 or 0.5625 – 32	UN	2B	0.5625	...	0.5422	0.5468	0.0046	0.529	0.536	...	...	0.532	0.537
		3B	0.5625	...	0.5422	0.5456	0.0034	0.5290	0.5344	...	...	0.5321	0.5367
⅝ – 11 or 0.6250 – 11	UNC	1B	0.6250	...	0.5660	0.5767	0.0107	0.527	0.546	...	...	...	...
		2B	0.6250	...	0.5660	0.5732	0.0072	0.527	0.546	...	...	0.536	0.547
		3B	0.6250	...	0.5660	0.5714	0.0054	0.5270	0.5391	...	...	0.5364	0.5473
⅝ – 12 or 0.6250 – 12	UN	2B	0.6250	...	0.5709	0.5780	0.0071	0.535	0.553	...	...	0.544	0.554
		3B	0.6250	...	0.5709	0.5762	0.0053	0.5350	0.5463	...	...	0.5438	0.5538

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

Nominal Size and Threads/in.			Major Diameter, <i>D</i>		Pitch Diameter, <i>D</i> ₂ , and Functional Diameter [Note (3)]			Minor Diameter, <i>D</i> ₁					
			Min.	Max. [Note (2)]	Min.	Max.	Tolerance, <i>TD</i> ₂	UN [Note (4)]		UNR [Note (5)]		UNJ	
								Min.	Max.	Min.	Max.	Min.	Max.
1	2	3	4	5	6	7	8	9	10	11	12	13	14
⁵ / ₈ – 16 or 0.6250 – 16	UN	2B	0.6250	...	0.5844	0.5906	0.0062	0.557	0.571	...	...	0.564	0.573
		3B	0.6250	...	0.5844	0.5890	0.0046	0.5570	0.5662	...	...	0.5641	0.5730
⁵ / ₈ – 18 or 0.6250 – 18	UNF	1B	0.6250	...	0.5889	0.5980	0.0091	0.565	0.578	...	...	...	...
		2B	0.6250	...	0.5889	0.5949	0.0060	0.565	0.578	...	...	0.571	0.579
		3B	0.6250	...	0.5889	0.5934	0.0045	0.5650	0.5730	...	...	0.5709	0.5788
⁵ / ₈ – 20 or 0.6250 – 20	UN	2B	0.6250	...	0.5925	0.5981	0.0056	0.571	0.582	...	...	0.576	0.583
		3B	0.6250	...	0.5925	0.5967	0.0042	0.5710	0.5787	...	...	0.5763	0.5835
⁵ / ₈ – 24 or 0.6250 – 24	UNEF	2B	0.6250	...	0.5979	0.6031	0.0052	0.580	0.590	...	...	0.584	0.590
		3B	0.6250	...	0.5979	0.6018	0.0039	0.5800	0.5869	...	...	0.5844	0.5904
⁵ / ₈ – 28 or 0.6250 – 28	UN	2B	0.6250	...	0.6018	0.6067	0.0049	0.586	0.595	...	...	0.590	0.595
		3B	0.6250	...	0.6018	0.6055	0.0037	0.5860	0.5926	...	...	0.5902	0.5953
⁵ / ₈ – 32 or 0.6250 – 32	UN	2B	0.6250	...	0.6047	0.6093	0.0046	0.591	0.599	...	...	0.595	0.599
		3B	0.6250	...	0.6047	0.6082	0.0035	0.5910	0.5969	...	...	0.5946	0.5991
(6) ¹¹ / ₁₆ – 12 or 0.6875 – 12	UN	2B	0.6875	...	0.6334	0.6405	0.0071	0.597	0.615	...	...	0.606	0.616
		3B	0.6875	...	0.6334	0.6387	0.0053	0.5970	0.6085	...	...	0.6063	0.6163
(6) ¹¹ / ₁₆ – 16 or 0.6875 – 16	UN	2B	0.6875	...	0.6469	0.6532	0.0063	0.620	0.634	...	...	0.627	0.635
		3B	0.6875	...	0.6469	0.6516	0.0047	0.6200	0.6284	...	...	0.6266	0.6352
(6) ¹¹ / ₁₆ – 20 or 0.6875 – 20	UN	2B	0.6875	...	0.6550	0.6607	0.0057	0.633	0.645	...	...	0.639	0.646
		3B	0.6875	...	0.6550	0.6593	0.0043	0.6330	0.6412	...	...	0.6388	0.6458
(6) ¹¹ / ₁₆ – 24 or 0.6875 – 24	UNEF	2B	0.6875	...	0.6604	0.6657	0.0053	0.642	0.652	...	...	0.647	0.653
		3B	0.6875	...	0.6604	0.6643	0.0039	0.6420	0.6494	...	...	0.6469	0.6527

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

Nominal Size and Threads/in.			Major Diameter, <i>D</i>		Pitch Diameter, <i>D</i> ₂ , and Functional Diameter [Note (3)]			Minor Diameter, <i>D</i> ₁					
			Min.	Max. [Note (2)]	Min.	Max.	Tolerance, <i>TD</i> ₂	UN [Note (4)]		UNR [Note (5)]		UNJ	
								Min.	Max.	Min.	Max.	Min.	Max.
1	2	3	4	5	6	7	8	9	10	11	12	13	14
(6) ¹¹ / ₁₆ – 28 or 0.6875 – 28	UN	2B	0.6875	...	0.6643	0.6692	0.0049	0.649	0.657	...	...	0.653	0.658
	28	3B	0.6875	...	0.6643	0.6680	0.0037	0.6490	0.6551	...	...	0.6527	0.6577
(6) ¹¹ / ₁₆ – 32 or 0.6875 – 32	UN	2B	0.6875	...	0.6672	0.6719	0.0047	0.654	0.661	...	...	0.657	0.661
	32	3B	0.6875	...	0.6672	0.6707	0.0035	0.6540	0.6594	...	...	0.6571	0.6614
³ / ₄ – 10 or 0.7500 – 10	UNC	1B	0.7500	...	0.6850	0.6965	0.0115	0.642	0.663	...	...	...	...
	10	2B	0.7500	...	0.6850	0.6927	0.0077	0.642	0.663	...	...	0.653	0.665
	10	3B	0.7500	...	0.6850	0.6907	0.0057	0.6420	0.6545	...	...	0.6526	0.6646
³ / ₄ – 12 or 0.7500 – 12	UN	2B	0.7500	...	0.6959	0.7031	0.0072	0.660	0.678	...	...	0.669	0.679
	12	3B	0.7500	...	0.6959	0.7013	0.0054	0.6600	0.6707	...	...	0.6688	0.6788
(6) ³ / ₄ – 16 or 0.7500 – 16	UNF	1B	0.7500	...	0.7094	0.7192	0.0098	0.682	0.696	...	...	...	...
	16	2B	0.7500	...	0.7094	0.7159	0.0065	0.682	0.696	...	...	0.689	0.698
	16	3B	0.7500	...	0.7094	0.7143	0.0049	0.6820	0.6908	...	...	0.6891	0.6976
³ / ₄ – 20 or 0.7500 – 20	UNEF	2B	0.7500	...	0.7175	0.7232	0.0057	0.696	0.707	...	...	0.701	0.708
	20	3B	0.7500	...	0.7175	0.7218	0.0043	0.6960	0.7037	...	...	0.7013	0.7081
(6) ³ / ₄ – 28 or 0.7500 – 28	UN	2B	0.7500	...	0.7268	0.7318	0.0050	0.711	0.720	...	...	0.715	0.720
	28	3B	0.7500	...	0.7268	0.7305	0.0037	0.7110	0.7176	...	...	0.7152	0.7201
³ / ₄ – 32 or 0.7500 – 32	UN	2B	0.7500	...	0.7297	0.7344	0.0047	0.716	0.724	...	...	0.720	0.724
	32	3B	0.7500	...	0.7297	0.7333	0.0036	0.7160	0.7219	...	...	0.7196	0.7238
(6) ¹³ / ₁₆ – 12 or 0.8125 – 12	UN	2B	0.8125	...	0.7584	0.7656	0.0072	0.722	0.740	...	...	0.731	0.741
	12	3B	0.8125	...	0.7584	0.7638	0.0054	0.7220	0.7329	...	...	0.7313	0.7413
(6) ¹³ / ₁₆ – 16 or 0.8125 – 16	UN	2B	0.8125	...	0.7719	0.7783	0.0064	0.745	0.759	...	...	0.752	0.760
	16	3B	0.8125	...	0.7719	0.7767	0.0048	0.7450	0.7533	...	...	0.7516	0.7601
(6) ¹³ / ₁₆ – 20 or 0.8125 – 20	UNEF	2B	0.8125	...	0.7800	0.7858	0.0058	0.758	0.770	...	...	0.764	0.771
	20	3B	0.8125	...	0.7800	0.7843	0.0043	0.7580	0.7662	...	...	0.7638	0.7706

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

					Major Diameter, <i>D</i>		Pitch Diameter, <i>D</i> ₂ , and Functional Diameter [Note (3)]		Minor Diameter, <i>D</i> ₁						
Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Min.	Max. [Note (2)]				Tolerance, <i>TD</i> ₂		UN [Note (4)]		UNR [Note (5)]		UNJ	
										Min.	Max.	Min.	Max.	Min.	Max.
					1	2	3	4	5	6	7	8	9	10	11
(6)	¹³ / ₁₆ – 28 or 0.8125 – 28	UN	2B	0.8125	...	0.7893	0.7943	0.0050	0.774	0.782	...	...	0.778	0.783	
(6)	28		3B	0.8125	...	0.7893	0.7931	0.0038	0.7740	0.7801	...	...	0.7777	0.7825	
(6)	¹³ / ₁₆ – 32 or 0.8125 – 32	UN	2B	0.8125	...	0.7922	0.7970	0.0048	0.779	0.786	...	...	0.782	0.786	
(6)	32		3B	0.8125	...	0.7922	0.7958	0.0036	0.7790	0.7844	...	...	0.7821	0.7863	
	⁷ / ₈ – 9 or 0.8750 – 9	UNC	1B	0.8750	...	0.8028	0.8151	0.0123	0.755	0.778	...	...	...	...	
	9		2B	0.8750	...	0.8028	0.8110	0.0082	0.755	0.778	...	...	0.767	0.780	
	9		3B	0.8750	...	0.8028	0.8089	0.0061	0.7550	0.7681	...	...	0.7667	0.7800	
(6)	⁷ / ₈ – 12 or 0.8750 – 12	UN	2B	0.8750	...	0.8209	0.8282	0.0073	0.785	0.803	...	...	0.794	0.804	
(6)	12		3B	0.8750	...	0.8209	0.8264	0.0055	0.7850	0.7952	...	...	0.7938	0.8038	
(6)	⁷ / ₈ – 14 or 0.8750 – 14	UNF	1B	0.8750	...	0.8286	0.8392	0.0106	0.798	0.813	...	...	...	...	
(6)	14		2B	0.8750	...	0.8286	0.8356	0.0070	0.798	0.813	...	...	0.805	0.815	
(6)	14		3B	0.8750	...	0.8286	0.8339	0.0053	0.7980	0.8068	...	...	0.8054	0.8151	
(6)	⁷ / ₈ – 16 or 0.8750 – 16	UN	2B	0.8750	...	0.8344	0.8408	0.0064	0.807	0.821	...	...	0.814	0.823	
(6)	16		3B	0.8750	...	0.8344	0.8392	0.0048	0.8070	0.8158	...	...	0.8141	0.8226	
(6)	⁷ / ₈ – 20 or 0.8750 – 20	UNEF	2B	0.8750	...	0.8425	0.8483	0.0058	0.821	0.832	...	...	0.826	0.833	
(6)	20		3B	0.8750	...	0.8425	0.8469	0.0044	0.8210	0.8287	...	...	0.8263	0.8331	
(6)	⁷ / ₈ – 28 or 0.8750 – 28	UN	2B	0.8750	...	0.8518	0.8569	0.0051	0.836	0.845	...	...	0.840	0.845	
(6)	28		3B	0.8750	...	0.8518	0.8556	0.0038	0.8360	0.8426	...	...	0.8402	0.8450	
(6)	⁷ / ₈ – 32 or 0.8750 – 32	UN	2B	0.8750	...	0.8547	0.8595	0.0048	0.841	0.849	...	...	0.845	0.849	
(6)	32		3B	0.8750	...	0.8547	0.8583	0.0036	0.8410	0.8469	...	...	0.8446	0.8488	
(6)	¹⁵ / ₁₆ – 12 or 0.9375 – 12	UN	2B	0.9375	...	0.8834	0.8907	0.0073	0.847	0.865	...	...	0.856	0.866	
(6)	12		3B	0.9375	...	0.8834	0.8889	0.0055	0.8470	0.8575	...	...	0.8563	0.8663	
(6)	¹⁵ / ₁₆ – 16 or 0.9375 – 16	UN	2B	0.9375	...	0.8969	0.9033	0.0064	0.870	0.884	...	...	0.877	0.885	
(6)	16		3B	0.9375	...	0.8969	0.9017	0.0048	0.8700	0.8783	...	...	0.8766	0.8851	

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

					Major Diameter, <i>D</i>		Pitch Diameter, <i>D</i> ₂ , and Functional Diameter [Note (3)]			Minor Diameter, <i>D</i> ₁					
Nominal Size and Threads/in.		Series Designation	Class [Note (1)]	Min.	Max. [Note (2)]	Tolerance, <i>TD</i> ₂			UN [Note (4)]		UNR [Note (5)]		UNJ		
									Min.	Max.	Min.	Max.	Min.	Max.	
1		2	3	4	5	6	7	8	9	10	11	12	13	14	
(6)	¹⁵ / ₁₆ – 20 or 0.9375 – 20	UNEF	2B	0.9375	...	0.9050	0.9109	0.0059	0.883	0.895	...	...	0.889	0.896	
	20		3B	0.9375	...	0.9050	0.9094	0.0044	0.8830	0.8912	...	...	0.8888	0.8956	
(6)	¹⁵ / ₁₆ – 28 or 0.9375 – 28	UN	2B	0.9375	...	0.9143	0.9194	0.0051	0.899	0.907	...	...	0.903	0.908	
	28		3B	0.9375	...	0.9143	0.9181	0.0038	0.8990	0.9051	...	...	0.9027	0.9075	
	¹⁵ / ₁₆ – 32 or 0.9375 – 32	UN	2B	0.9375	...	0.9172	0.9221	0.0049	0.904	0.911	...	...	0.907	0.911	
	32		3B	0.9375	...	0.9172	0.9209	0.0037	0.9040	0.9094	...	...	0.9071	0.9113	
	1 – 8 or 1.0000 – 8	UNC	1B	1.0000	...	0.9188	0.9320	0.0132	0.865	0.890	...	...	...	...	
	8		2B	1.0000	...	0.9188	0.9276	0.0088	0.865	0.890	...	...	0.878	0.893	
	8		3B	1.0000	...	0.9188	0.9254	0.0066	0.8650	0.8797	...	...	0.8782	0.8932	
	1 – 12 or 1.0000 – 12	UNF	1B	1.0000	...	0.9459	0.9573	0.0114	0.910	0.928	...	...	...	...	
	12		2B	1.0000	...	0.9459	0.9535	0.0076	0.910	0.928	...	...	0.919	0.929	
	12		3B	1.0000	...	0.9459	0.9516	0.0057	0.9100	0.9198	...	...	0.9188	0.9288	
(6), (7)	1 – 14 or 1.0000 – 14	UNS	2B	1.0000	...	0.9536	0.9605	0.0069	0.923	0.938	...	...	0.930	0.940	
	14		3B	1.0000	...	0.9536	0.9588	0.0052	0.9230	0.9315	...	...	0.9304	0.9401	
	1 – 16 or 1.0000 – 16	UN	2B	1.0000	...	0.9594	0.9659	0.0065	0.932	0.946	...	...	0.939	0.948	
	16		3B	1.0000	...	0.9594	0.9643	0.0049	0.9320	0.9408	...	...	0.9391	0.9476	
	1 – 20 or 1.0000 – 20	UNEF	2B	1.0000	...	0.9675	0.9734	0.0059	0.946	0.957	...	...	0.951	0.958	
	20		3B	1.0000	...	0.9675	0.9719	0.0044	0.9460	0.9537	...	...	0.9513	0.9581	
	1 – 28 or 1.0000 – 28	UN	2B	1.0000	...	0.9768	0.9820	0.0052	0.961	0.970	...	...	0.965	0.970	
	28		3B	1.0000	...	0.9768	0.9807	0.0039	0.9610	0.9676	...	...	0.9652	0.9700	
	1 – 32 or 1.0000 – 32	UN	2B	1.0000	...	0.9797	0.9846	0.0049	0.966	0.974	...	...	0.970	0.974	
	32		3B	1.0000	...	0.9797	0.9834	0.0037	0.9660	0.9719	...	...	0.9696	0.9738	

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

Nominal Size and Threads/in.			Major Diameter, <i>D</i>		Pitch Diameter, <i>D</i> ₂ , and Functional Diameter [Note (3)]			Minor Diameter, <i>D</i> ₁					
			Min.	Max. [Note (2)]	Min.	Max.	Tolerance, <i>TD</i> ₂	UN [Note (4)]		UNR [Note (5)]		UNJ	
								Min.	Max.	Min.	Max.	Min.	Max.
1	2	3	4	5	6	7	8	9	10	11	12	13	14
1 ¹ / ₁₆ – 8 or 1.0625 – 8	UN	2B	1.0625	...	0.9813	0.9902	0.0089	0.927	0.952	...	...	0.941	0.956
		3B	1.0625	...	0.9813	0.9880	0.0067	0.9270	0.9422	...	...	0.9407	0.9557
(6) 1 ¹ / ₁₆ – 12 or 1.0625 – 12	UN	2B	1.0625	...	1.0084	1.0158	0.0074	0.972	0.990	...	...	0.981	0.991
		3B	1.0625	...	1.0084	1.0139	0.0055	0.9720	0.9823	...	...	0.9813	0.9913
(6) 1 ¹ / ₁₆ – 16 or 1.0625 – 16	UN	2B	1.0625	...	1.0219	1.0284	0.0065	0.995	1.009	...	...	1.002	1.010
		3B	1.0625	...	1.0219	1.0268	0.0049	0.9950	1.0033	...	...	1.0016	1.0101
(6) 1 ¹ / ₁₆ – 18 or 1.0625 – 18	UNEF	2B	1.0625	...	1.0264	1.0326	0.0062	1.002	1.015	...	...	1.008	1.016
		3B	1.0625	...	1.0264	1.0311	0.0047	1.0020	1.0105	...	...	1.0084	1.0159
(6) 1 ¹ / ₁₆ – 20 or 1.0625 – 20	UN	2B	1.0625	...	1.0300	1.0359	0.0059	1.008	1.020	...	...	1.014	1.021
		3B	1.0625	...	1.0300	1.0345	0.0045	1.0080	1.0162	...	...	1.0138	1.0206
1 ¹ / ₁₆ – 28 or 1.0625 – 28	UN	2B	1.0625	...	1.0393	1.0445	0.0052	1.024	1.032	...	...	1.028	1.033
		3B	1.0625	...	1.0393	1.0432	0.0039	1.0240	1.0301	...	...	1.0277	1.0325
(6) 1 ¹ / ₈ – 7 or 1.1250 – 7	UNC	1B	1.1250	...	1.0322	1.0463	0.0141	0.970	0.998	...	...	...	...
		2B	1.1250	...	1.0322	1.0416	0.0094	0.970	0.998	...	...	0.986	1.003
		3B	1.1250	...	1.0322	1.0393	0.0071	0.9700	0.9875	...	...	0.9858	1.0029
1 ¹ / ₈ – 8 or 1.1250 – 8	UN	2B	1.1250	...	1.0438	1.0528	0.0090	0.990	1.015	...	...	1.003	1.018
		3B	1.1250	...	1.0438	1.0505	0.0067	0.9900	1.0047	...	...	1.0032	1.0182
1 ¹ / ₈ – 12 or 1.1250 – 12	UNF	1B	1.1250	...	1.0709	1.0826	0.0117	1.035	1.053	...	...	...	...
		2B	1.1250	...	1.0709	1.0787	0.0078	1.035	1.053	...	...	1.044	1.054
		3B	1.1250	...	1.0709	1.0768	0.0059	1.0350	1.0448	...	...	1.0438	1.0538
(6) 1 ¹ / ₈ – 16 or 1.1250 – 16	UN	2B	1.1250	...	1.0844	1.0910	0.0066	1.057	1.071	...	...	1.064	1.073
		3B	1.1250	...	1.0844	1.0893	0.0049	1.0570	1.0658	...	...	1.0641	1.0726
(6) 1 ¹ / ₈ – 18 or 1.1250 – 18	UNEF	2B	1.1250	...	1.0889	1.0951	0.0062	1.065	1.078	...	...	1.071	1.078
		3B	1.1250	...	1.0889	1.0936	0.0047	1.0650	1.0730	...	...	1.0709	1.0784

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

					Major Diameter, D		Pitch Diameter, D_2 , and Functional Diameter [Note (3)]		Minor Diameter, D_1					
Nominal Size and Threads/in.		Series Designation	Class [Note (1)]	Min.	Max. [Note (2)]	Tolerance, TD_2			UN [Note (4)]		UNR [Note (5)]		UNJ	
									Min.	Max.	Min.	Max.	Min.	Max.
	1	2	3	4	5	6	7	8	9	10	11	12	13	14
(6)	$1\frac{1}{8}$ – 20 or 1.1250 – 20	UN	2B	1.1250	...	1.0925	1.0985	0.0060	1.071	1.082	...	...	1.076	1.083
(6)	20		3B	1.1250	...	1.0925	1.0970	0.0045	1.0710	1.0787	...	...	1.0763	1.0831
	$1\frac{1}{8}$ – 28 or 1.1250 – 28	UN	2B	1.1250	...	1.1018	1.1070	0.0052	1.086	1.095	...	...	1.090	1.095
	28		3B	1.1250	...	1.1018	1.1057	0.0039	1.0860	1.0926	...	...	1.0902	1.0950
	$1\frac{3}{16}$ – 8 or 1.1875 – 8	UN	2B	1.1875	...	1.1063	1.1154	0.0091	1.052	1.077	...	...	1.066	1.081
	8		3B	1.1875	...	1.1063	1.1131	0.0068	1.0520	1.0672	...	...	1.0657	1.0807
(6)	$1\frac{3}{16}$ – 12 or 1.1875 – 12	UN	2B	1.1875	...	1.1334	1.1409	0.0075	1.097	1.115	...	...	1.106	1.116
	12		3B	1.1875	...	1.1334	1.1390	0.0056	1.0970	1.1073	...	...	1.1063	1.1163
	$1\frac{3}{16}$ – 16 or 1.1875 – 16	UN	2B	1.1875	...	1.1469	1.1535	0.0066	1.120	1.134	...	...	1.127	1.135
(6)	16		3B	1.1875	...	1.1469	1.1518	0.0049	1.1200	1.1283	...	...	1.1266	1.1351
(6)	$1\frac{3}{16}$ – 18 or 1.1875 – 18	UNEF	2B	1.1875	...	1.1514	1.1577	0.0063	1.127	1.140	...	...	1.133	1.141
	18		3B	1.1875	...	1.1514	1.1561	0.0047	1.1270	1.1355	...	...	1.1334	1.1409
(6)	$1\frac{3}{16}$ – 20 or 1.1875 – 20	UN	2B	1.1875	...	1.1550	1.1610	0.0060	1.133	1.145	...	...	1.139	1.146
(6)	20		3B	1.1875	...	1.1550	1.1595	0.0045	1.1330	1.1412	...	...	1.1388	1.1456
	$1\frac{3}{16}$ – 28 or 1.1875 – 28	UN	2B	1.1875	...	1.1643	1.1696	0.0053	1.149	1.157	...	...	1.153	1.158
	28		3B	1.1875	...	1.1643	1.1683	0.0040	1.1490	1.1551	...	...	1.1527	1.1575
	$1\frac{1}{4}$ – 7 or 1.2500 – 7	UNC	1B	1.2500	...	1.1572	1.1716	0.0144	1.095	1.123	...	...	...	...
	7		2B	1.2500	...	1.1572	1.1668	0.0096	1.095	1.123	...	...	1.111	1.128
	7		3B	1.2500	...	1.1572	1.1644	0.0072	1.0950	1.1125	...	...	1.1108	1.1279
	$1\frac{1}{4}$ – 8 or 1.2500 – 8	UN	2B	1.2500	...	1.1688	1.1780	0.0092	1.115	1.140	...	...	1.128	1.143
	8		3B	1.2500	...	1.1688	1.1757	0.0069	1.1150	1.1297	...	...	1.1282	1.1432
	$1\frac{1}{4}$ – 12 or 1.2500 – 12	UNF	1B	1.2500	...	1.1959	1.2079	0.0120	1.160	1.178	...	...	...	...
	12		2B	1.2500	...	1.1959	1.2039	0.0080	1.160	1.178	...	...	1.169	1.179
	12		3B	1.2500	...	1.1959	1.2019	0.0060	1.1600	1.1698	...	...	1.1688	1.1788

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

Nominal Size and Threads/in.			Major Diameter, <i>D</i>		Pitch Diameter, <i>D</i> ₂ , and Functional Diameter [Note (3)]			Minor Diameter, <i>D</i> ₁					
			Min.	Max. [Note (2)]	Min.	Max.	Tolerance, <i>TD</i> ₂	UN [Note (4)]		UNR [Note (5)]		UNJ	
								Min.	Max.	Min.	Max.	Min.	Max.
1	2	3	4	5	6	7	8	9	10	11	12	13	14
(6) 1¼ – 16 or 1.2500 – 16	UN	2B	1.2500	...	1.2094	1.2160	0.0066	1.182	1.196	...	...	1.189	1.198
		3B	1.2500	...	1.2094	1.2144	0.0050	1.1820	1.1908	...	...	1.1891	1.1976
1¼ – 18 or 1.2500 – 18	UNEF	2B	1.2500	...	1.2139	1.2202	0.0063	1.190	1.203	...	...	1.196	1.203
		3B	1.2500	...	1.2139	1.2186	0.0047	1.1900	1.1980	...	...	1.1959	1.2034
(6) 1¼ – 20 or 1.2500 – 20	UN	2B	1.2500	...	1.2175	1.2236	0.0061	1.196	1.207	...	...	1.201	1.208
		3B	1.2500	...	1.2175	1.2220	0.0045	1.1960	1.2037	...	...	1.2013	1.2081
1¼ – 28 or 1.2500 – 28	UN	2B	1.2500	...	1.2268	1.2321	0.0053	1.211	1.220	...	...	1.215	1.220
		3B	1.2500	...	1.2268	1.2308	0.0040	1.2110	1.2176	...	...	1.2152	1.2200
1⅝ – 8 or 1.3125 – 8	UN	2B	1.3125	...	1.2313	1.2405	0.0092	1.177	1.202	...	...	1.191	1.206
		3B	1.3125	...	1.2313	1.2382	0.0069	1.1770	1.1922	...	...	1.1907	1.2057
(6) 1⅝ – 12 or 1.3125 – 12	UN	2B	1.3125	...	1.2584	1.2659	0.0075	1.222	1.240	...	...	1.231	1.241
		3B	1.3125	...	1.2584	1.2641	0.0057	1.2220	1.2323	...	...	1.2313	1.2413
(6) 1⅝ – 16 or 1.3125 – 16	UN	2B	1.3125	...	1.2719	1.2786	0.0067	1.245	1.259	...	...	1.252	1.260
		3B	1.3125	...	1.2719	1.2769	0.0050	1.2450	1.2533	...	...	1.2516	1.2601
(6) 1⅝ – 18 or 1.3125 – 18	UNEF	2B	1.3125	...	1.2764	1.2828	0.0064	1.252	1.265	...	...	1.258	1.266
		3B	1.3125	...	1.2764	1.2812	0.0048	1.2520	1.2605	...	...	1.2584	1.2659
(6) 1⅝ – 20 or 1.3125 – 20	UN	2B	1.3125	...	1.2800	1.2861	0.0061	1.258	1.270	...	...	1.264	1.271
		3B	1.3125	...	1.2800	1.2846	0.0046	1.2580	1.2662	...	...	1.2638	1.2706
(6) 1⅝ – 28 or 1.3125 – 28	UN	2B	1.3125	...	1.2893	1.2947	0.0054	1.274	1.282	...	...	1.278	1.283
		3B	1.3125	...	1.2893	1.2933	0.0040	1.2740	1.2801	...	...	1.2777	1.2825
1¾ – 6 or 1.3750 – 6	UNC	1B	1.3750	...	1.2667	1.2822	0.0155	1.195	1.225	...	...	...	...
		2B	1.3750	...	1.2667	1.2771	0.0104	1.195	1.225	...	...	1.213	1.233
		3B	1.3750	...	1.2667	1.2745	0.0078	1.1950	1.2146	...	...	1.2126	1.2326

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

Nominal Size and Threads/in.			Major Diameter, <i>D</i>		Pitch Diameter, <i>D</i> ₂ , and Functional Diameter [Note (3)]			Minor Diameter, <i>D</i> ₁					
			Min.	Max. [Note (2)]	Min.	Max.	Tolerance, <i>TD</i> ₂	UN [Note (4)]		UNR [Note (5)]		UNJ	
								Min.	Max.	Min.	Max.	Min.	Max.
1	2	3	4	5	6	7	8	9	10	11	12	13	14
1 ³ / ₈ – 8 or 1.3750 – 8	UN	2B	1.3750	...	1.2938	1.3031	0.0093	1.240	1.265	...	...	1.253	1.268
		3B	1.3750	...	1.2938	1.3008	0.0070	1.2400	1.2547	...	...	1.2532	1.2682
1 ³ / ₈ – 12 or 1.3750 – 12	UNF	1B	1.3750	...	1.3209	1.3332	0.0123	1.285	1.303	...	...	...	...
		2B	1.3750	...	1.3209	1.3291	0.0082	1.285	1.303	...	...	1.294	1.304
		3B	1.3750	...	1.3209	1.3270	0.0061	1.2850	1.2948	...	...	1.2938	1.3038
(6) 1 ³ / ₈ – 16 or 1.3750 – 16	UN	2B	1.3750	...	1.3344	1.3411	0.0067	1.307	1.321	...	...	1.314	1.323
		3B	1.3750	...	1.3344	1.3394	0.0050	1.3070	1.3158	...	...	1.3141	1.3226
(6) 1 ³ / ₈ – 18 or 1.3750 – 18	UNEF	2B	1.3750	...	1.3389	1.3453	0.0064	1.315	1.328	...	...	1.321	1.328
		3B	1.3750	...	1.3389	1.3437	0.0048	1.3150	1.3230	...	...	1.3209	1.3284
1 ³ / ₈ – 20 or 1.3750 – 20	UN	2B	1.3750	...	1.3425	1.3486	0.0061	1.321	1.332	...	...	1.326	1.333
		3B	1.3750	...	1.3425	1.3471	0.0046	1.3210	1.3287	...	...	1.3263	1.3331
(6) 1 ³ / ₈ – 28 or 1.3750 – 28	UN	2B	1.3750	...	1.3518	1.3572	0.0054	1.336	1.345	...	...	1.340	1.345
		3B	1.3750	...	1.3518	1.3558	0.0040	1.3360	1.3426	...	...	1.3402	1.3450
1 ⁷ / ₁₆ – 6 or 1.4375 – 6	UN	2B	1.4375	...	1.3292	1.3396	0.0104	1.257	1.288	...	...	1.275	1.295
		3B	1.4375	...	1.3292	1.3370	0.0078	1.2570	1.2771	...	...	1.2751	1.2951
1 ⁷ / ₁₆ – 8 or 1.4375 – 8	UN	2B	1.4375	...	1.3563	1.3657	0.0094	1.302	1.327	...	...	1.316	1.331
		3B	1.4375	...	1.3563	1.3634	0.0071	1.3020	1.3172	...	...	1.3157	1.3307
1 ⁷ / ₁₆ – 12 or 1.4375 – 12	UN	2B	1.4375	...	1.3834	1.3910	0.0076	1.347	1.365	...	...	1.356	1.366
		3B	1.4375	...	1.3834	1.3891	0.0057	1.3470	1.3573	...	...	1.3563	1.3663
(6) 1 ⁷ / ₁₆ – 16 or 1.4375 – 16	UN	2B	1.4375	...	1.3969	1.4036	0.0067	1.370	1.384	...	...	1.377	1.385
		3B	1.4375	...	1.3969	1.4020	0.0051	1.3700	1.3783	...	...	1.3766	1.3851
(6) 1 ⁷ / ₁₆ – 18 or 1.4375 – 18	UNEF	2B	1.4375	...	1.4014	1.4078	0.0064	1.377	1.390	...	...	1.383	1.391
		3B	1.4375	...	1.4014	1.4062	0.0048	1.3770	1.3855	...	...	1.3834	1.3909

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

Nominal Size and Threads/in.			Major Diameter, <i>D</i>		Pitch Diameter, <i>D</i> ₂ , and Functional Diameter [Note (3)]			Minor Diameter, <i>D</i> ₁					
			Min.	Max. [Note (2)]	Min.	Max.	Tolerance, <i>TD</i> ₂	UN [Note (4)]		UNR [Note (5)]		UNJ	
								Min.	Max.	Min.	Max.	Min.	Max.
1	2	3	4	5	6	7	8	9	10	11	12	13	14
(6) 1 ⁷ / ₁₆ – 20 or 1.4375 – 20	UN	2B	1.4375	...	1.4050	1.4112	0.0062	1.383	1.395	...	...	1.389	1.396
(6) 20		3B	1.4375	...	1.4050	1.4096	0.0046	1.3830	1.3912	...	...	1.3888	1.3956
(6) 1 ⁷ / ₁₆ – 28 or 1.4375 – 28	UN	2B	1.4375	...	1.4143	1.4197	0.0054	1.399	1.407	...	...	1.403	1.408
28		3B	1.4375	...	1.4143	1.4184	0.0041	1.3990	1.4051	...	...	1.4027	1.4075
1 ¹ / ₂ – 6 or 1.5000 – 6	UNC	1B	1.5000	...	1.3917	1.4075	0.0158	1.320	1.350	...	...	...	...
6		2B	1.5000	...	1.3917	1.4022	0.0105	1.320	1.350	...	...	1.338	1.358
6		3B	1.5000	...	1.3917	1.3996	0.0079	1.3200	1.3396	...	...	1.3376	1.3576
1 ¹ / ₂ – 8 or 1.5000 – 8	UN	2B	1.5000	...	1.4188	1.4283	0.0095	1.365	1.390	...	...	1.378	1.393
8		3B	1.5000	...	1.4188	1.4259	0.0071	1.3650	1.3797	...	...	1.3782	1.3932
1 ¹ / ₂ – 12 or 1.5000 – 12	UNF	1B	1.5000	...	1.4459	1.4584	0.0125	1.410	1.428	...	...	...	...
12		2B	1.5000	...	1.4459	1.4542	0.0083	1.410	1.428	...	...	1.419	1.429
12		3B	1.5000	...	1.4459	1.4522	0.0063	1.4100	1.4198	...	...	1.4188	1.4288
(6) 1 ¹ / ₂ – 16 or 1.5000 – 16	UN	2B	1.5000	...	1.4594	1.4662	0.0068	1.432	1.446	...	...	1.439	1.448
16		3B	1.5000	...	1.4594	1.4645	0.0051	1.4320	1.4408	...	...	1.4391	1.4476
(6) 1 ¹ / ₂ – 18 or 1.5000 – 18	UNEF	2B	1.5000	...	1.4639	1.4704	0.0065	1.440	1.453	...	...	1.446	1.453
18		3B	1.5000	...	1.4639	1.4687	0.0048	1.4400	1.4480	...	...	1.4459	1.4534
1 ¹ / ₂ – 20 or 1.5000 – 20	UN	2B	1.5000	...	1.4675	1.4737	0.0062	1.446	1.457	...	...	1.451	1.458
(6) 20		3B	1.5000	...	1.4675	1.4721	0.0046	1.4460	1.4537	...	...	1.4513	1.4581
1 ¹ / ₂ – 28 or 1.5000 – 28	UN	2B	1.5000	...	1.4768	1.4823	0.0055	1.461	1.470	...	...	1.465	1.470
28		3B	1.5000	...	1.4768	1.4809	0.0041	1.4610	1.4676	...	...	1.4652	1.4700
1 ⁹ / ₁₆ – 6 or 1.5625 – 6	UN	2B	1.5625	...	1.4542	1.4648	0.0106	1.382	1.413	...	...	1.400	1.420
6		3B	1.5625	...	1.4542	1.4622	0.0080	1.3820	1.4021	...	...	1.4001	1.4201
1 ⁹ / ₁₆ – 8 or 1.5625 – 8	UN	2B	1.5625	...	1.4813	1.4909	0.0096	1.427	1.452	...	...	1.441	1.456
8		3B	1.5625	...	1.4813	1.4885	0.0072	1.4270	1.4422	...	...	1.4407	1.4557

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

Nominal Size and Threads/in.			Major Diameter, <i>D</i>		Pitch Diameter, <i>D</i> ₂ , and Functional Diameter [Note (3)]			Minor Diameter, <i>D</i> ₁						
			Min.	Max. [Note (2)]	Min.	Max.	Tolerance, <i>TD</i> ₂	UN [Note (4)]		UNR [Note (5)]		UNJ		
								Min.	Max.	Min.	Max.	Min.	Max.	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	
(6)	1 ⁹ / ₁₆ – 12 or 1.5625 – 12	UN	2B	1.5625	...	1.5084	1.5161	0.0077	1.472	1.490	...	...	1.481	1.491
(6)	12		3B	1.5625	...	1.5084	1.5142	0.0058	1.4720	1.4823	...	...	1.4813	1.4913
	1 ⁹ / ₁₆ – 16 or 1.5625 – 16	UN	2B	1.5625	...	1.5219	1.5287	0.0068	1.495	1.509	...	...	1.502	1.510
(6)	16		3B	1.5625	...	1.5219	1.5270	0.0051	1.4950	1.5033	...	...	1.5016	1.5101
	1 ⁹ / ₁₆ – 18 or 1.5625 – 18	UNEF	2B	1.5625	...	1.5264	1.5329	0.0065	1.502	1.515	...	...	1.508	1.516
(6)	18		3B	1.5625	...	1.5264	1.5313	0.0049	1.5020	1.5105	...	...	1.5084	1.5159
	1 ⁹ / ₁₆ – 20 or 1.5625 – 20	UN	2B	1.5625	...	1.5300	1.5362	0.0062	1.508	1.520	...	...	1.514	1.521
(6)	20		3B	1.5625	...	1.5300	1.5347	0.0047	1.5080	1.5162	...	...	1.5138	1.5206
	1 ⁵ / ₈ – 6 or 1.6250 – 6	UN	2B	1.6250	...	1.5167	1.5274	0.0107	1.445	1.475	...	...	1.463	1.483
	6		3B	1.6250	...	1.5167	1.5247	0.0080	1.4450	1.4646	...	...	1.4626	1.4826
	1 ⁵ / ₈ – 8 or 1.6250 – 8	UN	2B	1.6250	...	1.5438	1.5535	0.0097	1.490	1.515	...	...	1.503	1.518
	8		3B	1.6250	...	1.5438	1.5510	0.0072	1.4900	1.5047	...	...	1.5032	1.5182
(6)	1 ⁵ / ₈ – 12 or 1.6250 – 12	UN	2B	1.6250	...	1.5709	1.5786	0.0077	1.535	1.553	...	...	1.544	1.554
(6)	12		3B	1.6250	...	1.5709	1.5767	0.0058	1.5350	1.5448	...	...	1.5438	1.5538
(6)	1 ⁵ / ₈ – 16 or 1.6250 – 16	UN	2B	1.6250	...	1.5844	1.5912	0.0068	1.557	1.571	...	...	1.564	1.573
	16		3B	1.6250	...	1.5844	1.5895	0.0051	1.5570	1.5658	...	...	1.5641	1.5726
(6)	1 ⁵ / ₈ – 18 or 1.6250 – 18	UNEF	2B	1.6250	...	1.5889	1.5954	0.0065	1.565	1.578	...	...	1.571	1.578
	18		3B	1.6250	...	1.5889	1.5938	0.0049	1.5650	1.5730	...	...	1.5709	1.5784
(6)	1 ⁵ / ₈ – 20 or 1.6250 – 20	UN	2B	1.6250	...	1.5925	1.5987	0.0062	1.571	1.582	...	...	1.576	1.583
	20		3B	1.6250	...	1.5925	1.5972	0.0047	1.5710	1.5787	...	...	1.5763	1.5831
	1 ¹¹ / ₁₆ – 6 or 1.6875 – 6	UN	2B	1.6875	...	1.5792	1.5900	0.0108	1.507	1.538	...	...	1.525	1.545
	6		3B	1.6875	...	1.5792	1.5873	0.0081	1.5070	1.5271	...	...	1.5251	1.5451
	1 ¹¹ / ₁₆ – 8 or 1.6875 – 8	UN	2B	1.6875	...	1.6063	1.6160	0.0097	1.552	1.577	...	...	1.566	1.581
	8		3B	1.6875	...	1.6063	1.6136	0.0073	1.5520	1.5672	...	...	1.5657	1.5807

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

Nominal Size and Threads/in.			Major Diameter, <i>D</i>		Pitch Diameter, <i>D</i> ₂ , and Functional Diameter [Note (3)]			Minor Diameter, <i>D</i> ₁							
			Min.	Max. [Note (2)]	Min.	Max.	Tolerance, <i>TD</i> ₂	UN [Note (4)]		UNR [Note (5)]		UNJ			
								Min.	Max.	Min.	Max.	Min.	Max.		
1	2	3	4	5	6	7	8	9	10	11	12	13	14		
(6) 1 ¹¹ / ₁₆ – 12 or 1.6875 – 12	UN	2B	1.6875	...	1.6334	1.6411	0.0077	1.597	1.615	...	...	1.606	1.616		
			12	3B	1.6875	...	1.6334	1.6392	0.0058	1.5970	1.6073	...	...	1.6063	1.6163
1 ¹¹ / ₁₆ – 16 or 1.6875 – 16	UN	2B	1.6875	...	1.6469	1.6538	0.0069	1.620	1.634	...	...	1.627	1.635		
			(6) 16	3B	1.6875	...	1.6469	1.6520	0.0051	1.6200	1.6283	...	...	1.6266	1.6351
(6) 1 ¹¹ / ₁₆ – 18 or 1.6875 – 18	UNEF	2B	1.6875	...	1.6514	1.6579	0.0065	1.627	1.640	...	...	1.633	1.641		
			18	3B	1.6875	...	1.6514	1.6563	0.0049	1.6270	1.6355	...	...	1.6334	1.6409
(6) 1 ¹¹ / ₁₆ – 20 or 1.6875 – 20	UN	2B	1.6875	...	1.6550	1.6613	0.0063	1.633	1.645	...	...	1.639	1.646		
			(6) 20	3B	1.6875	...	1.6550	1.6597	0.0047	1.6330	1.6412	...	...	1.6388	1.6456
(6) 1 ³ / ₄ – 5 or 1.7500 – 5	UNC	1B	1.7500	...	1.6201	1.6375	0.0174	1.533	1.567	...	...	...	...		
			(6) 5	2B	1.7500	...	1.6201	1.6317	0.0116	1.533	1.567	...	...	1.555	1.579
			(6) 5	3B	1.7500	...	1.6201	1.6288	0.0087	1.5330	1.5575	...	...	1.5551	1.5791
1 ³ / ₄ – 6 or 1.7500 – 6	UN	2B	1.7500	...	1.6417	1.6525	0.0108	1.570	1.600	...	...	1.588	1.608		
			6	3B	1.7500	...	1.6417	1.6498	0.0081	1.5700	1.5896	...	...	1.5876	1.6076
			(6) 1 ³ / ₄ – 8 or 1.7500 – 8	UN	2B	1.7500	...	1.6688	1.6786	0.0098	1.615	1.640	...	...	1.628
(6) 8	3B	1.7500				...	1.6688	1.6762	0.0074	1.6150	1.6297	...	...	1.6282	1.6432
1 ³ / ₄ – 12 or 1.7500 – 12	UN	2B	1.7500	...	1.6959	1.7037	0.0078	1.660	1.678	...	...	1.669	1.679		
			12	3B	1.7500	...	1.6959	1.7017	0.0058	1.6600	1.6698	...	...	1.6688	1.6788
1 ³ / ₄ – 16 or 1.7500 – 16	UN	2B	1.7500	...	1.7094	1.7163	0.0069	1.682	1.696	...	...	1.689	1.698		
			(6) 16	3B	1.7500	...	1.7094	1.7146	0.0052	1.6820	1.6908	...	...	1.6891	1.6976
1 ³ / ₄ – 20 or 1.7500 – 20	UN	2B	1.7500	...	1.7175	1.7238	0.0063	1.696	1.707	...	...	1.701	1.708		
			(6) 20	3B	1.7500	...	1.7175	1.7222	0.0047	1.6960	1.7037	...	...	1.7013	1.7081
1 ¹³ / ₁₆ – 6 or 1.8125 – 6	UN	2B	1.8125	...	1.7042	1.7151	0.0109	1.632	1.663	...	...	1.650	1.670		
			6	3B	1.8125	...	1.7042	1.7124	0.0082	1.6320	1.6521	...	...	1.6501	1.6701

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

Nominal Size and Threads/in.			Major Diameter, <i>D</i>		Pitch Diameter, <i>D</i> ₂ , and Functional Diameter [Note (3)]			Minor Diameter, <i>D</i> ₁					
			Min.	Max. [Note (2)]	Min.	Max.	Tolerance, <i>TD</i> ₂	UN [Note (4)]		UNR [Note (5)]		UNJ	
								Min.	Max.	Min.	Max.	Min.	Max.
1	2	3	4	5	6	7	8	9	10	11	12	13	14
1 ¹³ / ₁₆ – 8 or 1.8125 – 8	UN	2B	1.8125	...	1.7313	1.7412	0.0099	1.677	1.702	...	...	1.691	1.706
		3B	1.8125	...	1.7313	1.7387	0.0074	1.6770	1.6922	...	...	1.6907	1.7057
1 ¹³ / ₁₆ – 12 or 1.8125 – 12	UN	2B	1.8125	...	1.7584	1.7662	0.0078	1.722	1.740	...	...	1.731	1.741
		3B	1.8125	...	1.7584	1.7642	0.0058	1.7220	1.7323	...	...	1.7313	1.7413
1 ¹³ / ₁₆ – 16 or 1.8125 – 16	UN	2B	1.8125	...	1.7719	1.7788	0.0069	1.745	1.759	...	...	1.752	1.760
		3B	1.8125	...	1.7719	1.7771	0.0052	1.7450	1.7533	...	...	1.7516	1.7601
1 ¹³ / ₁₆ – 20 or 1.8125 – 20	UN	2B	1.8125	...	1.7800	1.7863	0.0063	1.758	1.770	...	...	1.764	1.771
		3B	1.8125	...	1.7800	1.7847	0.0047	1.7580	1.7662	...	...	1.7638	1.7706
1 ⁷ / ₈ – 6 or 1.8750 – 6	UN	2B	1.8750	...	1.7667	1.7777	0.0110	1.695	1.725	...	...	1.713	1.733
		3B	1.8750	...	1.7667	1.7749	0.0082	1.6950	1.7146	...	...	1.7126	1.7326
1 ⁷ / ₈ – 8 or 1.8750 – 8	UN	2B	1.8750	...	1.7938	1.8038	0.0100	1.740	1.765	...	...	1.753	1.768
		3B	1.8750	...	1.7938	1.8013	0.0075	1.7400	1.7547	...	...	1.7532	1.7682
1 ⁷ / ₈ – 12 or 1.8750 – 12	UN	2B	1.8750	...	1.8209	1.8287	0.0078	1.785	1.803	...	...	1.794	1.804
		3B	1.8750	...	1.8209	1.8268	0.0059	1.7850	1.7948	...	...	1.7938	1.8038
1 ⁷ / ₈ – 16 or 1.8750 – 16	UN	2B	1.8750	...	1.8344	1.8413	0.0069	1.807	1.821	...	...	1.814	1.823
		3B	1.8750	...	1.8344	1.8396	0.0052	1.8070	1.8158	...	...	1.8141	1.8226
1 ⁷ / ₈ – 20 or 1.8750 – 20	UN	2B	1.8750	...	1.8425	1.8489	0.0064	1.821	1.832	...	...	1.826	1.833
		3B	1.8750	...	1.8425	1.8473	0.0048	1.8210	1.8287	...	...	1.8263	1.8331
1 ¹⁵ / ₁₆ – 6 or 1.9375 – 6	UN	2B	1.9375	...	1.8292	1.8403	0.0111	1.757	1.788	...	...	1.775	1.795
		3B	1.9375	...	1.8292	1.8375	0.0083	1.7570	1.7771	...	...	1.7751	1.7951
1 ¹⁵ / ₁₆ – 8 or 1.9375 – 8	UN	2B	1.9375	...	1.8563	1.8663	0.0100	1.802	1.827	...	...	1.816	1.831
		3B	1.9375	...	1.8563	1.8638	0.0075	1.8020	1.8172	...	...	1.8157	1.8307
1 ¹⁵ / ₁₆ – 12 or 1.9375 – 12	UN	2B	1.9375	...	1.8834	1.8912	0.0078	1.847	1.865	...	...	1.856	1.866
		3B	1.9375	...	1.8834	1.8893	0.0059	1.8470	1.8573	...	...	1.8563	1.8663

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

Nominal Size and Threads/in.			Major Diameter, <i>D</i>		Pitch Diameter, <i>D</i> ₂ , and Functional Diameter [Note (3)]			Minor Diameter, <i>D</i> ₁					
			Min.	Max. [Note (2)]	Min.	Max.	Tolerance, <i>TD</i> ₂	UN [Note (4)]		UNR [Note (5)]		UNJ	
								Min.	Max.	Min.	Max.	Min.	Max.
1	2	3	4	5	6	7	8	9	10	11	12	13	14
(6) 1 ¹⁵ / ₁₆ – 16 or 1.9375 – 16	UN	2B	1.9375	...	1.8969	1.9039	0.0070	1.870	1.884	...	...	1.877	1.885
		3B	1.9375	...	1.8969	1.9021	0.0052	1.8700	1.8783	...	...	1.8766	1.8851
(6) 1 ¹⁵ / ₁₆ – 20 or 1.9375 – 20	UN	2B	1.9375	...	1.9050	1.9114	0.0064	1.883	1.895	...	...	1.889	1.896
		3B	1.9375	...	1.9050	1.9098	0.0048	1.8830	1.8912	...	...	1.8888	1.8956
2 – 4.5 or 2.0000 – 4.5	UNC	1B	2.0000	...	1.8557	1.8743	0.0186	1.759	1.795	...	...	...	...
		2B	2.0000	...	1.8557	1.8681	0.0124	1.759	1.795	...	...	1.783	1.810
		3B	2.0000	...	1.8557	1.8650	0.0093	1.7590	1.7861	...	...	1.7835	1.8102
2 – 6 or 2.0000 – 6	UN	2B	2.0000	...	1.8917	1.9028	0.0111	1.820	1.850	...	...	1.838	1.858
		3B	2.0000	...	1.8917	1.9000	0.0083	1.8200	1.8396	...	...	1.8376	1.8576
2 – 8 or 2.0000 – 8	UN	2B	2.0000	...	1.9188	1.9289	0.0101	1.865	1.890	...	...	1.878	1.893
		3B	2.0000	...	1.9188	1.9264	0.0076	1.8650	1.8797	...	...	1.8782	1.8932
2 – 12 or 2.0000 – 12	UN	2B	2.0000	...	1.9459	1.9538	0.0079	1.910	1.928	...	...	1.919	1.929
		3B	2.0000	...	1.9459	1.9518	0.0059	1.9100	1.9198	...	...	1.9188	1.9288
(6) 2 – 16 or 2.0000 – 16	UN	2B	2.0000	...	1.9594	1.9664	0.0070	1.932	1.946	...	...	1.939	1.948
		3B	2.0000	...	1.9594	1.9646	0.0052	1.9320	1.9408	...	...	1.9391	1.9476
(6) 2 – 20 or 2.0000 – 20	UN	2B	2.0000	...	1.9675	1.9739	0.0064	1.946	1.957	...	...	1.951	1.958
		3B	2.0000	...	1.9675	1.9723	0.0048	1.9460	1.9537	...	...	1.9513	1.9581
2 ¹ / ₈ – 6 or 2.1250 – 6	UN	2B	2.1250	...	2.0167	2.0280	0.0113	1.945	1.975	...	...	1.963	1.983
		3B	2.1250	...	2.0167	2.0251	0.0084	1.9450	1.9646	...	...	1.9626	1.9826
2 ¹ / ₈ – 8 or 2.1250 – 8	UN	2B	2.1250	...	2.0438	2.0540	0.0102	1.990	2.015	...	...	2.003	2.018
		3B	2.1250	...	2.0438	2.0515	0.0077	1.9900	2.0047	...	...	2.0032	2.0182
(6) 2 ¹ / ₈ – 12 or 2.1250 – 12	UN	2B	2.1250	...	2.0709	2.0788	0.0079	2.035	2.053	...	...	2.044	2.054
		3B	2.1250	...	2.0709	2.0768	0.0059	2.0350	2.0448	...	...	2.0438	2.0538

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

Nominal Size and Threads/in.			Major Diameter, <i>D</i>		Pitch Diameter, <i>D</i> ₂ , and Functional Diameter [Note (3)]			Minor Diameter, <i>D</i> ₁					
			Min.	Max. [Note (2)]	Min.	Max.	Tolerance, <i>TD</i> ₂	UN [Note (4)]		UNR [Note (5)]		UNJ	
								Min.	Max.	Min.	Max.	Min.	Max.
1	2	3	4	5	6	7	8	9	10	11	12	13	14
(6) 2 ¹ / ₈ – 16 or 2.1250 – 16	UN	2B	2.1250	...	2.0844	2.0914	0.0070	2.057	2.071	...	...	2.064	2.073
		3B	2.1250	...	2.0844	2.0897	0.0053	2.0570	2.0658	...	...	2.0641	2.0726
(6) 2 ¹ / ₈ – 20 or 2.1250 – 20	UN	2B	2.1250	...	2.0925	2.0990	0.0065	2.071	2.082	...	...	2.076	2.083
		3B	2.1250	...	2.0925	2.0973	0.0048	2.0710	2.0787	...	...	2.0763	2.0831
2 ¹ / ₄ – 4.5 or 2.2500 – 4.5	UNC	1B	2.2500	...	2.1057	2.1247	0.0190	2.009	2.045	...	...	...	...
		2B	2.2500	...	2.1057	2.1183	0.0126	2.009	2.045	...	...	2.033	2.060
		3B	2.2500	...	2.1057	2.1152	0.0095	2.0090	2.0361	...	...	2.0335	2.0602
2 ¹ / ₄ – 6 or 2.2500 – 6	UN	2B	2.2500	...	2.1417	2.1531	0.0114	2.070	2.100	...	...	2.088	2.108
		3B	2.2500	...	2.1417	2.1502	0.0085	2.0700	2.0896	...	...	2.0876	2.1076
2 ¹ / ₄ – 8 or 2.2500 – 8	UN	2B	2.2500	...	2.1688	2.1792	0.0104	2.115	2.140	...	...	2.128	2.143
		3B	2.2500	...	2.1688	2.1766	0.0078	2.1150	2.1297	...	...	2.1282	2.1432
(6) 2 ¹ / ₄ – 12 or 2.2500 – 12	UN	2B	2.2500	...	2.1959	2.2039	0.0080	2.160	2.178	...	...	2.169	2.179
		3B	2.2500	...	2.1959	2.2019	0.0060	2.1600	2.1698	...	...	2.1688	2.1788
(6) 2 ¹ / ₄ – 16 or 2.2500 – 16	UN	2B	2.2500	...	2.2094	2.2165	0.0071	2.182	2.196	...	...	2.189	2.198
		3B	2.2500	...	2.2094	2.2147	0.0053	2.1820	2.1908	...	...	2.1891	2.1976
(6) 2 ¹ / ₄ – 20 or 2.2500 – 20	UN	2B	2.2500	...	2.2175	2.2240	0.0065	2.196	2.207	...	...	2.201	2.208
		3B	2.2500	...	2.2175	2.2224	0.0049	2.1960	2.2037	...	...	2.2013	2.2081
(6) 2 ³ / ₈ – 6 or 2.3750 – 6	UN	2B	2.3750	...	2.2667	2.2782	0.0115	2.195	2.225	...	...	2.213	2.233
		3B	2.3750	...	2.2667	2.2753	0.0086	2.1950	2.2146	...	...	2.2126	2.2326
2 ³ / ₈ – 8 or 2.3750 – 8	UN	2B	2.3750	...	2.2938	2.3043	0.0105	2.240	2.265	...	...	2.253	2.268
		3B	2.3750	...	2.2938	2.3017	0.0079	2.2400	2.2547	...	...	2.2532	2.2682
(6) 2 ³ / ₈ – 12 or 2.3750 – 12	UN	2B	2.3750	...	2.3209	2.3289	0.0080	2.285	2.303	...	...	2.294	2.304
		3B	2.3750	...	2.3209	2.3269	0.0060	2.2850	2.2948	...	...	2.2938	2.3038

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

Nominal Size and Threads/in.			Major Diameter, <i>D</i>		Pitch Diameter, <i>D</i> ₂ , and Functional Diameter [Note (3)]			Minor Diameter, <i>D</i> ₁						
			Min.	Max. [Note (2)]	Min.	Max.	Tolerance, <i>TD</i> ₂	UN [Note (4)]		UNR [Note (5)]		UNJ		
								Min.	Max.	Min.	Max.	Min.	Max.	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	
(6)	2 ³ / ₈ – 16 or 2.3750 – 16	UN	2B	2.3750	...	2.3344	2.3415	0.0071	2.307	2.321	...	...	2.314	2.323
	16		3B	2.3750	...	2.3344	2.3398	0.0054	2.3070	2.3158	...	...	2.3141	2.3226
(6)	2 ³ / ₈ – 20 or 2.3750 – 20	UN	2B	2.3750	...	2.3425	2.3491	0.0066	2.321	2.332	...	...	2.326	2.333
	20		3B	2.3750	...	2.3425	2.3474	0.0049	2.3210	2.3287	...	...	2.3263	2.3331
	2 ¹ / ₂ – 4 or 2.5000 – 4	UNC	1B	2.5000	...	2.3376	2.3578	0.0202	2.229	2.267	...	...	...	...
	4		2B	2.5000	...	2.3376	2.3511	0.0135	2.229	2.267	...	...	2.256	2.286
	4		3B	2.5000	...	2.3376	2.3477	0.0101	2.2290	2.2594	...	...	2.2564	2.2864
	2 ¹ / ₂ – 6 or 2.5000 – 6	UN	2B	2.5000	...	2.3917	2.4033	0.0116	2.320	2.350	...	...	2.338	2.358
	6		3B	2.5000	...	2.3917	2.4004	0.0087	2.3200	2.3396	...	...	2.3376	2.3576
	2 ¹ / ₂ – 8 or 2.5000 – 8	UN	2B	2.5000	...	2.4188	2.4294	0.0106	2.365	2.390	...	...	2.378	2.393
	8		3B	2.5000	...	2.4188	2.4268	0.0080	2.3650	2.3797	...	...	2.3782	2.3932
	2 ¹ / ₂ – 12 or 2.5000 – 12	UN	2B	2.5000	...	2.4459	2.4540	0.0081	2.410	2.428	...	...	2.419	2.429
	12		3B	2.5000	...	2.4459	2.4519	0.0060	2.4100	2.4198	...	...	2.4188	2.4288
(6)	2 ¹ / ₂ – 16 or 2.5000 – 16	UN	2B	2.5000	...	2.4594	2.4666	0.0072	2.432	2.446	...	...	2.439	2.448
	16		3B	2.5000	...	2.4594	2.4648	0.0054	2.4320	2.4408	...	...	2.4391	2.4476
(6)	2 ¹ / ₂ – 20 or 2.5000 – 20	UN	2B	2.5000	...	2.4675	2.4741	0.0066	2.446	2.457	...	...	2.451	2.458
	20		3B	2.5000	...	2.4675	2.4725	0.0050	2.4460	2.4537	...	...	2.4513	2.4581
	2 ⁵ / ₈ – 4 or 2.6250 – 4	UN	2B	2.6250	...	2.4626	2.4762	0.0136	2.354	2.392	...	...	2.381	2.411
	4		3B	2.6250	...	2.4626	2.4727	0.0101	2.3540	2.3844	...	...	2.3814	2.4114
	2 ⁵ / ₈ – 6 or 2.6250 – 6	UN	2B	2.6250	...	2.5167	2.5285	0.0118	2.445	2.475	...	...	2.463	2.483
	6		3B	2.6250	...	2.5167	2.5255	0.0088	2.4450	2.4646	...	...	2.4626	2.4826
	2 ⁵ / ₈ – 8 or 2.6250 – 8	UN	2B	2.6250	...	2.5438	2.5545	0.0107	2.490	2.515	...	...	2.503	2.518
	8		3B	2.6250	...	2.5438	2.5518	0.0080	2.4900	2.5047	...	...	2.5032	2.5182

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Major Diameter, D		Pitch Diameter, D_2 , and Functional Diameter [Note (3)]			Minor Diameter, D_1					
			Min.	Max. [Note (2)]	Min.	Max.	Tolerance, TD_2	UN [Note (4)]		UNR [Note (5)]		UNJ	
								Min.	Max.	Min.	Max.	Min.	Max.
1	2	3	4	5	6	7	8	9	10	11	12	13	14
(6) $2\frac{5}{8}$ – 12 or 2.6250 – 12	UN	2B	2.6250	...	2.5709	2.5790	0.0081	2.535	2.553	...	...	2.544	2.554
12		3B	2.6250	...	2.5709	2.5770	0.0061	2.5350	2.5448	...	...	2.5438	2.5538
(6) $2\frac{5}{8}$ – 16 or 2.6250 – 16	UN	2B	2.6250	...	2.5844	2.5916	0.0072	2.557	2.571	...	...	2.564	2.573
(6) 16		3B	2.6250	...	2.5844	2.5898	0.0054	2.5570	2.5658	...	...	2.5641	2.5726
$2\frac{5}{8}$ – 20 or 2.6250 – 20	UN	2B	2.6250	...	2.5925	2.5991	0.0066	2.571	2.582	...	...	2.576	2.583
(6) 20		3B	2.6250	...	2.5925	2.5975	0.0050	2.5710	2.5787	...	...	2.5763	2.5831
$2\frac{3}{4}$ – 4 or 2.7500 – 4	UNC	1B	2.7500	...	2.5876	2.6082	0.0206	2.479	2.517	...	...	...	...
4		2B	2.7500	...	2.5876	2.6013	0.0137	2.479	2.517	...	...	2.506	2.536
4		3B	2.7500	...	2.5876	2.5979	0.0103	2.4790	2.5094	...	...	2.5064	2.5364
$2\frac{3}{4}$ – 6 or 2.7500 – 6	UN	2B	2.7500	...	2.6417	2.6536	0.0119	2.570	2.600	...	...	2.588	2.608
6		3B	2.7500	...	2.6417	2.6506	0.0089	2.5700	2.5896	...	...	2.5876	2.6076
$2\frac{3}{4}$ – 8 or 2.7500 – 8	UN	2B	2.7500	...	2.6688	2.6796	0.0108	2.615	2.640	...	...	2.628	2.643
8		3B	2.7500	...	2.6688	2.6769	0.0081	2.6150	2.6297	...	...	2.6282	2.6432
(6) $2\frac{3}{4}$ – 12 or 2.7500 – 12	UN	2B	2.7500	...	2.6959	2.7040	0.0081	2.660	2.678	...	...	2.669	2.679
(6) 12		3B	2.7500	...	2.6959	2.7020	0.0061	2.6600	2.6698	...	...	2.6688	2.6788
(6) $2\frac{3}{4}$ – 16 or 2.7500 – 16	UN	2B	2.7500	...	2.7094	2.7167	0.0073	2.682	2.696	...	...	2.689	2.698
(6) 16		3B	2.7500	...	2.7094	2.7148	0.0054	2.6820	2.6908	...	...	2.6891	2.6976
(6) $2\frac{3}{4}$ – 20 or 2.7500 – 20	UN	2B	2.7500	...	2.7175	2.7242	0.0067	2.696	2.707	...	...	2.701	2.708
(6) 20		3B	2.7500	...	2.7175	2.7225	0.0050	2.6960	2.7037	...	...	2.7013	2.7081
$2\frac{7}{8}$ – 4 or 2.8750 – 4	UN	2B	2.8750	...	2.7126	2.7264	0.0138	2.604	2.642	...	...	2.631	2.661
4		3B	2.8750	...	2.7126	2.7230	0.0104	2.6040	2.6344	...	...	2.6314	2.6614
$2\frac{7}{8}$ – 6 or 2.8750 – 6	UN	2B	2.8750	...	2.7667	2.7787	0.0120	2.695	2.725	...	...	2.713	2.733
6		3B	2.8750	...	2.7667	2.7757	0.0090	2.6950	2.7146	...	...	2.7126	2.7326

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Major Diameter, <i>D</i>		Pitch Diameter, <i>D</i> ₂ , and Functional Diameter [Note (3)]			Minor Diameter, <i>D</i> ₁					
			Min.	Max. [Note (2)]	Min.	Max.	Tolerance, <i>TD</i> ₂	UN [Note (4)]		UNR [Note (5)]		UNJ	
								Min.	Max.	Min.	Max.	Min.	Max.
1	2	3	4	5	6	7	8	9	10	11	12	13	14
2 ⁷ / ₈ – 8 or 2.8750 – 8	UN	2B	2.8750	...	2.7938	2.8048	0.0110	2.740	2.765	...	...	2.753	2.768
		3B	2.8750	...	2.7938	2.8020	0.0082	2.7400	2.7547	...	...	2.7532	2.7682
2 ⁷ / ₈ – 12 or 2.8750 – 12	UN	2B	2.8750	...	2.8209	2.8291	0.0082	2.785	2.803	...	...	2.794	2.804
		3B	2.8750	...	2.8209	2.8270	0.0061	2.7850	2.7948	...	...	2.7938	2.8038
2 ⁷ / ₈ – 16 or 2.8750 – 16	UN	2B	2.8750	...	2.8344	2.8417	0.0073	2.807	2.821	...	...	2.814	2.823
		3B	2.8750	...	2.8344	2.8399	0.0055	2.8070	2.8158	...	...	2.8141	2.8226
2 ⁷ / ₈ – 20 or 2.8750 – 20	UN	2B	2.8750	...	2.8425	2.8492	0.0067	2.821	2.832	...	...	2.826	2.833
		3B	2.8750	...	2.8425	2.8475	0.0050	2.8210	2.8287	...	...	2.8263	2.8331
3 – 4 or 3.0000 – 4	UNC	1B	3.0000	...	2.8376	2.8585	0.0209	2.729	2.767	...	...	...	...
		2B	3.0000	...	2.8376	2.8515	0.0139	2.729	2.767	...	...	2.756	2.786
		3B	3.0000	...	2.8376	2.8480	0.0104	2.7290	2.7594	...	...	2.7564	2.7864
3 – 6 or 3.0000 – 6	UN	2B	3.0000	...	2.8917	2.9038	0.0121	2.820	2.850	...	...	2.838	2.858
		3B	3.0000	...	2.8917	2.9008	0.0091	2.8200	2.8396	...	...	2.8376	2.8576
3 – 8 or 3.0000 – 8	UN	2B	3.0000	...	2.9188	2.9299	0.0111	2.865	2.890	...	...	2.878	2.893
		3B	3.0000	...	2.9188	2.9271	0.0083	2.8650	2.8797	...	...	2.8782	2.8932
3 – 12 or 3.0000 – 12	UN	2B	3.0000	...	2.9459	2.9541	0.0082	2.910	2.928	...	...	2.919	2.929
		3B	3.0000	...	2.9459	2.9521	0.0062	2.9100	2.9198	...	...	2.9188	2.9880
3 – 16 or 3.0000 – 16	UN	2B	3.0000	...	2.9594	2.9667	0.0073	2.932	2.946	...	...	2.939	2.948
		3B	3.0000	...	2.9594	2.9649	0.0055	2.9320	2.9408	...	...	2.9391	2.9476
3 – 20 or 3.0000 – 20	UN	2B	3.0000	...	2.9675	2.9743	0.0068	2.946	2.957	...	...	2.951	2.958
		3B	3.0000	...	2.9675	2.9726	0.0051	2.9460	2.9537	...	...	2.9513	2.9581
3 ¹ / ₈ – 4 or 3.1250 – 4	UN	2B	3.1250	...	2.9626	2.9766	0.0140	2.854	2.892	...	...	2.881	2.911
		3B	3.1250	...	2.9626	2.9731	0.0105	2.8540	2.8844	...	...	2.8814	2.9114

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

Nominal Size and Threads/in.			Major Diameter, <i>D</i>		Pitch Diameter, <i>D</i> ₂ , and Functional Diameter [Note (3)]			Minor Diameter, <i>D</i> ₁					
			Min.	Max. [Note (2)]	Min.	Max.	Tolerance, <i>TD</i> ₂	UN [Note (4)]		UNR [Note (5)]		UNJ	
								Min.	Max.	Min.	Max.	Min.	Max.
1	2	3	4	5	6	7	8	9	10	11	12	13	14
3 ¹ / ₈ – 6 or 3.1250 – 6	UN	2B	3.1250	...	3.0167	3.0289	0.0122	2.945	2.975	...	...	2.963	2.983
		3B	3.1250	...	3.0167	3.0259	0.0092	2.9450	2.9646	...	...	2.9626	2.9826
3 ¹ / ₈ – 8 or 3.1250 – 8	UN	2B	3.1250	...	3.0438	3.0550	0.0112	2.990	3.015	...	...	3.003	3.018
		3B	3.1250	...	3.0438	3.0522	0.0084	2.9900	3.0047	...	...	3.0032	3.0182
(6) 3 ¹ / ₈ – 12 or 3.1250 – 12	UN	2B	3.1250	...	3.0709	3.0792	0.0083	3.035	3.053	...	...	3.044	3.054
		3B	3.1250	...	3.0709	3.0771	0.0062	3.0350	3.0448	...	...	3.0438	3.0538
(6) 3 ¹ / ₈ – 16 or 3.1250 – 16	UN	2B	3.1250	...	3.0844	3.0918	0.0074	3.057	3.071	...	...	3.064	3.073
		3B	3.1250	...	3.0844	3.0899	0.0055	3.0570	3.0658	...	...	3.0641	3.0726
3 ¹ / ₄ – 4 or 3.2500 – 4	UNC	1B	3.2500	...	3.0876	3.1088	0.0212	2.979	3.017	...	...	...	...
		2B	3.2500	...	3.0876	3.1017	0.0141	2.979	3.017	...	...	3.006	3.036
		3B	3.2500	...	3.0876	3.0982	0.0106	2.9790	3.0094	...	...	3.0064	3.0364
3 ¹ / ₄ – 6 or 3.2500 – 6	UN	2B	3.2500	...	3.1417	3.1540	0.0123	3.070	3.100	...	...	3.088	3.108
		3B	3.2500	...	3.1417	3.1509	0.0092	3.0700	3.0896	...	...	3.0876	3.1076
3 ¹ / ₄ – 8 or 3.2500 – 8	UN	2B	3.2500	...	3.1688	3.1801	0.0113	3.115	3.140	...	...	3.128	3.143
		3B	3.2500	...	3.1688	3.1773	0.0085	3.1150	3.1297	...	...	3.1282	3.1432
(6) 3 ¹ / ₄ – 12 or 3.2500 – 12	UN	2B	3.2500	...	3.1959	3.2042	0.0083	3.160	3.178	...	...	3.169	3.179
		3B	3.2500	...	3.1959	3.2021	0.0062	3.1600	3.1698	...	...	3.1688	3.1788
(6) 3 ¹ / ₄ – 16 or 3.2500 – 16	UN	2B	3.2500	...	3.2094	3.2168	0.0074	3.182	3.196	...	...	3.189	3.198
		3B	3.2500	...	3.2094	3.2150	0.0056	3.1820	3.1908	...	...	3.1891	3.1976
3 ³ / ₈ – 4 or 3.3750 – 4	UN	2B	3.3750	...	3.2126	3.2268	0.0142	3.104	3.142	...	...	3.131	3.161
		3B	3.3750	...	3.2126	3.2233	0.0107	3.1040	3.1344	...	...	3.1314	3.1614
3 ³ / ₈ – 6 or 3.3750 – 6	UN	2B	3.3750	...	3.2667	3.2791	0.0124	3.195	3.225	...	...	3.213	3.233
		3B	3.3750	...	3.2667	3.2760	0.0093	3.1950	3.2146	...	...	3.2126	3.2326

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

Nominal Size and Threads/in.			Major Diameter, <i>D</i>		Pitch Diameter, <i>D</i> ₂ , and Functional Diameter [Note (3)]			Minor Diameter, <i>D</i> ₁					
			Min.	Max. [Note (2)]	Min.	Max.	Tolerance, <i>TD</i> ₂	UN [Note (4)]		UNR [Note (5)]		UNJ	
								Min.	Max.	Min.	Max.	Min.	Max.
1	2	3	4	5	6	7	8	9	10	11	12	13	14
3 ³ / ₈ – 8 or 3.3750 – 8	UN	2B	3.3750	...	3.2938	3.3052	0.0114	3.240	3.265	...	...	3.253	3.268
		3B	3.3750	...	3.2938	3.3023	0.0085	3.2400	3.2547	...	...	3.2532	3.2682
(6) 3 ³ / ₈ – 12 or 3.3750 – 12	UN	2B	3.3750	...	3.3209	3.3292	0.0083	3.285	3.303	...	...	3.294	3.304
		3B	3.3750	...	3.3209	3.3272	0.0063	3.2850	3.2948	...	...	3.2938	3.3038
(6) 3 ³ / ₈ – 16 or 3.3750 – 16	UN	2B	3.3750	...	3.3344	3.3419	0.0075	3.307	3.321	...	...	3.314	3.323
		3B	3.3750	...	3.3344	3.3400	0.0056	3.3070	3.3158	...	...	3.3141	3.3226
3 ¹ / ₂ – 4 or 3.5000 – 4	UNC	1B	3.5000	...	3.3376	3.3591	0.0215	3.229	3.267	...	...	...	...
		2B	3.5000	...	3.3376	3.3519	0.0143	3.229	3.267	...	...	3.256	3.286
		3B	3.5000	...	3.3376	3.3484	0.0108	3.2290	3.2594	...	...	3.2564	3.2864
3 ¹ / ₂ – 6 or 3.5000 – 6	UN	2B	3.5000	...	3.3917	3.4042	0.0125	3.320	3.350	...	...	3.338	3.358
		3B	3.5000	...	3.3917	3.4011	0.0094	3.3200	3.3396	...	...	3.3376	3.3576
3 ¹ / ₂ – 8 or 3.5000 – 8	UN	2B	3.5000	...	3.4188	3.4303	0.0115	3.365	3.390	...	...	3.378	3.393
		3B	3.5000	...	3.4188	3.4274	0.0086	3.3650	3.3797	...	...	3.3782	3.3932
3 ¹ / ₂ – 12 or 3.5000 – 12	UN	2B	3.5000	...	3.4459	3.4543	0.0084	3.410	3.428	...	...	3.419	3.429
		3B	3.5000	...	3.4459	3.4522	0.0063	3.4100	3.4198	...	...	3.4188	3.4288
(6) 3 ¹ / ₂ – 16 or 3.5000 – 16	UN	2B	3.5000	...	3.4594	3.4669	0.0075	3.432	3.446	...	...	3.439	3.448
		3B	3.5000	...	3.4594	3.4650	0.0056	3.4320	3.4408	...	...	3.4391	3.4476
3 ⁵ / ₈ – 4 or 3.6250 – 4	UN	2B	3.6250	...	3.4626	3.4770	0.0144	3.354	3.392	...	...	3.381	3.411
		3B	3.6250	...	3.4626	3.4734	0.0108	3.3540	3.3844	...	...	3.3814	3.4114
3 ⁵ / ₈ – 6 or 3.6250 – 6	UN	2B	3.6250	...	3.5167	3.5293	0.0126	3.445	3.475	...	...	3.463	3.483
		3B	3.6250	...	3.5167	3.5262	0.0095	3.4450	3.4646	...	...	3.4626	3.4826
3 ⁵ / ₈ – 8 or 3.6250 – 8	UN	2B	3.6250	...	3.5438	3.5554	0.0116	3.490	3.515	...	...	3.503	3.518
		3B	3.6250	...	3.5438	3.5525	0.0087	3.4900	3.5047	...	...	3.5032	3.5182

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Major Diameter, D		Pitch Diameter, D_2 , and Functional Diameter [Note (3)]			Minor Diameter, D_1					
			Min.	Max. [Note (2)]	Min.	Max.	Tolerance, TD_2	UN [Note (4)]		UNR [Note (5)]		UNJ	
								Min.	Max.	Min.	Max.	Min.	Max.
1	2	3	4	5	6	7	8	9	10	11	12	13	14
(6) $3\frac{5}{8}$ – 12 or 3.6250 – 12	UN	2B	3.6250	...	3.5709	3.5793	0.0084	3.535	3.553	...	...	3.544	3.554
12		3B	3.6250	...	3.5709	3.5772	0.0063	3.5350	3.5448	...	...	3.5438	3.5538
$3\frac{5}{8}$ – 16 or 3.6250 – 16	UN	2B	3.6250	...	3.5844	3.5919	0.0075	3.557	3.571	...	...	3.564	3.573
(6) 16		3B	3.6250	...	3.5844	3.5900	0.0056	3.5570	3.5658	...	...	3.5641	3.5726
$3\frac{3}{4}$ – 4 or 3.7500 – 4	UNC	1B	3.7500	...	3.5876	3.6094	0.0218	3.479	3.517	...	...	...	...
4		2B	3.7500	...	3.5876	3.6021	0.0145	3.479	3.517	...	...	3.506	3.536
4		3B	3.7500	...	3.5876	3.5985	0.0109	3.4790	3.5094	...	...	3.5064	3.5364
$3\frac{3}{4}$ – 6 or 3.7500 – 6	UN	2B	3.7500	...	3.6417	3.6544	0.0127	3.570	3.600	...	...	3.588	3.608
6		3B	3.7500	...	3.6417	3.6512	0.0095	3.5700	3.5896	...	...	3.5876	3.6076
$3\frac{3}{4}$ – 8 or 3.7500 – 8	UN	2B	3.7500	...	3.6688	3.6805	0.0117	3.615	3.640	...	...	3.628	3.643
8		3B	3.7500	...	3.6688	3.6776	0.0088	3.6150	3.6297	...	...	3.6282	3.6432
(6) $3\frac{3}{4}$ – 12 or 3.7500 – 12	UN	2B	3.7500	...	3.6959	3.7043	0.0084	3.660	3.678	...	...	3.669	3.679
(6) 12		3B	3.7500	...	3.6959	3.7022	0.0063	3.6600	3.6698	...	...	3.6688	3.6788
(6) $3\frac{3}{4}$ – 16 or 3.7500 – 16	UN	2B	3.7500	...	3.7094	3.7170	0.0076	3.682	3.696	...	...	3.689	3.698
(6) 16		3B	3.7500	...	3.7094	3.7151	0.0057	3.6820	3.6908	...	...	3.6891	3.6976
$3\frac{7}{8}$ – 4 or 3.8750 – 4	UN	2B	3.8750	...	3.7126	3.7272	0.0146	3.604	3.642	...	...	3.631	3.661
4		3B	3.8750	...	3.7126	3.7235	0.0109	3.6040	3.6344	...	...	3.6314	3.6614
$3\frac{7}{8}$ – 6 or 3.8750 – 6	UN	2B	3.8750	...	3.7667	3.7795	0.0128	3.695	3.725	...	...	3.713	3.733
6		3B	3.8750	...	3.7667	3.7763	0.0096	3.6950	3.7146	...	...	3.7126	3.7326
$3\frac{7}{8}$ – 8 or 3.8750 – 8	UN	2B	3.8750	...	3.7938	3.8056	0.0118	3.740	3.765	...	...	3.753	3.768
8		3B	3.8750	...	3.7938	3.8026	0.0088	3.7400	3.7547	...	...	3.7532	3.7682
$3\frac{7}{8}$ – 12 or 3.8750 – 12	UN	2B	3.8750	...	3.8209	3.8294	0.0085	3.785	3.803	...	...	3.794	3.804
12		3B	3.8750	...	3.8209	3.8273	0.0064	3.7850	3.7948	...	...	3.7938	3.8038

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Major Diameter, <i>D</i>		Pitch Diameter, <i>D</i> ₂ , and Functional Diameter [Note (3)]			Minor Diameter, <i>D</i> ₁					
			Min.	Max. [Note (2)]	Min.	Max.	Tolerance, <i>TD</i> ₂	UN [Note (4)]		UNR [Note (5)]		UNJ	
								Min.	Max.	Min.	Max.	Min.	Max.
1	2	3	4	5	6	7	8	9	10	11	12	13	14
(6) 3 ⁷ / ₈ – 16 or 3.8750 – 16	UN	2B	3.8750	...	3.8344	3.8420	0.0076	3.807	3.821	...	...	3.814	3.823
(6) 16		3B	3.8750	...	3.8344	3.8401	0.0057	3.8070	3.8158	...	...	3.8141	3.8226
4 – 4 or 4.0000 – 4	UNC	1B	4.0000	...	3.8376	3.8597	0.0221	3.729	3.767	...	...	...	...
4		2B	4.0000	...	3.8376	3.8523	0.0147	3.729	3.767	...	...	3.7560	3.7860
4		3B	4.0000	...	3.8376	3.8487	0.0111	3.7290	3.7594	...	...	3.7564	3.7864
4 – 6 or 4.0000 – 6	UN	2B	4.0000	...	3.8917	3.9046	0.0129	3.820	3.850	...	...	3.838	3.858
6		3B	4.0000	...	3.8917	3.9014	0.0097	3.8200	3.8396	...	...	3.8376	3.8576
4 – 8 or 4.0000 – 8	UN	2B	4.0000	...	3.9188	3.9307	0.0119	3.865	3.890	...	...	3.878	3.893
8		3B	4.0000	...	3.9188	3.9277	0.0089	3.8650	3.8797	...	...	3.8782	3.8932
4 – 12 or 4.0000 – 12	UN	2B	4.0000	...	3.9459	3.9544	0.0085	3.910	3.928	...	...	3.919	3.929
12		3B	4.0000	...	3.9459	3.9523	0.0064	3.9100	3.9198	...	...	3.9188	3.9288
4 – 16 or 4.0000 – 16	UN	2B	4.0000	...	3.9594	3.9670	0.0076	3.932	3.946	...	...	3.939	3.948
(6) 16		3B	4.0000	...	3.9594	3.9651	0.0057	3.9320	3.9408	...	...	3.9391	3.9476
4 ¹ / ₈ – 4 or 4.1250 – 4	UN	2B	4.1250	...	3.9626	3.9774	0.0148	3.854	3.892	...	...	3.881	3.911
4		3B	4.1250	...	3.9626	3.9738	0.0112	3.8540	3.8844	...	...	3.8814	3.9114
4 ¹ / ₈ – 6 or 4.1250 – 6	UN	2B	4.1250	...	4.0167	4.0297	0.0130	3.945	3.975	...	...	3.963	3.983
6		3B	4.1250	...	4.0167	4.0264	0.0097	3.9450	3.9646	...	...	3.9626	3.9826
4 ¹ / ₈ – 8 or 4.1250 – 8	UN	2B	4.1250	...	4.0438	4.0558	0.0120	3.990	4.015	...	...	4.003	4.018
8		3B	4.1250	...	4.0438	4.0528	0.0090	3.9900	4.0047	...	...	4.0032	4.0182
(6) 4 ¹ / ₈ – 12 or 4.1250 – 12	UN	2B	4.1250	...	4.0709	4.0794	0.0085	4.035	4.053	...	...	4.044	4.054
12		3B	4.1250	...	4.0709	4.0773	0.0064	4.0350	4.0448	...	...	4.0438	4.0538
(6) 4 ¹ / ₈ – 16 or 4.1250 – 16	UN	2B	4.1250	...	4.0844	4.0921	0.0077	4.057	4.071	...	...	4.064	4.073
(6) 16		3B	4.1250	...	4.0844	4.0901	0.0057	4.0570	4.0658	...	...	4.0641	4.0726

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

Nominal Size and Threads/in.			Major Diameter, <i>D</i>		Pitch Diameter, <i>D</i> ₂ , and Functional Diameter [Note (3)]			Minor Diameter, <i>D</i> ₁					
			Min.	Max. [Note (2)]	Min.	Max.	Tolerance, <i>TD</i> ₂	UN [Note (4)]		UNR [Note (5)]		UNJ	
								Min.	Max.	Min.	Max.	Min.	Max.
1	2	3	4	5	6	7	8	9	10	11	12	13	14
4 ¹ / ₄ – 4 or 4.2500 – 4	UNC	2B	4.2500	...	4.0876	4.1025	0.0149	3.979	4.017	...	...	4.006	4.036
			4	...	4.0876	4.0988	0.0112	3.9790	4.0094	...	...	4.0064	4.0364
4 ¹ / ₄ – 6 or 4.2500 – 6	UN	2B	4.2500	...	4.1417	4.1548	0.0131	4.070	4.100	...	...	4.088	4.108
			6	...	4.1417	4.1515	0.0098	4.0700	4.0896	...	...	4.0876	4.1076
(6) 4 ¹ / ₄ – 8 or 4.2500 – 8	UN	2B	4.2500	...	4.1688	4.1809	0.0121	4.115	4.140	...	...	4.128	4.143
			8	...	4.1688	4.1778	0.0090	4.1150	4.1297	...	...	4.1282	4.1432
(6) 4 ¹ / ₄ – 12 or 4.2500 – 12	UN	2B	4.2500	...	4.1959	4.2045	0.0086	4.160	4.178	...	...	4.169	4.179
			12	...	4.1959	4.2023	0.0064	4.1600	4.1698	...	...	4.1688	4.1788
(6) 4 ¹ / ₄ – 16 or 4.2500 – 16	UN	2B	4.2500	...	4.2094	4.2171	0.0077	4.182	4.196	...	...	4.189	4.198
			16	...	4.2094	4.2152	0.0058	4.1820	4.1908	...	...	4.1891	4.1976
4 ³ / ₈ – 4 or 4.3750 – 4	UN	2B	4.3750	...	4.2126	4.2276	0.0150	4.104	4.142	...	...	4.131	4.161
			4	...	4.2126	4.2239	0.0113	4.1040	4.1344	...	...	4.1314	4.1614
4 ³ / ₈ – 6 or 4.3750 – 6	UN	2B	4.3750	...	4.2667	4.2799	0.0132	4.195	4.225	...	...	4.213	4.233
			6	...	4.2667	4.2766	0.0099	4.1950	4.2146	...	...	4.2126	4.2326
(6) 4 ³ / ₈ – 8 or 4.3750 – 8	UN	2B	4.3750	...	4.2938	4.3059	0.0121	4.240	4.265	...	...	4.253	4.268
			8	...	4.2938	4.3029	0.0091	4.2400	4.2547	...	...	4.2532	4.2682
(6) 4 ³ / ₈ – 12 or 4.3750 – 12	UN	2B	4.3750	...	4.3209	4.3295	0.0086	4.285	4.303	...	...	4.294	4.304
			12	...	4.3209	4.3273	0.0064	4.2850	4.2948	...	...	4.2938	4.3038
(6) 4 ³ / ₈ – 16 or 4.3750 – 16	UN	2B	4.3750	...	4.3344	4.3421	0.0077	4.307	4.321	...	...	4.314	4.323
			16	...	4.3344	4.3402	0.0058	4.3070	4.3158	...	...	4.3141	4.3226
4 ¹ / ₂ – 4 or 4.5000 – 4	UNC	2B	4.5000	...	4.3376	4.3527	0.0151	4.229	4.267	...	...	4.256	4.286
			4	...	4.3376	4.3489	0.0113	4.2290	4.2594	...	...	4.2564	4.2864
4 ¹ / ₂ – 6 or 4.5000 – 6	UN	2B	4.5000	...	4.3917	4.4050	0.0133	4.320	4.350	...	...	4.338	4.358
			6	...	4.3917	4.4016	0.0099	4.3200	4.3396	...	...	4.3376	4.3576

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

Nominal Size and Threads/in.			Major Diameter, <i>D</i>		Pitch Diameter, <i>D</i> ₂ , and Functional Diameter [Note (3)]			Minor Diameter, <i>D</i> ₁					
			Min.	Max. [Note (2)]	Min.	Max.	Tolerance, <i>TD</i> ₂	UN [Note (4)]		UNR [Note (5)]		UNJ	
								Min.	Max.	Min.	Max.	Min.	Max.
1	2	3	4	5	6	7	8	9	10	11	12	13	14
4½ – 8 or 4.5000 – 8	UN	2B	4.5000	...	4.4188	4.4310	0.0122	4.365	4.390	...	...	4.378	4.393
		3B	4.5000	...	4.4188	4.4280	0.0092	4.3650	4.3797	...	...	4.3782	4.3932
(6) 4½ – 12 or 4.5000 – 12	UN	2B	4.5000	...	4.4459	4.4545	0.0086	4.410	4.428	...	...	4.419	4.429
		3B	4.5000	...	4.4459	4.4524	0.0065	4.4100	4.4198	...	...	4.4188	4.4288
(6) 4½ – 16 or 4.5000 – 16	UN	2B	4.5000	...	4.4594	4.4672	0.0078	4.432	4.446	...	...	4.439	4.448
		3B	4.5000	...	4.4594	4.4652	0.0058	4.4320	4.4408	...	...	4.4391	4.4476
4⅝ – 4 or 4.6250 – 4	UN	2B	4.6250	...	4.4626	4.4778	0.0152	4.354	4.392	...	...	4.381	4.411
		3B	4.6250	...	4.4626	4.4740	0.0114	4.3540	4.3844	...	...	4.3814	4.4114
4⅝ – 6 or 4.6250 – 6	UN	2B	4.6250	...	4.5167	4.5300	0.0133	4.445	4.475	...	...	4.463	4.483
		3B	4.6250	...	4.5167	4.5267	0.0100	4.4450	4.4646	...	...	4.4626	4.4826
(6) 4⅝ – 8 or 4.6250 – 8	UN	2B	4.6250	...	4.5438	4.5561	0.0123	4.490	4.515	...	...	4.503	4.518
		3B	4.6250	...	4.5438	4.5530	0.0092	4.4900	4.5047	...	...	4.5032	4.5182
(6) 4⅝ – 12 or 4.6250 – 12	UN	2B	4.6250	...	4.5709	4.5796	0.0087	4.535	4.553	...	...	4.544	4.554
		3B	4.6250	...	4.5709	4.5774	0.0065	4.5350	4.5448	...	...	4.5438	4.5538
(6) 4⅝ – 16 or 4.6250 – 16	UN	2B	4.6250	...	4.5844	4.5922	0.0078	4.557	4.571	...	...	4.564	4.573
		3B	4.6250	...	4.5844	4.5902	0.0058	4.5570	4.5658	...	...	4.5641	4.5726
4¾ – 4 or 4.7500 – 4	UNC	2B	4.7500	...	4.5876	4.6029	0.0153	4.479	4.517	...	...	4.506	4.536
		3B	4.7500	...	4.5876	4.5990	0.0114	4.4790	4.5094	...	...	4.5064	4.5364
4¾ – 6 or 4.7500 – 6	UN	2B	4.7500	...	4.6417	4.6551	0.0134	4.570	4.600	...	...	4.588	4.608
		3B	4.7500	...	4.6417	4.6518	0.0101	4.5700	4.5896	...	...	4.5876	4.6076
(6) 4¾ – 8 or 4.7500 – 8	UN	2B	4.7500	...	4.6688	4.6812	0.0124	4.615	4.640	...	...	4.628	4.643
		3B	4.7500	...	4.6688	4.6781	0.0093	4.6150	4.6297	...	...	4.6282	4.6432

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Major Diameter, D		Pitch Diameter, D_2 , and Functional Diameter [Note (3)]			Minor Diameter, D_1					
			Min.	Max. [Note (2)]	Min.	Max.	Tolerance, TD_2	UN [Note (4)]		UNR [Note (5)]		UNJ	
								Min.	Max.	Min.	Max.	Min.	Max.
1	2	3	4	5	6	7	8	9	10	11	12	13	14
(6) $4\frac{3}{4}$ – 12 or 4.7500 – 12	UN	2B	4.7500	...	4.6959	4.7046	0.0087	4.660	4.678	...	...	4.669	4.679
		3B	4.7500	...	4.6959	4.7024	0.0065	4.6600	4.6698	...	...	4.6688	4.6788
(6) $4\frac{3}{4}$ – 16 or 4.7500 – 16	UN	2B	4.7500	...	4.7094	4.7172	0.0078	4.682	4.696	...	...	4.689	4.698
		3B	4.7500	...	4.7094	4.7153	0.0059	4.6820	4.6908	...	...	4.6891	4.6976
$4\frac{3}{4}$ – 4 or 4.8750 – 4	UN	2B	4.8750	...	4.7126	4.7280	0.0154	4.604	4.642	...	...	4.631	4.661
		3B	4.8750	...	4.7126	4.7242	0.0116	4.6040	4.6344	...	...	4.6314	4.6614
$4\frac{7}{8}$ – 6 or 4.8750 – 6	UN	2B	4.8750	...	4.7667	4.7802	0.0135	4.695	4.725	...	...	4.713	4.733
		3B	4.8750	...	4.7667	4.7768	0.0101	4.6950	4.7146	...	...	4.7126	4.7326
$4\frac{7}{8}$ – 8 or 4.8750 – 8	UN	2B	4.8750	...	4.7938	4.8063	0.0125	4.740	4.765	...	...	4.753	4.768
		3B	4.8750	...	4.7938	4.8032	0.0094	4.7400	4.7547	...	...	4.7532	4.7682
(6) $4\frac{7}{8}$ – 12 or 4.8750 – 12	UN	2B	4.8750	...	4.8209	4.8296	0.0087	4.785	4.803	...	...	4.794	4.804
		3B	4.8750	...	4.8209	4.8274	0.0065	4.7850	4.7948	...	...	4.7938	4.8038
(6) $4\frac{7}{8}$ – 16 or 4.8750 – 16	UN	2B	4.8750	...	4.8344	4.8422	0.0078	4.807	4.821	...	...	4.814	4.823
		3B	4.8750	...	4.8344	4.8403	0.0059	4.8070	4.8158	...	...	4.8141	4.8226
5 – 4 or 5.0000 – 4	UNC	2B	5.0000	...	4.8376	4.8530	0.0154	4.729	4.767	...	...	4.756	4.786
		3B	5.0000	...	4.8376	4.8492	0.0116	4.7290	4.7594	...	...	4.7546	4.7864
5 – 6 or 5.0000 – 6	UN	2B	5.0000	...	4.8917	4.9053	0.0136	4.820	4.850	...	...	4.838	4.858
		3B	5.0000	...	4.8917	4.9019	0.0102	4.8200	4.8396	...	...	4.8376	4.8576
(6) 5 – 8 or 5.0000 – 8	UN	2B	5.0000	...	4.9188	4.9314	0.0126	4.865	4.890	...	...	4.878	4.893
		3B	5.0000	...	4.9188	4.9282	0.0094	4.8650	4.8797	...	...	4.8782	4.8932
5 – 12 or 5.0000 – 12	UN	2B	5.0000	...	4.9459	4.9546	0.0087	4.910	4.928	...	...	4.919	4.929
		3B	5.0000	...	4.9459	4.9525	0.0066	4.9100	4.9198	...	...	4.9188	4.9288
(6) 5 – 16 or 5.0000 – 16	UN	2B	5.0000	...	4.9594	4.9673	0.0079	4.932	4.946	...	...	4.939	4.948
		3B	5.0000	...	4.9594	4.9653	0.0059	4.9320	4.9408	...	...	4.9391	4.9476

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

					Major Diameter, <i>D</i>		Pitch Diameter, <i>D</i> ₂ , and Functional Diameter [Note (3)]			Minor Diameter, <i>D</i> ₁					
Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Min.	Max. [Note (2)]				UN [Note (4)]		UNR [Note (5)]		UNJ			
					Min.	Max.	Tolerance, <i>TD</i> ₂	Min.	Max.	Min.	Max.	Min.	Max.		
1	2	3	4	5	6	7	8	9	10	11	12	13	14		
5 ¹ / ₈ – 4 or 5.1250 – 4	UN	2B	5.1250	...	4.9626	4.9781	0.0155	4.854	4.892	...	...	4.881	4.911		
		3B	5.1250	...	4.9626	4.9743	0.0117	4.8540	4.8844	...	...	4.8814	4.9114		
5 ¹ / ₈ – 6 or 5.1250 – 6	UN	2B	5.1250	...	5.0167	5.0304	0.0137	4.945	4.975	...	...	4.963	4.983		
		3B	5.1250	...	5.0167	5.0270	0.0103	4.9450	4.9646	...	...	4.9626	4.9826		
(6) 5 ¹ / ₈ – 8 or 5.1250 – 8	UN	2B	5.1250	...	5.0438	5.0565	0.0127	4.990	5.015	...	...	5.003	5.018		
		3B	5.1250	...	5.0438	5.0533	0.0095	4.9900	5.0047	...	...	5.0032	5.0182		
(6) 5 ¹ / ₈ – 12 or 5.1250 – 12	UN	2B	5.1250	...	5.0709	5.0797	0.0088	5.035	5.053	...	...	5.044	5.054		
		3B	5.1250	...	5.0709	5.0775	0.0066	5.0350	5.0448	...	...	5.0438	5.0538		
(6) 5 ¹ / ₈ – 16 or 5.1250 – 16	UN	2B	5.1250	...	5.0844	5.0923	0.0079	5.057	5.071	...	...	5.064	5.073		
		3B	5.1250	...	5.0844	5.0903	0.0059	5.0570	5.0658	...	...	5.0641	5.0726		
5 ¹ / ₄ – 4 or 5.2500 – 4	UNC	2B	5.2500	...	5.0876	5.1032	0.0156	4.979	5.017	...	...	5.006	5.036		
		3B	5.2500	...	5.0876	5.0993	0.0117	4.9790	5.0094	...	...	5.0064	5.0364		
5 ¹ / ₄ – 6 or 5.2500 – 6	UN	2B	5.2500	...	5.1417	5.1555	0.0138	5.070	5.100	...	...	5.088	5.108		
		3B	5.2500	...	5.1417	5.1520	0.0103	5.0700	5.0896	...	...	5.0876	5.1076		
(6) 5 ¹ / ₈ – 8 or 5.2500 – 8	UN	2B	5.2500	...	5.1688	5.1815	0.0127	5.115	5.140	...	...	5.128	5.143		
		3B	5.2500	...	5.1688	5.1783	0.0095	5.1150	5.1297	...	...	5.1282	5.1432		
(6) 5 ¹ / ₈ – 12 or 5.2500 – 12	UN	2B	5.2500	...	5.1959	5.2047	0.0088	5.160	5.178	...	...	5.169	5.179		
		3B	5.2500	...	5.1959	5.2025	0.0066	5.1600	5.1698	...	...	5.1688	5.1788		
(6) 5 ¹ / ₄ – 16 or 5.2500 – 16	UN	2B	5.2500	...	5.2094	5.2173	0.0079	5.182	5.196	...	...	5.189	5.198		
		3B	5.2500	...	5.2094	5.2153	0.0059	5.1820	5.1908	...	...	5.1891	5.1976		
5 ³ / ₈ – 4 or 5.3875 – 4	UN	2B	5.3875	...	5.2251	5.2408	0.0157	5.117	5.154	...	...	5.144	5.174		
		3B	5.3875	...	5.2251	5.2368	0.0117	5.1170	5.1469	...	...	5.1439	5.1739		
5 ³ / ₈ – 6 or 5.3750 – 6	UN	2B	5.3750	...	5.2667	5.2805	0.0138	5.195	5.225	...	...	5.213	5.233		
		3B	5.3750	...	5.2667	5.2771	0.0104	5.1950	5.2146	...	...	5.2126	5.2326		

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Major Diameter, D		Pitch Diameter, D_2 , and Functional Diameter [Note (3)]			Minor Diameter, D_1					
			Min.	Max. [Note (2)]	Min.	Max.	Tolerance, TD_2	UN [Note (4)]		UNR [Note (5)]		UNJ	
								Min.	Max.	Min.	Max.	Min.	Max.
1	2	3	4	5	6	7	8	9	10	11	12	13	14
(6) $5\frac{3}{8}$ – 8 or 5.3750 – 8	UN	2B	5.3750	...	5.2938	5.3066	0.0128	5.240	5.265	...	...	5.253	5.268
(6) 8		3B	5.3750	...	5.2938	5.3034	0.0096	5.2400	5.2547	...	...	5.2532	5.2682
(6) $5\frac{3}{8}$ – 12 or 5.3750 – 12	UN	2B	5.3750	...	5.3209	5.3297	0.0088	5.285	5.303	...	...	5.294	5.304
(6) 12		3B	5.3750	...	5.3209	5.3275	0.0066	5.2850	5.2948	...	...	5.2938	5.3038
$5\frac{3}{8}$ – 16 or 5.3750 – 16	UN	2B	5.3750	...	5.3344	5.3423	0.0079	5.307	5.321	...	...	5.314	5.323
(6) 16		3B	5.3750	...	5.3344	5.3404	0.0060	5.3070	5.3158	...	...	5.3141	5.3226
$5\frac{1}{2}$ – 4 or 5.5000 – 4	UNC	2B	5.5000	...	5.3376	5.3534	0.0158	5.229	5.267	...	...	5.256	5.286
(6) 4		3B	5.5000	...	5.3376	5.3494	0.0118	5.2290	5.2594	...	...	5.2564	5.2864
$5\frac{1}{2}$ – 6 or 5.5000 – 6	UN	2B	5.5000	...	5.3917	5.4056	0.0139	5.320	5.350	...	...	5.338	5.358
(6) 6		3B	5.5000	...	5.3917	5.4021	0.0104	5.3200	5.3396	...	...	5.3376	5.3576
$5\frac{1}{2}$ – 8 or 5.5000 – 8	UN	2B	5.5000	...	5.4188	5.4317	0.0129	5.365	5.390	...	...	5.378	5.393
(6) 8		3B	5.5000	...	5.4188	5.4285	0.0097	5.3650	5.3797	...	...	5.3782	5.3932
(6) $5\frac{1}{2}$ – 12 or 5.5000 – 12	UN	2B	5.5000	...	5.4459	5.4548	0.0089	5.410	5.428	...	...	5.419	5.429
(6) 12		3B	5.5000	...	5.4459	5.4525	0.0066	5.4100	5.4198	...	...	5.4188	5.4288
(6) $5\frac{1}{2}$ – 16 or 5.5000 – 16	UN	2B	5.5000	...	5.4594	5.4674	0.0080	5.432	5.446	...	...	5.439	5.448
(6) 16		3B	5.5000	...	5.4594	5.4654	0.0060	5.4320	5.4408	...	...	5.4391	5.4476
$5\frac{5}{8}$ – 4 or 5.6250 – 4	UN	2B	5.6250	...	5.4626	5.4784	0.0158	5.354	5.392	...	...	5.381	5.411
(6) 4		3B	5.6250	...	5.4626	5.4744	0.0118	5.3540	5.3844	...	...	5.3814	5.4114
$5\frac{5}{8}$ – 6 or 5.6250 – 6	UN	2B	5.6250	...	5.5167	5.5307	0.0140	5.445	5.475	...	...	5.463	5.483
(6) 6		3B	5.6250	...	5.5167	5.5272	0.0105	5.4450	5.4646	...	...	5.4626	5.4826
$5\frac{5}{8}$ – 8 or 5.6250 – 8	UN	2B	5.6250	...	5.5438	5.5568	0.0130	5.490	5.515	...	...	5.503	5.518
(6) 8		3B	5.6250	...	5.5438	5.5535	0.0097	5.4900	5.5047	...	...	5.5032	5.5182
(6) $5\frac{5}{8}$ – 12 or 5.6250 – 12	UN	2B	5.6250	...	5.5709	5.5798	0.0089	5.535	5.553	...	...	5.544	5.554
(6) 12		3B	5.6250	...	5.5709	5.5776	0.0067	5.5350	5.5448	...	...	5.5438	5.5538

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Major Diameter, <i>D</i>		Pitch Diameter, <i>D</i> ₂ , and Functional Diameter [Note (3)]			Minor Diameter, <i>D</i> ₁					
			Min.	Max. [Note (2)]	Min.	Max.	Tolerance, <i>TD</i> ₂	UN [Note (4)]		UNR [Note (5)]		UNJ	
								Min.	Max.	Min.	Max.	Min.	Max.
1	2	3	4	5	6	7	8	9	10	11	12	13	14
(6) 5 ⁵ / ₈ – 16 or 5.6250 – 16	UN	2B	5.6250	...	5.5844	5.5924	0.0080	5.557	5.571	...	...	5.564	5.573
(6) 16		3B	5.6250	...	5.5844	5.5904	0.0060	5.5570	5.5658	...	...	5.5641	5.5726
5 ³ / ₄ – 4 or 5.7500 – 4	UNC	2B	5.7500	...	5.5876	5.6035	0.0159	5.479	5.517	...	...	5.506	5.536
4		3B	5.7500	...	5.5876	5.5995	0.0119	5.4790	5.5094	...	...	5.5064	5.5364
5 ³ / ₄ – 6 or 5.7500 – 6	UN	2B	5.7500	...	5.6417	5.6558	0.0141	5.570	5.600	...	...	5.588	5.608
6		3B	5.7500	...	5.6417	5.6523	0.0106	5.5700	5.5896	...	...	5.5876	5.6076
(6) 5 ³ / ₄ – 8 or 5.7500 – 8	UN	2B	5.7500	...	5.6688	5.6818	0.0130	5.615	5.640	...	...	5.628	5.643
8		3B	5.7500	...	5.6688	5.6786	0.0098	5.6150	5.6297	...	...	5.6282	5.6432
(6) 5 ³ / ₄ – 12 or 5.7500 – 12	UN	2B	5.7500	...	5.6959	5.7048	0.0089	5.660	5.678	...	...	5.669	5.679
(6) 12		3B	5.7500	...	5.6959	5.7026	0.0067	5.6600	5.6698	...	...	5.6688	5.6788
(6) 5 ³ / ₄ – 16 or 5.7500 – 16	UN	2B	5.7500	...	5.7094	5.7174	0.0080	5.682	5.696	...	...	5.689	5.698
(6) 16		3B	5.7500	...	5.7094	5.7154	0.0060	5.6820	5.6908	...	...	5.6891	5.6976
5 ⁷ / ₈ – 4 or 5.8750 – 4	UN	2B	5.8750	...	5.7126	5.7286	0.0160	5.604	5.642	...	...	5.631	5.661
4		3B	5.8750	...	5.7126	5.7246	0.0120	5.6040	5.6344	...	...	5.6314	5.6614
5 ⁷ / ₈ – 6 or 5.8750 – 6	UN	2B	5.8750	...	5.7667	5.7809	0.0142	5.695	5.725	...	...	5.713	5.733
6		3B	5.8750	...	5.7667	5.7773	0.0106	5.6950	5.7146	...	...	5.7126	5.7326
(6) 5 ⁷ / ₈ – 8 or 5.8750 – 8	UN	2B	5.8750	...	5.7938	5.8069	0.0131	5.740	5.765	...	...	5.753	5.768
8		3B	5.8750	...	5.7938	5.8036	0.0098	5.7400	5.7547	...	...	5.7532	5.7682
(6) 5 ⁷ / ₈ – 12 or 5.8750 – 12	UN	2B	5.8750	...	5.8209	5.8298	0.0089	5.785	5.803	...	...	5.794	5.804
12		3B	5.8750	...	5.8209	5.8276	0.0067	5.7850	5.7948	...	...	5.7938	5.8038
5 ⁷ / ₈ – 16 or 5.8750 – 16	UN	2B	5.8750	...	5.8344	5.8425	0.0081	5.807	5.821	...	...	5.814	5.823
(6) 16		3B	5.8750	...	5.8344	5.8404	0.0060	5.8070	5.8158	...	...	5.8141	5.8226

Table 2B
Limits of Size for Standard Series Internal Threads (UN and UNJ) (Cont'd)

Nominal Size and Threads/in.	Series Designation	Class [Note (1)]	Major Diameter, <i>D</i>		Pitch Diameter, <i>D</i> ₂ , and Functional Diameter [Note (3)]			Minor Diameter, <i>D</i> ₁					
			Min.	Max. [Note (2)]	Min.	Max.	Tolerance, <i>TD</i> ₂	UN [Note (4)]		UNR [Note (5)]		UNJ	
								Min.	Max.	Min.	Max.	Min.	Max.
1	2	3	4	5	6	7	8	9	10	11	12	13	14
6 – 4 or 6.0000 – 4	UN	2B	6.0000	...	5.8376	5.8537	0.0161	5.729	5.767	...	...	5.756	5.786
4		3B	6.0000	...	5.8376	5.8496	0.0120	5.7290	5.7594	...	...	5.7564	5.7864
6 – 6 or 6.0000 – 6	UN	2B	6.0000	...	5.8917	5.9059	0.0142	5.820	5.850	...	...	5.838	5.858
6		3B	6.0000	...	5.8917	5.9024	0.0107	5.8200	5.8396	...	...	5.8376	5.8576
(6) 6 – 8 or 6.0000 – 8	UN	2B	6.0000	...	5.9188	5.9320	0.0132	5.865	5.890	...	...	5.878	5.893
(6) 8		3B	6.0000	...	5.9188	5.9287	0.0099	5.8650	5.8797	...	...	5.8782	5.8932
6 – 12 or 6.0000 – 12	UN	2B	6.0000	...	5.9459	5.9549	0.0090	5.910	5.928	...	...	5.919	5.929
12		3B	6.0000	...	5.9459	5.9526	0.0067	5.9100	5.9198	...	...	5.9188	5.9288
6 – 16 or 6.0000 – 16	UN	2B	6.0000	...	5.9594	5.9675	0.0081	5.932	5.946	...	...	5.939	5.948
(6) 16		3B	6.0000	...	5.9594	5.9655	0.0061	5.9320	5.9408	...	...	5.9391	5.9476

GENERAL NOTES:

- (a) Series designation shown in column 2 indicates the UN thread form; however, the UNR or UNJ thread form may be specified.
 (b) Thread classes may be combined. See para. 4.1.

NOTES:

- (1) There is no Class 1B for the UNJ thread series.
 (2) Maximum major diameter, *D*, is not specified. See paras. 5.5 and 8.3.2(a).
 (3) See para. 5.2.1 for functional diameter.
 (4) Values for UN minor diameter are shown as three or four decimal places. See paras 8.3.2(e) and 8.3.2(f).
 (5) There is no UNR internal thread, only an external UNR that is intended to assemble with an internal UN thread.
 (6) One or more of the numbers listed in this row have been changed to correct for calculation and rounding errors. The original numbers from past issues of this Standard are listed in Nonmandatory Appendix E and are for reference only.
 (7) Formerly NF; tolerances and allowances are based on 1 diameter length of engagement.

5 SCREW THREAD ALLOWANCE AND TOLERANCE

5.1 Allowance

Allowance is specified only for Classes 1A and 2A external threads. For Class 1A threads, the purpose of the allowance is to preclude the possibility of surface-to-surface fit between mating parts and it cannot be used to accommodate plating or coating. For Class 2A threads, the allowance may be used to accommodate plating or coating. Allowance for Classes 1A and 2A is identical: it is based on Class 2A pitch diameter tolerance, Td_2 , for the respective series' standard length of engagement and is applicable for all lengths of engagement.

Formulas for allowance are given in [para. 5.8.1\(a\)](#). Applications of allowances to the basic thread form are shown in [Figures 5, 7, and 10](#).

EXAMPLE: 2.0625-12-UNS-2A

From [para. 5.8.1\(a\)](#): Allowance, $es = 0.300 Td_2$ (2A)

From [para. 5.2](#): Td_2 (2A) = 0.006070

Therefore, $es = 0.300 \times 0.006070 = 0.001821$, or 0.0018 in. when rounded.

5.2 Pitch Diameter Tolerance, All Classes

NOTE: Refer to [Table 1](#) for the standard series of diameter–pitch combinations. Allowances and tolerances for standard series threads are applied in [Tables 2A and 2B](#). All other diameter–pitch combinations are considered nonstandard. Allowances and tolerances for nonstandard threads must be calculated using the appropriate formulas contained in this Standard.

The pitch diameter tolerances for external threads specified for all classes of the UNC/UNRC/UNJC and UNF/UNRF/UNJF series are based on a length of engagement equal to the basic major (nominal) diameter and are applicable for lengths of engagement from 5 pitches up to 1.5 diameters. For the 4-UN/UNR/UNJ, 6-UN/UNR/UNJ, and 8-UN/UNR/UNJ series, the pitch diameter tolerances for external threads specified for all classes are based on a length of engagement equal to the basic major (nominal) diameter and are applicable for lengths of engagement up to 1.5 diameters.

The pitch diameter tolerances specified for external threads for all classes of the UNEF/UNREF/UNJEF, 12-UN/UNR/UNJ, 16-UN/UNR/UNJ, 20-UN/UNR/UNJ, 28-UN/UNR/UNJ, and 32-UN/UNR/UNJ series are based on a length of engagement of 9 pitches and are applicable for lengths of engagement from 5 pitches to 15 pitches.

The pitch diameter tolerances specified for internal threads for all classes of the UNC/UNJC and UNF/UNJF series are based on a length of engagement equal to the basic major (nominal) diameter and are applicable for lengths of engagement from 5 pitches up to 1.5 diameters. For the 4-UN/UNJ, 6-UN/UNJ, and 8-UN/UNJ series, the pitch diameter tolerances specified for internal threads for all classes are based on a length of engagement equal to the basic major (nominal) diameter

and are applicable for lengths of engagement up to 1.5 diameters.

The pitch diameter tolerances specified for internal threads for all classes of the UNEF/UNJEF, 12-UN/UNJ, 16-UN/UNJ, 20-UN/UNJ, 28-UN/UNJ, and 32-UN/UNJ series are based on a length of engagement of 9 pitches and are applicable for lengths of engagement from 5 pitches to 15 pitches.

The pitch diameter tolerances specified in [Table D-1](#) for all classes of the UNS series are based on a length of engagement of 9 pitches and are applicable for lengths of engagement from 5 pitches to 15 pitches.

Formulas for pitch diameter tolerance are given in [paras. 5.8.1\(c\) and 5.8.2\(b\)](#).

Applications of tolerances to the thread form are shown in [Figures 5 through 12](#).

For special threads, tolerances and allowances shall be computed from the formulas in [paras. 5.8.1 and 5.8.2](#). If the length of engagement is between 5 pitches and 15 pitches or is unknown, use 9 pitches in the applicable formulas. For all other lengths of engagement, use the known values.

EXAMPLE 1: 2.0625-12-UNS-2A (length of engagement, LE , not specified)

$$Td_2 = 0.0015 \sqrt[3]{D} + 0.0015 \sqrt{LE} + 0.015 \sqrt[3]{P^2}$$

$$Td_2 = 0.0015 \sqrt[3]{2.0625} + 0.0015 \sqrt{9P} + 0.015 \sqrt[3]{0.08333333^2}$$

$$Td_2 = 0.0015 \sqrt[3]{2.0625} + 0.0015 \sqrt{0.750} + 0.015 \sqrt[3]{0.83333333^2}$$

$$Td_2 = 0.001909 + 0.001299 + 0.002862$$

$$Td_2 = 0.006070$$

EXAMPLE 2: 2.0625-12-UNS-SE2A (18 pitches length of engagement, LE)

$$Td_2 = 0.0015 \sqrt[3]{D} + 0.0015 \sqrt{LE} + 0.015 \sqrt[3]{P^2}$$

$$Td_2 = 0.0015 \sqrt[3]{2.0625} + 0.0015 \sqrt{18P} + 0.015 \sqrt[3]{0.08333333^2}$$

$$Td_2 = 0.0015 \sqrt[3]{2.0625} + 0.0015 \sqrt{1.500} + 0.015 \sqrt[3]{0.08333333^2}$$

$$Td_2 = 0.001909 + 0.001837 + 0.002862$$

$$Td_2 = 0.006608$$

5.2.1 Functional Diameter. Functional diameter size includes the effects of all variations in pitch diameter, thread form, and profile. The variations in the individual thread characteristics such as flank angle, lead, taper, and roundness on a given thread cause the measurements of the pitch diameter and functional diameter to vary from one another on most threads. The pitch diameter and functional diameter on a given thread are equal to one another only when the thread form is perfect.

When required to inspect or evaluate the pitch diameter or the functional diameter or both for thread acceptance (see ASME B1.3), use the same limits of size for the appropriate thread size and class.

5.3 Special Lengths of Engagement, *LE*

Length of engagement is the actual length of thread that is engaged when internal and external mated threads are fully assembled, and is equal to the shorter of the two thread lengths.

For example, a $\frac{1}{2}$ -in.-wide threaded nut when fully assembled with a 2-in.-long threaded bolt has $\frac{1}{2}$ in. (0.500 in.) of thread engagement. However, a 2-in.-wide threaded nut when fully assembled with a $\frac{1}{2}$ -in.-long threaded bolt also has $\frac{1}{2}$ in. (0.500 in.) of thread engagement.

Length of engagement can have an effect on the functional diameter size (see [para 5.2.1](#)) due to the cumulative effects of variations in lead and flank angles (see [Table 3](#)). On internal threads these variations will reduce functional diameter size and on external threads they will increase it, resulting in a reduction in allowance (clearance) when assembled. The longer the engagement, the greater this effect, and the less the clearance can be. Using longer than standard lengths of engagements can result in the external and internal threads not assembling.

In many cases, part producers are required to manufacture only the internal thread or only the external thread without information about the corresponding thread length, so the length of engagement is unknown. In these cases, it may be necessary to obtain more information identifying the length of engagement so the proper formulas (for allowances or tolerances or both) and gaging are used to result in full assembly.

The allowances or tolerances or both as well as the resulting thread elements listed in [Tables 2A](#) and [2B](#) are for what are considered standard lengths of engagement as outlined in [para. 5.2](#). Special lengths of engagement are ones that are longer or shorter than those identified in [para. 5.2](#).

The required length of engagement may be the determining factor in the proper selection of thread allowances and tolerances. When design considerations require lengths of engagement less than or greater than those covered by the tables, the allowances or tolerances or both should be adjusted using formulas in [para 5.8](#). When using longer than standard lengths of engagement, it is particularly important that changes in allowances or tolerances or both be considered for external threads designated Class 3A or Class 2A coated to basic limits (see [para. 7.2](#)). This is because there is no allowance

as with a Class 2A (uncoated) thread and the functional effects of lead variation may prevent full assembly.

Determining the product or manufacturing specifications for special lengths of engagement is application dependent and is therefore outside the scope of this Standard. It is the responsibility of the designer of the parts to determine these specifications.

NOTE: Past editions of this Standard provided examples of how to handle special lengths of engagement. These were examples only and not requirements. Because of this, they are no longer part of this Standard and have been moved to [Nonmandatory Appendix F](#) for historical and reference purposes.

5.4 Minor Diameter Tolerance and Allowance for External Threads

The tolerance for minor diameter is for reference only. In dimensioning external threads, the minimum minor diameter is not specified, being established by the crest of an unworn tool. In practice, the minor diameter of an external thread is satisfactory when accepted by a gage or gaging method that represents the maximum material condition of the internal thread less the allowance, if any. A formula for the minor diameter tolerance of external threads is given in [para. 5.8.1\(d\)](#).

5.5 Major Diameter Tolerance for Internal Threads

The tolerance for major diameter is for reference only. In dimensioning internal threads, the maximum major diameter is not specified, being established by the crest of an unworn tool. In practice, the major diameter of an internal thread is satisfactory when accepted by a gage or gaging method that represents the maximum material condition of an external thread that has no allowance. A formula for the major diameter tolerance of internal threads is given in [para. 5.8.2\(a\)](#).

5.6 Minor Diameter Tolerance and Length of Engagement for Internal Threads

Formulas for the minor diameter tolerance for internal threads are given in [para. 5.8.2\(c\)](#).

Internal thread minor diameter tolerances are suitable for lengths of engagement up to 1.5 diameters. For applications having shorter or longer lengths of engagement, it may be advantageous to decrease or increase the tolerance as explained in [para. 5.6.1](#).

Table 3
Allowable Variations in Lead and Equivalent Change in Functional Diameter

Nominal Size and Threads/in.	Series Designation	External			Internal		
		Class	Allowable Variation in Lead, in. ($\pm$)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}Td_2$ (+)	Class	Allowable Variation in Lead, in. ($\pm$)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}TD_2$ (-)
1	2	3	4	5	6	7	8
0-80 or 0.0600-80	UNF	2A	0.00052	0.00090	2B	0.00066	0.00115
		3A	0.00038	0.00065	3B	0.00048	0.00085
1-64 or 0.0730-64	UNC	2A	0.00058	0.00100	2B	0.00075	0.00130
		3A	0.00043	0.00075	3B	0.00055	0.00095
1-72 or 0.0730-72	UNF	2A	0.00055	0.00095	2B	0.00072	0.00125
		3A	0.00040	0.00070	3B	0.00055	0.00095
2-56 or 0.0860-56	UNC	2A	0.00061	0.00105	2B	0.00081	0.00140
		3A	0.00046	0.00080	3B	0.00061	0.00105
2-64 or 0.0860-64	UNF	2A	0.00058	0.00100	2B	0.00078	0.00135
		3A	0.00043	0.00075	3B	0.00058	0.00100
3-48 or 0.0990-48	UNC	2A	0.00066	0.00115	2B	0.00087	0.00150
		3A	0.00049	0.00085	3B	0.00064	0.00110
3-56 or 0.0990-56	UNF	2A	0.00064	0.00110	2B	0.00081	0.00140
		3A	0.00046	0.00080	3B	0.00061	0.00105
4-40 or 0.1120-40	UNC	2A	0.00072	0.00125	2B	0.00095	0.00165
		3A	0.00055	0.00095	3B	0.00069	0.00120
4-48 or 0.1120-48	UNF	2A	0.00069	0.00120	2B	0.00089	0.00155
		3A	0.00052	0.00090	3B	0.00066	0.00115
5-40 or 0.1250-40	UNC	2A	0.00075	0.00130	2B	0.00095	0.00165
		3A	0.00055	0.00095	3B	0.00072	0.00125
5-44 or 0.1250-44	UNF	2A	0.00072	0.00125	2B	0.00092	0.00160
		3A	0.00055	0.00095	3B	0.00069	0.00120
6-32 or 0.1380-32	UNC	2A	0.00081	0.00140	2B	0.00107	0.00185
		3A	0.00061	0.00105	3B	0.00078	0.00135
6-40 or 0.1380-40	UNF	2A	0.00075	0.00130	2B	0.00098	0.00170
		3A	0.00058	0.00100	3B	0.00072	0.00125
8-32 or 0.1640-32	UNC	2A	0.00084	0.00145	2B	0.00110	0.00190
		3A	0.00064	0.00110	3B	0.00081	0.00140
8-36 or 0.1640-36	UNF	2A	0.00081	0.00140	2B	0.00104	0.00180
		3A	0.00061	0.00105	3B	0.00078	0.00135
10-24 or 0.1900-24	UNC	2A	0.00095	0.00165	2B	0.00124	0.00215
		3A	0.00072	0.00125	3B	0.00092	0.00160
10-32 or 0.1900-32	UNF	2A	0.00087	0.00150	2B	0.00113	0.00195
		3A	0.00066	0.00115	3B	0.00084	0.00145
12-24 or 0.2160-24	UNC	2A	0.00098	0.00170	2B	0.00127	0.00220
		3A	0.00075	0.00130	3B	0.00095	0.00165

Table 3
Allowable Variations in Lead and Equivalent Change in Functional Diameter (Cont'd)

Nominal Size and Threads/in.	Series Designation	External			Internal		
		Class	Allowable Variation in Lead, in. (±)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}Td_2$ (+)	Class	Allowable Variation in Lead, in. (±)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}TD_2$ (-)
1	2	3	4	5	6	7	8
12-28 or 0.2160-28	UNF	2A	0.00092	0.00160	2B	0.00121	0.00210
		3A	0.00069	0.00120	3B	0.00089	0.00155
12-32 or 0.2160-32	UNEF	2A	0.00089	0.00155	2B	0.00118	0.00205
		3A	0.00069	0.00120	3B	0.00089	0.00155
$\frac{1}{4}$ -20 or 0.2500-20	UNC	1A	0.00162	0.00280	1B	0.00211	0.00365
		2A	0.00107	0.00185	2B	0.00141	0.00245
		3A	0.00081	0.00140	3B	0.00104	0.00180
$\frac{1}{4}$ -28 or 0.2500-28	UNF	1A	0.00144	0.00250	1B	0.00188	0.00325
		2A	0.00095	0.00165	2B	0.00124	0.00215
		3A	0.00072	0.00125	3B	0.00092	0.00160
$\frac{1}{4}$ -32 or 0.2500-32	UNEF	2A	0.00092	0.00160	2B	0.00121	0.00210
		3A	0.00069	0.00120	3B	0.00089	0.00155
$\frac{5}{16}$ -18 or 0.3125-18	UNC	1A	0.00176	0.00305	1B	0.00223	0.00395
		2A	0.00115	0.00200	2B	0.00153	0.00265
		3A	0.00087	0.00150	3B	0.00113	0.00195
$\frac{5}{16}$ -20 or 0.3125-20	UN	2A	0.00115	0.00200	2B	0.0015	0.00260
		3A	0.00087	0.00150	3B	0.00113	0.00195
$\frac{5}{16}$ -24 or 0.3125-24	UNF	1A	0.00159	0.00275	1B	0.00205	0.00355
		2A	0.00107	0.00185	2B	0.00139	0.00240
		3A	0.00078	0.00135	3B	0.00104	0.00180
$\frac{5}{16}$ -28 or 0.3125-28	UN	2A	0.00098	0.00170	2B	0.00127	0.00220
		3A	0.00075	0.00130	3B	0.00095	0.00165
$\frac{5}{16}$ -32 or 0.3125-32	UNEF	2A	0.00092	0.00160	2B	0.00121	0.00210
		3A	0.00069	0.00120	3B	0.00089	0.00155
$\frac{3}{8}$ -16 or 0.3750-16	UNC	1A	0.00188	0.00325	1B	0.00245	0.00425
		2A	0.00127	0.00220	2B	0.00165	0.00285
		3A	0.00095	0.00165	3B	0.00124	0.00215
$\frac{3}{8}$ -20 or 0.3750-20	UN	2A	0.00118	0.00205	2B	0.00156	0.00270
		3A	0.00089	0.00155	3B	0.00115	0.00200
$\frac{3}{8}$ -24 or 0.3750-24	UNF	1A	0.00165	0.00285	1B	0.00214	0.00370
		2A	0.00110	0.00190	2B	0.00141	0.00245
		3A	0.00084	0.00145	3B	0.00107	0.00185
$\frac{3}{8}$ -28 or 0.3750-28	UN	2A	0.00104	0.00180	2B	0.00133	0.00230
		3A	0.00078	0.00135	3B	0.00101	0.00175
$\frac{3}{8}$ -32 or 0.3750-32	UNEF	2A	0.00098	0.00170	2B	0.00127	0.00220
		3A	0.00072	0.00125	3B	0.00095	0.00165

Table 3
Allowable Variations in Lead and Equivalent Change in Functional Diameter (Cont'd)

Nominal Size and Threads/in.	Series Designation	External			Internal		
		Class	Allowable Variation in Lead, in. ($\pm$)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}Td_2$ (+)	Class	Allowable Variation in Lead, in. ($\pm$)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}TD_2$ (-)
1	2	3	4	5	6	7	8
$\frac{7}{16}$ -14 or 0.4375-14	UNC	1A	0.00205	0.00355	1B	0.00266	0.00460
		2A	0.00136	0.00235	2B	0.00176	0.00305
		3A	0.00101	0.00175	3B	0.00133	0.00230
$\frac{7}{16}$ -16 or 0.4375-16	UN	2A	0.00133	0.00230	2B	0.0017	0.00295
		3A	0.00098	0.00170	3B	0.00130	0.00225
$\frac{7}{16}$ -20 or 0.4375-20	UNF	1A	0.00182	0.00315	1B	0.00234	0.00405
		2A	0.00121	0.00210	2B	0.00156	0.00270
		3A	0.00089	0.00155	3B	0.00118	0.00205
$\frac{7}{16}$ -28 or 0.4375-28	UNEF	2A	0.00104	0.00180	2B	0.00133	0.00230
		3A	0.00078	0.00135	3B	0.00101	0.00175
$\frac{7}{16}$ -32 or 0.4375-32	UN	2A	0.00098	0.00170	2B	0.00127	0.00220
		3A	0.00072	0.00125	3B	0.00095	0.00165
$\frac{1}{2}$ -13 or 0.5000-13	UNC	1A	0.00214	0.00370	1B	0.00280	0.00485
		2A	0.00144	0.00250	2B	0.00188	0.00325
		3A	0.00107	0.00185	3B	0.00139	0.00240
$\frac{1}{2}$ -16 or 0.5000-16	UN	2A	0.00136	0.00235	2B	0.00176	0.00305
		3A	0.00101	0.00175	3B	0.00133	0.00230
$\frac{1}{2}$ -20 or 0.5000-20	UNF	1A	0.00185	0.00320	1B	0.00242	0.00420
		2A	0.00124	0.00215	2B	0.00162	0.00280
		3A	0.00092	0.00160	3B	0.00121	0.00210
$\frac{1}{2}$ -28 or 0.5000-28	UNEF	2A	0.00107	0.00185	2B	0.00139	0.00240
		3A	0.00081	0.00140	3B	0.00104	0.0018
$\frac{1}{2}$ -32 or 0.5000-32	UN	2A	0.00101	0.00175	2B	0.00130	0.00225
		3A	0.00075	0.00130	3B	0.00098	0.00170
$\frac{9}{16}$ -12 or 0.5625-12	UNC	1A	0.00225	0.00390	1B	0.00294	0.00510
		2A	0.00150	0.00260	2B	0.00196	0.00340
		3A	0.00113	0.00195	3B	0.00147	0.00255
$\frac{9}{16}$ -16 or 0.5625-16	UN	2A	0.00136	0.00235	2B	0.00176	0.00305
		3A	0.00101	0.00175	3B	0.00133	0.00230
$\frac{9}{16}$ -18 or 0.5625-18	UNF	1A	0.00196	0.00340	1B	0.00257	0.00445
		2A	0.00130	0.00225	2B	0.00170	0.00295
		3A	0.00098	0.00170	3B	0.00127	0.00220
$\frac{9}{16}$ -20 or 0.5625-20	UN	2A	0.00121	0.00210	2B	0.00159	0.00275
		3A	0.00092	0.00160	3B	0.00118	0.00205
$\frac{9}{16}$ -24 or 0.5625-24	UNEF	2A	0.00113	0.00195	2B	0.00147	0.00255
		3A	0.00084	0.00145	3B	0.00110	0.00190
$\frac{9}{16}$ -28 or 0.5625-28	UN	2A	0.00107	0.00185	2B	0.00139	0.00240
		3A	0.00081	0.00140	3B	0.00104	0.00180

Table 3
Allowable Variations in Lead and Equivalent Change in Functional Diameter (Cont'd)

Nominal Size and Threads/in.	Series Designation	External			Internal		
		Class	Allowable Variation in Lead, in. (±)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}Td_2$ (+)	Class	Allowable Variation in Lead, in. (±)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}TD_2$ (-)
1	2	3	4	5	6	7	8
$\frac{9}{16}$ -32 or 0.5625-32	UN	2A	0.00101	0.00175	2B	0.00130	0.00225
		3A	0.00075	0.00130	3B	0.00098	0.00170
$\frac{5}{8}$ -11 or 0.6250-11	UNC	1A	0.00240	0.00415	1B	0.00309	0.00535
		2A	0.00159	0.00275	2B	0.00208	0.00360
		3A	0.00118	0.00205	3B	0.00156	0.00270
$\frac{5}{8}$ -12 or 0.6250-12	UN	2A	0.00156	0.00270	2B	0.00205	0.00355
		3A	0.00118	0.00205	3B	0.00153	0.00265
$\frac{5}{8}$ -16 or 0.6250-16	UN	2A	0.00139	0.00240	2B	0.00179	0.00310
		3A	0.00104	0.00180	3B	0.00133	0.00230
$\frac{5}{8}$ -18 or 0.6250-18	UNF	1A	0.00202	0.00350	1B	0.00263	0.00455
		2A	0.00136	0.00235	2B	0.00173	0.00300
		3A	0.00101	0.00175	3B	0.00130	0.00255
$\frac{5}{8}$ -20 or 0.6250-20	UN	2A	0.00124	0.00215	2B	0.00162	0.00280
		3A	0.00092	0.00160	3B	0.00121	0.00210
$\frac{5}{8}$ -24 or 0.6250-24	UNEF	2A	0.00115	0.00200	2B	0.00150	0.00260
		3A	0.00087	0.00150	3B	0.00113	0.00195
$\frac{5}{8}$ -28 or 0.6250-28	UN	2A	0.00110	0.00190	2B	0.00141	0.00245
		3A	0.00081	0.00140	3B	0.00107	0.00185
$\frac{5}{8}$ -32 or 0.6250-32	UN	2A	0.00104	0.00180	2B	0.00133	0.00230
		3A	0.00078	0.00135	3B	0.00101	0.00175
$\frac{11}{16}$ -12 or 0.6875-12	UN	2A	0.00156	0.00270	2B	0.00205	0.00355
		3A	0.00118	0.00205	3B	0.00153	0.00265
$\frac{11}{16}$ -16 or 0.6875-16	UN	2A	0.00139	0.00240	2B	0.00179	0.00310
		3A	0.00104	0.00130	3B	0.00133	0.00230
$\frac{11}{16}$ -20 or 0.6875-20	UN	2A	0.00124	0.00215	2B	0.00162	0.00280
		3A	0.00092	0.00160	3B	0.00121	0.00210
$\frac{11}{16}$ -24 or 0.6875-24	UNEF	2A	0.00115	0.00200	2B	0.00150	0.00260
		3A	0.00087	0.00150	3B	0.00113	0.00195
$\frac{11}{16}$ -28 or 0.6875-28	UN	2A	0.00110	0.00190	2B	0.00141	0.00245
		3A	0.00081	0.00140	3B	0.00107	0.00185
$\frac{11}{16}$ -32 or 0.6875-32	UN	2A	0.00104	0.00180	2B	0.00133	0.00230
		3A	0.00078	0.00135	3B	0.00101	0.00175
$\frac{3}{4}$ -10 or 0.7500-10	UNC	1A	0.00254	0.00440	1B	0.00332	0.00575
		2A	0.00170	0.00295	2B	0.00222	0.00385
		3A	0.00127	0.00220	3B	0.00165	0.00285
$\frac{3}{4}$ -12 or 0.7500-12	UN	2A	0.00159	0.00275	2B	0.00208	0.00360
		3A	0.00118	0.00205	3B	0.00156	0.00270

Table 3
Allowable Variations in Lead and Equivalent Change in Functional Diameter (Cont'd)

Nominal Size and Threads/in.	Series Designation	External			Internal		
		Class	Allowable Variation in Lead, in. ($\pm$)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}Td_2$ (+)	Class	Allowable Variation in Lead, in. ($\pm$)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}TD_2$ (-)
1	2	3	4	5	6	7	8
$\frac{3}{4}$ -16 or 0.7500-16	UNF	1A	0.00217	0.00375	1B	0.00283	0.00490
		2A	0.00144	0.00250	2B	0.00188	0.00325
		3A	0.00110	0.00190	3B	0.00141	0.00245
$\frac{3}{4}$ -20 or 0.7500-20	UNEF	2A	0.00127	0.00220	2B	0.00165	0.00285
		3A	0.00095	0.00165	3B	0.00124	0.00215
$\frac{3}{4}$ -28 or 0.7500-28	UN	2A	0.00110	0.00190	2B	0.00144	0.00250
		3A	0.00084	0.00145	3B	0.00107	0.00185
$\frac{3}{4}$ -32 or 0.7500-32	UN	2A	0.00104	0.00180	2B	0.00136	0.00235
		3A	0.00078	0.00135	3B	0.00104	0.00180
$\frac{13}{16}$ -12 or 0.8125-12	UN	2A	0.00159	0.00275	2B	0.00208	0.00360
		3A	0.00118	0.00205	3B	0.00156	0.00270
$\frac{13}{16}$ -16 or 0.8125-16	UN	2A	0.00141	0.00245	2B	0.00182	0.00315
		3A	0.00104	0.00180	3B	0.00136	0.00235
$\frac{13}{16}$ -20 or 0.8125-20	UNEF	2A	0.00127	0.00220	2B	0.00165	0.00285
		3A	0.00095	0.00165	3B	0.00124	0.00215
$\frac{13}{16}$ -28 or 0.8125-28	UN	2A	0.00110	0.00190	2B	0.00144	0.00250
		3A	0.00084	0.00145	3B	0.00107	0.00185
$\frac{13}{16}$ -32 or 0.8125-32	UN	2A	0.00104	0.00180	2B	0.00136	0.00235
		3A	0.00078	0.00135	3B	0.00104	0.00180
$\frac{7}{8}$ -9 or 0.8750-9	UNC	1A	0.00274	0.00475	1B	0.00355	0.00615
		2A	0.00182	0.00315	2B	0.00237	0.00410
		3A	0.00136	0.00235	3B	0.00176	0.00305
$\frac{7}{8}$ -12 or 0.8750-12	UN	2A	0.00159	0.00275	2B	0.00208	0.00360
		3A	0.00118	0.00205	3B	0.00156	0.00270
$\frac{7}{8}$ -14 or 0.8750-14	UNF	1A	0.00234	0.00405	1B	0.00306	0.00530
		2A	0.00156	0.00270	2B	0.00202	0.00350
		3A	0.00118	0.00205	3B	0.00153	0.00265
$\frac{7}{8}$ -16 or 0.8750-16	UN	2A	0.00141	0.00245	2B	0.00182	0.00315
		3A	0.00104	0.00180	3B	0.00136	0.00235
$\frac{7}{8}$ -20 or 0.8750-20	UNEF	2A	0.00127	0.00220	2B	0.00165	0.00285
		3A	0.00095	0.00165	3B	0.00124	0.00215
$\frac{7}{8}$ -28 or 0.8750-28	UN	2A	0.00110	0.00190	2B	0.00144	0.00250
		3A	0.00084	0.00145	3B	0.00107	0.00185
$\frac{7}{8}$ -32 or 0.8750-32	UN	2A	0.00104	0.00180	2B	0.00136	0.00235
		3A	0.00078	0.00135	3B	0.00104	0.00180
$\frac{15}{16}$ -12 or 0.9375-12	UN	2A	0.00165	0.00255	2B	0.00214	0.00370
		3A	0.00121	0.00210	3B	0.00159	0.00275

Table 3
Allowable Variations in Lead and Equivalent Change in Functional Diameter (Cont'd)

Nominal Size and Threads/in.	Series Designation	External			Internal		
		Class	Allowable Variation in Lead, in. (±)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}Td_2$ (+)	Class	Allowable Variation in Lead, in. (±)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}TD_2$ (-)
1	2	3	4	5	6	7	8
$\frac{15}{16}$ -16 or 0.9375-16	UN	2A	0.00144	0.00250	2B	0.00188	0.00325
		3A	0.00107	0.00185	3B	0.00141	0.00245
$\frac{15}{16}$ -20 or 0.9375-20	UNEF	2A	0.00130	0.00225	2B	0.00170	0.00295
		3A	0.00098	0.00170	3B	0.00127	0.00220
$\frac{15}{16}$ -28 or 0.9375-28	UN	2A	0.00115	0.00200	2B	0.00150	0.00260
		3A	0.00087	0.00150	3B	0.00113	0.00195
$\frac{15}{16}$ -32 or 0.9375-32	UN	2A	0.00110	0.00190	2B	0.00141	0.00245
		3A	0.00081	0.00140	3B	0.00107	0.00185
1-8 or 1.0000-8	UNC	1A	0.00292	0.00505	1B	0.00381	0.0066
		2A	0.00196	0.00340	2B	0.00254	0.00440
		3A	0.00147	0.00255	3B	0.00191	0.00330
1-12 or 1.0000-12	UNF	1A	0.00254	0.00440	1B	0.00329	0.00570
		2A	0.0017	0.00295	2B	0.00219	0.00380
		3A	0.00127	0.00220	3B	0.00165	0.00285
1-14 or 1.0000-14	UNS	1A	0.00242	0.00420	1B	0.00315	0.00545
		2A	0.00162	0.00280	2B	0.00211	0.00365
		3A	0.00121	0.00210	3B	0.00156	0.00270
1-16 or 1.0000-16	UN	2A	0.00144	0.00250	2B	0.00188	0.00325
		3A	0.00107	0.001850	3B	0.00141	0.00245
1-20 or 1.0000-20	UNEF	2A	0.0013	0.00225	2B	0.00170	0.00295
		3A	0.00098	0.00170	3B	0.00127	0.00220
1-28 or 1.0000-28	UN	2A	0.00115	0.00200	2B	0.00150	0.00260
		3A	0.00087	0.00150	3B	0.00113	0.00195
1-32 or 1.0000-32	UN	2A	0.00110	0.00190	2B	0.00141	0.00245
		3A	0.00081	0.00140	3B	0.00107	0.00185
$1\frac{1}{16}$ -8 or 1.0625-8	UN	2A	0.00196	0.00340	2B	0.00257	0.00445
		3A	0.00147	0.00255	3B	0.00193	0.00335
$1\frac{1}{16}$ -12 or 1.0625-12	UN	2A	0.00165	0.00285	2B	0.00214	0.00370
		3A	0.00121	0.00210	3B	0.00159	0.00275
$1\frac{1}{16}$ -16 or 1.0625-16	UN	2A	0.00144	0.00250	2B	0.00188	0.00325
		3A	0.00107	0.00185	3B	0.00141	0.00245
$1\frac{1}{16}$ -18 or 1.0625-18	UNEF	2A	0.00136	0.00235	2B	0.00179	0.00310
		3A	0.00104	0.00180	3B	0.00133	0.00230
$1\frac{1}{16}$ -20 or 1.0625-20	UN	2A	0.00130	0.00225	2B	0.00170	0.00295
		3A	0.00098	0.00170	3B	0.00127	0.00220
$1\frac{1}{16}$ -28 or 1.0625-28	UN	2A	0.00115	0.00200	2B	0.00150	0.00260
		3A	0.00087	0.00150	3B	0.00113	0.00195

Table 3
Allowable Variations in Lead and Equivalent Change in Functional Diameter (Cont'd)

Nominal Size and Threads/in.	Series Designation	External			Internal		
		Class	Allowable Variation in Lead, in. ($\pm$)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}Td_2$ (+)	Class	Allowable Variation in Lead, in. ($\pm$)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}TD_2$ (-)
1	2	3	4	5	6	7	8
1 $\frac{1}{8}$ -7 or 1.1250-7	UNC	1A	0.00315	0.00545	1B	0.00407	0.00705
		2A	0.00208	0.00360	2B	0.00271	0.00470
		3A	0.00156	0.00270	3B	0.00205	0.00355
1 $\frac{1}{8}$ -8 or 1.1250-8	UN	2A	0.00199	0.00345	2B	0.00260	0.00450
		3A	0.00150	0.00260	3B	0.00193	0.00335
1 $\frac{1}{8}$ -12 or 1.1250-12	UNF	1A	0.00260	0.00450	1B	0.00338	0.00585
		2A	0.00173	0.00300	2B	0.00225	0.00390
		3A	0.00130	0.00225	3B	0.00170	0.00295
1 $\frac{1}{8}$ -16 or 1.1250-16	UN	2A	0.00144	0.00250	2B	0.00188	0.00325
		3A	0.00107	0.00185	3B	0.00141	0.00245
1 $\frac{1}{8}$ -18 or 1.1250-18	UNEF	2A	0.00136	0.00235	2B	0.00179	0.00310
		3A	0.00104	0.00180	3B	0.00133	0.00230
1 $\frac{1}{8}$ -20 or 1.1250-20	UN	2A	0.00130	0.00225	2B	0.00170	0.00295
		3A	0.00098	0.00170	3B	0.00127	0.00220
1 $\frac{1}{8}$ -28 or 1.1250-28	UN	2A	0.00115	0.00200	2B	0.0015	0.00260
		3A	0.00087	0.00150	3B	0.00113	0.00195
1 $\frac{3}{16}$ -8 or 1.1875-8	UN	2A	0.00202	0.00350	2B	0.00263	0.00455
		3A	0.00150	0.00260	3B	0.00196	0.00340
1 $\frac{3}{16}$ -12 or 1.1875-12	UN	2A	0.00167	0.00290	2B	0.00217	0.00375
		3A	0.00124	0.002150	3B	0.00162	0.00280
1 $\frac{3}{16}$ -16 or 1.1875-16	UN	2A	0.00147	0.002550	2B	0.00191	0.00330
		3A	0.00110	0.00190	3B	0.00144	0.00250
1 $\frac{3}{16}$ -18 or 1.1875-18	UNEF	2A	0.00141	0.00245	2B	0.00182	0.00315
		3A	0.00104	0.00180	3B	0.00136	0.00235
1 $\frac{3}{16}$ -20 or 1.1875-20	UN	2A	0.00136	0.00235	2B	0.00176	0.00305
		3A	0.00101	0.00175	3B	0.00130	0.00225
1 $\frac{3}{16}$ -28 or 1.1875-28	UN	2A	0.00118	0.00205	2B	0.00153	0.00265
		3A	0.00089	0.00155	3B	0.00115	0.00200
1 $\frac{1}{4}$ -7 or 1.2500-7	UNC	1A	0.00320	0.00555	1B	0.00416	0.00720
		2A	0.00214	0.00370	2B	0.00277	0.00480
		3A	0.00159	0.00275	3B	0.00208	0.00360
1 $\frac{1}{4}$ -8 or 1.2500-8	UN	2A	0.00202	0.00350	2B	0.00266	0.00460
		3A	0.00153	0.00265	3B	0.00199	0.00345
1 $\frac{1}{4}$ -12 or 1.2500-12	UNF	1A	0.00266	0.00460	1B	0.00346	0.00600
		2A	0.00179	0.00310	2B	0.00231	0.00400
		3A	0.00133	0.00230	3B	0.00173	0.00300
1 $\frac{1}{4}$ -16 or 1.2500-16	UN	2A	0.00147	0.00255	2B	0.00191	0.00330
		3A	0.00100	0.00190	3B	0.00144	0.00250

Table 3
Allowable Variations in Lead and Equivalent Change in Functional Diameter (Cont'd)

Nominal Size and Threads/in.	Series Designation	External			Internal		
		Class	Allowable Variation in Lead, in. ($\pm$)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}Td_2$ (+)	Class	Allowable Variation in Lead, in. ($\pm$)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}TD_2$ (-)
1	2	3	4	5	6	7	8
1 $\frac{1}{4}$ -18 or 1.2500-18	UNEF	2A	0.00141	0.00245	2B	0.00182	0.00315
		3A	0.00104	0.00180	3B	0.00136	0.00235
1 $\frac{1}{4}$ -20 or 1.2500-20	UN	2A	0.00136	0.00235	2B	0.00176	0.00305
		3A	0.00101	0.00175	3B	0.00130	0.00225
1 $\frac{1}{4}$ -28 or 1.2500-28	UN	2A	0.00118	0.00205	2B	0.00153	0.00265
		3A	0.00089	0.00155	3B	0.00115	0.00200
1 $\frac{5}{16}$ -8 or 1.3125-8	UN	2A	0.00205	0.00355	2B	0.00266	0.00460
		3A	0.00153	0.00265	3B	0.00199	0.00345
1 $\frac{5}{16}$ -12 or 1.3125-12	UN	2A	0.00167	0.00290	2B	0.00217	0.00375
		3A	0.00124	0.00215	3B	0.00162	0.00280
1 $\frac{5}{16}$ -16 or 1.3125-16	UN	2A	0.00147	0.00255	2B	0.00191	0.00330
		3A	0.00110	0.00190	3B	0.00144	0.00250
1 $\frac{5}{16}$ -18 or 1.3125-18	UNEF	2A	0.00141	0.00245	2B	0.00182	0.00315
		3A	0.00104	0.00180	3B	0.00136	0.00235
1 $\frac{5}{16}$ -20 or 1.3125-20	UN	2A	0.00136	0.00235	2B	0.00176	0.00305
		3A	0.00101	0.00175	3B	0.00130	0.00225
1 $\frac{5}{16}$ -28 or 1.3125-28	UN	2A	0.00118	0.00205	2B	0.00153	0.00265
		3A	0.00089	0.00155	3B	0.00115	0.00200
1 $\frac{3}{8}$ -6 or 1.3750-6	UNC	1A	0.00346	0.00600	1B	0.00447	0.00775
		2A	0.00231	0.00400	2B	0.00300	0.00520
		3A	0.00173	0.00300	3B	0.00225	0.00390
1 $\frac{3}{8}$ -8 or 1.3750-8	UN	2A	0.00208	0.00360	2B	0.00268	0.00465
		3A	0.00156	0.00270	3B	0.00202	0.00350
1 $\frac{3}{8}$ -12 or 1.3750-12	UNF	1A	0.00271	0.00470	1B	0.00355	0.00615
		2A	0.00182	0.00315	2B	0.00237	0.00410
		3A	0.00136	0.00235	3B	0.00176	0.00305
1 $\frac{3}{8}$ -16 or 1.3750-16	UN	2A	0.00147	0.00255	2B	0.00191	0.00330
		3A	0.00110	0.00190	3B	0.00144	0.00250
1 $\frac{3}{8}$ -18 or 1.3750-18	UNEF	2A	0.00141	0.00245	2B	0.00182	0.00315
		3A	0.00104	0.00180	3B	0.00136	0.00235
1 $\frac{3}{8}$ -20 or 1.3750-20	UN	2A	0.00136	0.00235	2B	0.00176	0.00305
		3A	0.00101	0.00175	3B	0.00130	0.00225
1 $\frac{3}{8}$ -28 or 1.3750-28	UN	2A	0.00118	0.00205	2B	0.00153	0.00265
		3A	0.00089	0.00155	3B	0.00115	0.00200
1 $\frac{7}{16}$ -6 or 1.4375-6	UN	2A	0.00231	0.00400	2B	0.00300	0.00520
		3A	0.00173	0.00300	3B	0.00225	0.00390

Table 3
Allowable Variations in Lead and Equivalent Change in Functional Diameter (Cont'd)

Nominal Size and Threads/in.	Series Designation	External			Internal		
		Class	Allowable Variation in Lead, in. ($\pm$)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}Td_2$ (+)	Class	Allowable Variation in Lead, in. ($\pm$)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}TD_2$ (-)
1	2	3	4	5	6	7	8
1 $\frac{7}{16}$ -8 or 1.4375-8	UN	2A	0.00208	0.00360	2B	0.00271	0.00470
		3A	0.00156	0.00270	3B	0.00205	0.00355
1 $\frac{7}{16}$ -12 or 1.4375-12	UN	2A	0.00170	0.00295	2B	0.00219	0.0038
		3A	0.00127	0.00220	3B	0.00165	0.00285
1 $\frac{7}{16}$ -16 or 1.4375-16	UN	2A	0.00150	0.00260	2B	0.00196	0.00340
		3A	0.00113	0.00195	3B	0.00147	0.00255
1 $\frac{7}{16}$ -18 or 1.4375-18	UNEF	2A	0.00144	0.00250	2B	0.00188	0.00325
		3A	0.00107	0.00185	3B	0.00139	0.00240
1 $\frac{7}{16}$ -20 or 1.4375-20	UN	2A	0.00139	0.00240	2B	0.00179	0.00310
		3A	0.00104	0.00180	3B	0.00133	0.00230
1 $\frac{7}{16}$ -28 or 1.4375-28	UN	2A	0.00121	0.00210	2B	0.00159	0.00275
		3A	0.00089	0.00155	3B	0.00118	0.00205
1 $\frac{1}{2}$ -6 or 1.5000-6	UNC	1A	0.00349	0.00605	1B	0.00456	0.00790
		2A	0.00234	0.00405	2B	0.00303	0.00525
		3A	0.00176	0.00305	3B	0.00228	0.00305
1 $\frac{1}{2}$ -8 or 1.5000-8	UN	2A	0.00211	0.00365	2B	0.00274	0.00475
		3A	0.00159	0.00275	3B	0.00205	0.00355
1 $\frac{1}{2}$ -12 or 1.5000-12	UNF	1A	0.00277	0.00480	1B	0.00361	0.00625
		2A	0.00185	0.00320	2B	0.00240	0.00415
		3A	0.00139	0.00240	3B	0.00182	0.00315
1 $\frac{1}{2}$ -16 or 1.5000-16	UN	2A	0.00150	0.00260	2B	0.00196	0.00340
		3A	0.00113	0.00195	3B	0.00147	0.00255
1 $\frac{1}{2}$ -18 or 1.5000-18	UNEF	2A	0.00144	0.00250	2B	0.00188	0.00325
		3A	0.00107	0.00185	3B	0.00139	0.00240
1 $\frac{1}{2}$ -20 or 1.5000-20	UN	2A	0.00139	0.00240	2B	0.00179	0.0031
		3A	0.00104	0.00180	3B	0.00133	0.00230
1 $\frac{1}{2}$ -28 or 1.5000-28	UN	2A	0.00121	0.00210	2B	0.00159	0.00275
		3A	0.00089	0.00155	3B	0.00118	0.00205
1 $\frac{9}{16}$ -6 or 1.5625-6	UN	2A	0.00237	0.00410	2B	0.00306	0.00530
		3A	0.00176	0.00305	3B	0.00231	0.00400
1 $\frac{9}{16}$ -8 or 1.5625-8	UN	2A	0.00214	0.00370	2B	0.00277	0.00480
		3A	0.00159	0.00275	3B	0.00208	0.00360
1 $\frac{9}{16}$ -12 or 1.5625-12	UN	2A	0.00170	0.00295	2B	0.00219	0.00380
		3A	0.00127	0.00220	3B	0.00165	0.00285
1 $\frac{9}{16}$ -16 or 1.5625-16	UN	2A	0.00150	0.00260	2B	0.00196	0.00340
		3A	0.00113	0.00195	3B	0.00147	0.00255

Table 3
Allowable Variations in Lead and Equivalent Change in Functional Diameter (Cont'd)

Nominal Size and Threads/in.	Series Designation	External			Internal		
		Class	Allowable Variation in Lead, in. ($\pm$)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}Td_2$ (+)	Class	Allowable Variation in Lead, in. ($\pm$)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}TD_2$ (-)
1	2	3	4	5	6	7	8
$1\frac{9}{16}$ -18 or 1.5625-18	UNEF	2A	0.00144	0.00250	2B	0.00188	0.00325
		3A	0.00107	0.00185	3B	0.00139	0.00240
$1\frac{9}{16}$ -20 or 1.5625-20	UN	2A	0.00139	0.00240	2B	0.00179	0.00310
		3A	0.00104	0.00180	3B	0.00133	0.00230
$1\frac{5}{8}$ -6 or 1.6250-6	UN	2A	0.00237	0.00410	2B	0.00309	0.00535
		3A	0.00179	0.00310	3B	0.00231	0.00400
$1\frac{5}{8}$ -8 or 1.6250-8	UN	2A	0.00214	0.00370	2B	0.00280	0.00485
		3A	0.00162	0.00280	3B	0.00208	0.00360
$1\frac{5}{8}$ -12 or 1.6250-12	UN	2A	0.00170	0.00295	2B	0.00219	0.0038
		3A	0.00127	0.00220	3B	0.00165	0.00285
$1\frac{5}{8}$ -16 or 1.6250-16	UN	2A	0.00150	0.00260	2B	0.00196	0.00340
		3A	0.00113	0.00195	3B	0.00147	0.00255
$1\frac{5}{8}$ -18 or 1.6250-18	UNEF	2A	0.00144	0.00250	2B	0.00188	0.00325
		3A	0.00107	0.00185	3B	0.00130	0.00240
$1\frac{5}{8}$ -20 or 1.6250-20	UN	2A	0.00139	0.00240	2B	0.00179	0.00310
		3A	0.00104	0.00180	3B	0.00133	0.00230
$1\frac{11}{16}$ -6 or 1.6875-6	UN	2A	0.00240	0.00415	2B	0.00312	0.00540
		3A	0.00179	0.00310	3B	0.00234	0.00405
$1\frac{11}{16}$ -8 or 1.6875-8	UN	2A	0.00217	0.00375	2B	0.00280	0.00485
		3A	0.00162	0.00280	3B	0.00211	0.00365
$1\frac{11}{16}$ -12 or 1.6875-12	UN	2A	0.00173	0.00300	2B	0.00225	0.00390
		3A	0.00130	0.00225	3B	0.00167	0.00290
$1\frac{11}{16}$ -16 or 1.6875-16	UN	2A	0.00153	0.00265	2B	0.00199	0.00345
		3A	0.00115	0.00200	3B	0.00150	0.00260
$1\frac{11}{16}$ -18 or 1.6875-18	UNEF	2A	0.00147	0.00255	2B	0.00191	0.00330
		3A	0.00110	0.00190	3B	0.00141	0.00245
$1\frac{11}{16}$ -20 or 1.6875-20	UN	2A	0.00139	0.00240	2B	0.00182	0.00315
		3A	0.00104	0.00180	3B	0.00136	0.00235
$1\frac{3}{4}$ -5 or 1.7500-5	UNC	1A	0.00387	0.00670	1B	0.00502	0.00870
		2A	0.00257	0.00445	2B	0.00335	0.00580
		3A	0.00193	0.00335	3B	0.00251	0.00435
$1\frac{3}{4}$ -6 or 1.7500-6	UN	2A	0.00240	0.00415	2B	0.00312	0.00540
		3A	0.00182	0.00315	3B	0.00234	0.00405
$1\frac{3}{4}$ -8 or 1.7500-8	UN	2A	0.00217	0.00375	2B	0.00283	0.00490
		3A	0.00165	0.00285	3B	0.00214	0.00370
$1\frac{3}{4}$ -12 or 1.7500-12	UN	2A	0.00173	0.00300	2B	0.00225	0.00390
		3A	0.00130	0.00225	3B	0.00167	0.00290

Table 3
Allowable Variations in Lead and Equivalent Change in Functional Diameter (Cont'd)

Nominal Size and Threads/in.	Series Designation	External			Internal		
		Class	Allowable Variation in Lead, in. ($\pm$)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}Td_2$ (+)	Class	Allowable Variation in Lead, in. ($\pm$)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}TD_2$ (-)
1	2	3	4	5	6	7	8
1 $\frac{3}{4}$ -16 or 1.7500-16	UN	2A	0.00153	0.00265	2B	0.00199	0.00345
		3A	0.00115	0.00200	3B	0.00150	0.00260
1 $\frac{3}{4}$ -20 or 1.7500-20	UN	2A	0.00139	0.00240	2B	0.00182	0.00315
		3A	0.00104	0.00180	3B	0.00136	0.00235
1 $\frac{13}{16}$ -6 or 1.8125-6	UN	2A	0.00242	0.00420	2B	0.00315	0.00545
		3A	0.00182	0.00315	3B	0.00237	0.00410
1 $\frac{13}{16}$ -8 or 1.8125-8	UN	2A	0.00219	0.00380	2B	0.00286	0.00495
		3A	0.00165	0.00285	3B	0.00214	0.00370
1 $\frac{13}{16}$ -12 or 1.8125-12	UN	2A	0.00173	0.00300	2B	0.00225	0.00390
		3A	0.00130	0.00225	3B	0.00167	0.00290
1 $\frac{13}{16}$ -16 or 1.8125-16	UN	2A	0.00153	0.00265	2B	0.00199	0.00345
		3A	0.00115	0.00200	3B	0.00150	0.00260
1 $\frac{13}{16}$ -20 or 1.8125-20	UN	2A	0.00139	0.00240	2B	0.00182	0.00315
		3A	0.00104	0.00180	3B	0.00136	0.00235
1 $\frac{7}{8}$ -6 or 1.8750-6	UN	2A	0.00242	0.00420	2B	0.00318	0.00550
		3A	0.00182	0.00315	3B	0.00237	0.00410
1 $\frac{7}{8}$ -8 or 1.8750-8	UN	2A	0.00222	0.00385	2B	0.00289	0.00500
		3A	0.00165	0.00285	3B	0.00217	0.00375
1 $\frac{7}{8}$ -12 or 1.8750-12	UN	2A	0.00173	0.00300	2B	0.00225	0.00390
		3A	0.00130	0.00225	3B	0.00167	0.00290
1 $\frac{7}{8}$ -16 or 1.8750-16	UN	2A	0.00153	0.00265	2B	0.00199	0.00345
		3A	0.00115	0.00200	3B	0.00150	0.00260
1 $\frac{7}{8}$ -20 or 1.8750-20	UN	2A	0.00139	0.00240	2B	0.00182	0.00315
		3A	0.00104	0.001800	3B	0.00136	0.00235
1 $\frac{15}{16}$ -6 or 1.9375-6	UN	2A	0.00245	0.00425	2B	0.00320	0.00555
		3A	0.00185	0.00320	3B	0.00240	0.00415
1 $\frac{15}{16}$ -8 or 1.9375-8	UN	2A	0.00222	0.00385	2B	0.00289	0.00500
		3A	0.00167	0.00290	3B	0.00217	0.00375
1 $\frac{15}{16}$ -12 or 1.9375-12	UN	2A	0.00176	0.00305	2B	0.00228	0.00395
		3A	0.0013	0.00225	3B	0.00170	0.00295
1 $\frac{15}{16}$ -16 or 1.9375-16	UN	2A	0.00156	0.00270	2B	0.00202	0.00350
		3A	0.00115	0.00200	3B	0.00150	0.00260
1 $\frac{15}{16}$ -20 or 1.9375-20	UN	2A	0.00141	0.00245	2B	0.00185	0.00320
		3A	0.00107	0.00185	3B	0.00139	0.00240
2-4 $\frac{1}{2}$ or 2.0000-4.5	UNC	1A	0.00413	0.00715	1B	0.00537	0.00930
		2A	0.00274	0.00475	2B	0.00358	0.00620
		3A	0.00205	0.00355	3B	0.00268	0.00465

Table 3
Allowable Variations in Lead and Equivalent Change in Functional Diameter (Cont'd)

Nominal Size and Threads/in.	Series Designation	External			Internal		
		Class	Allowable Variation in Lead, in. (±)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}Td_2$ (+)	Class	Allowable Variation in Lead, in. (±)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}TD_2$ (-)
1	2	3	4	5	6	7	8
2-6 or 2.0000-6	UN	2A	0.00248	0.00430	2B	0.00320	0.00555
		3A	0.00185	0.00320	3B	0.00240	0.00415
2-8 or 2.0000-8	UN	2A	0.00225	0.00390	2B	0.00292	0.00505
		3A	0.00167	0.00290	3B	0.00219	0.00380
2-12 or 2.0000-12	UN	2A	0.00176	0.00305	2B	0.00223	0.00395
		3A	0.00130	0.00225	3B	0.0017	0.00295
2-16 or 2.0000-16	UN	2A	0.00156	0.00270	2B	0.00202	0.00350
		3A	0.00115	0.00200	3B	0.00150	0.00260
2-20 or 2.0000-20	UN	2A	0.00141	0.00245	2B	0.00185	0.00320
		3A	0.00107	0.00185	3B	0.00139	0.00240
2 $\frac{1}{8}$ -6 or 2.1250-6	UN	2A	0.00251	0.00435	2B	0.00326	0.00565
		3A	0.00188	0.00325	3B	0.00242	0.00420
2 $\frac{1}{8}$ -8 or 2.1250-8	UN	2A	0.00228	0.00395	2B	0.00294	0.00510
		3A	0.00170	0.00295	3B	0.00212	0.00385
2 $\frac{1}{8}$ -12 or 2.1250-12	UN	2A	0.00176	0.00305	2B	0.00228	0.00395
		3A	0.00130	0.00225	3B	0.00170	0.00295
2 $\frac{1}{8}$ -16 or 2.1250-16	UN	2A	0.00156	0.00270	2B	0.00202	0.00350
		3A	0.00115	0.00200	3B	0.00150	0.00260
2 $\frac{1}{8}$ -20 or 2.1250-20	UN	2A	0.00141	0.00245	2B	0.00185	0.00320
		3A	0.00107	0.00185	3B	0.00139	0.00240
2 $\frac{1}{4}$ -4 $\frac{1}{2}$ or 2.2500-4.5	UNC	1A	0.00421	0.00730	1B	0.00548	0.00950
		2A	0.00280	0.00485	2B	0.00364	0.00630
		3A	0.00211	0.00365	3B	0.00274	0.00475
2 $\frac{1}{4}$ -6 or 2.2500-6	UN	2A	0.00254	0.00440	2B	0.00329	0.00570
		3A	0.00191	0.00330	3B	0.00214	0.00425
2 $\frac{1}{4}$ -8 or 2.2500-8	UN	2A	0.00231	0.00400	2B	0.00300	0.00520
		3A	0.00173	0.00300	3B	0.00225	0.00390
2 $\frac{1}{4}$ -12 or 2.2500-12	UN	2A	0.00176	0.00305	2B	0.00228	0.00395
		3A	0.00130	0.00225	3B	0.00170	0.00295
2 $\frac{1}{4}$ -16 or 2.2500-16	UN	2A	0.00156	0.00270	2B	0.00202	0.00350
		3A	0.00115	0.00200	3B	0.00150	0.00260
2 $\frac{1}{4}$ -20 or 2.2500-20	UN	2A	0.00141	0.00245	2B	0.00185	0.00320
		3A	0.00107	0.00185	3B	0.00139	0.00240
2 $\frac{3}{8}$ -6 or 2.3750-6	UN	2A	0.00257	0.00445	2B	0.00332	0.00575
		3A	0.00191	0.00330	3B	0.00248	0.00430
2 $\frac{3}{8}$ -8 or 2.3750-8	UN	2A	0.00234	0.00405	2B	0.00303	0.00525
		3A	0.00173	0.00300	3B	0.00228	0.00395

Table 3
Allowable Variations in Lead and Equivalent Change in Functional Diameter (Cont'd)

Nominal Size and Threads/in.	Series Designation	External			Internal		
		Class	Allowable Variation in Lead, in. ($\pm$)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}Td_2$ (+)	Class	Allowable Variation in Lead, in. ($\pm$)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}TD_2$ (-)
1	2	3	4	5	6	7	8
$2\frac{3}{8}$ -12 or 2.3750-12	UN	2A	0.00179	0.00310	2B	0.00234	0.00405
		3A	0.00133	0.00230	3B	0.00173	0.00300
$2\frac{3}{8}$ -16 or 2.3750-16	UN	2A	0.00159	0.00275	2B	0.00208	0.00360
		3A	0.00118	0.00205	3B	0.00155	0.00270
$2\frac{3}{8}$ -20 or 2.3750-20	UN	2A	0.00147	0.00255	2B	0.00191	0.00330
		3A	0.00110	0.00190	3B	0.00144	0.00250
$2\frac{1}{2}$ -4 or 2.5000-4	UNC	1A	0.00447	0.00775	1B	0.00583	0.0101
		2A	0.00300	0.00520	2B	0.0039	0.00675
		3A	0.00225	0.00390	3B	0.00292	0.00505
$2\frac{1}{2}$ -6 or 2.5000-6	UN	2A	0.00260	0.00450	2B	0.00335	0.00580
		3A	0.00193	0.00335	3B	0.00251	0.00435
$2\frac{1}{2}$ -8 or 2.5000-8	UN	2A	0.00237	0.00410	2B	0.00306	0.00530
		3A	0.00176	0.00305	3B	0.00231	0.00400
$2\frac{1}{2}$ -12 or 2.5000-12	UN	2A	0.00179	0.00310	2B	0.00234	0.00405
		3A	0.00133	0.00230	3B	0.00173	0.00300
$2\frac{1}{2}$ -16 or 2.5000-16	UN	2A	0.00159	0.00275	2B	0.00208	0.00360
		3A	0.00118	0.00205	3B	0.00156	0.00270
$2\frac{1}{2}$ -20 or 2.5000-20	UN	2A	0.00147	0.00255	2B	0.00191	0.00330
		3A	0.0011	0.00190	3B	0.00144	0.00250
$2\frac{5}{8}$ -6 or 2.6250-6	UN	2A	0.00260	0.00450	2B	0.00341	0.00590
		3A	0.00196	0.00340	3B	0.00254	0.00440
$2\frac{5}{8}$ -8 or 2.6250-8	UN	2A	0.00237	0.00410	2B	0.00309	0.00535
		3A	0.00179	0.00310	3B	0.00231	0.00400
$2\frac{5}{8}$ -12 or 2.6250-12	UN	2A	0.00179	0.00310	2B	0.00234	0.00405
		3A	0.00133	0.00230	3B	0.00173	0.00300
$2\frac{5}{8}$ -16 or 2.6250-16	UN	2A	0.00159	0.00275	2B	0.00208	0.00360
		3A	0.00118	0.00205	3B	0.00156	0.00270
$2\frac{5}{8}$ -20 or 2.6250-20	UN	2A	0.00147	0.00255	2B	0.00191	0.00330
		3A	0.00110	0.00190	3B	0.00144	0.00250
$2\frac{3}{4}$ -4 or 2.7500-4	UNC	1A	0.00456	0.00790	1B	0.00595	0.01030
		2A	0.00303	0.00525	2B	0.00395	0.00685
		3A	0.00228	0.00395	3B	0.00297	0.00515
$2\frac{3}{4}$ -6 or 2.7500-6	UN	2A	0.00263	0.00455	2B	0.00344	0.00595
		3A	0.00196	0.00340	3B	0.00257	0.00445
$2\frac{3}{4}$ -8 or 2.7500-8	UN	2A	0.00240	0.00415	2B	0.00312	0.00540
		3A	0.00182	0.00315	3B	0.00234	0.00405

Table 3
Allowable Variations in Lead and Equivalent Change in Functional Diameter (Cont'd)

Nominal Size and Threads/in.	Series Designation	External			Internal		
		Class	Allowable Variation in Lead, in. ($\pm$)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}Td_2$ (+)	Class	Allowable Variation in Lead, in. ($\pm$)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}TD_2$ (-)
1	2	3	4	5	6	7	8
2 $\frac{3}{4}$ -12 or 2.7500-12	UN	2A	0.00179	0.00310	2B	0.00234	0.00405
		3A	0.00133	0.00230	3B	0.00173	0.00300
2 $\frac{3}{4}$ -16 or 2.7500-16	UN	2A	0.00159	0.00275	2B	0.00208	0.00360
		3A	0.00118	0.00205	3B	0.00156	0.00270
2 $\frac{3}{4}$ -20 or 2.7500-20	UN	2A	0.00147	0.00255	2B	0.00191	0.00330
		3A	0.00110	0.00190	3B	0.00144	0.00250
2 $\frac{7}{8}$ -6 or 2.8750-6	UN	2A	0.00266	0.00460	2B	0.00346	0.00600
		3A	0.00199	0.00345	3B	0.00280	0.00450
2 $\frac{7}{8}$ -8 or 2.8750-8	UN	2A	0.00242	0.00420	2B	0.00318	0.00550
		3A	0.00182	0.00315	3B	0.00237	0.00410
2 $\frac{7}{8}$ -12 or 2.8750-12	UN	2A	0.00182	0.00315	2B	0.00237	0.00410
		3A	0.00136	0.00235	3B	0.00179	0.00310
2 $\frac{7}{8}$ -16 or 2.8750-16	UN	2A	0.00162	0.00280	2B	0.00211	0.00365
		3A	0.00121	0.00210	3B	0.00159	0.00275
2 $\frac{7}{8}$ -20 or 2.8750-20	UN	2A	0.00150	0.00260	2B	0.00196	0.00340
		3A	0.00113	0.00195	3B	0.00147	0.00255
3-4 or 3.0000-4	UNC	1A	0.00465	0.00805	1B	0.00603	0.01045
		2A	0.00309	0.00535	2B	0.00401	0.00695
		3A	0.00231	0.00400	3B	0.00300	0.00520
3-6 or 3.0000-6	UN	2A	0.00268	0.00465	2B	0.00349	0.00605
		3A	0.00202	0.00350	3B	0.00263	0.00455
3-8 or 3.0000-8	UN	2A	0.00245	0.00425	2B	0.00320	0.00555
		3A	0.00185	0.00320	3B	0.00240	0.00415
3-12 or 3.0000-12	UN	2A	0.00182	0.00315	2B	0.00237	0.00410
		3A	0.00136	0.00235	3B	0.00179	0.00310
3-16 or 3.0000-16	UN	2A	0.00162	0.00280	2B	0.00211	0.00365
		3A	0.00121	0.00210	3B	0.00159	0.00275
3-20 or 3.0000-20	UN	2A	0.00150	0.00260	2B	0.00196	0.00340
		3A	0.00113	0.00195	3B	0.00147	0.00255
3 $\frac{1}{8}$ -6 or 3.1250-6	UN	2A	0.00271	0.00470	2B	0.00352	0.00610
		3A	0.00202	0.00350	3B	0.00266	0.00460
3 $\frac{1}{8}$ -8 or 3.1250-8	UN	2A	0.00248	0.00430	2B	0.00323	0.00560
		3A	0.00185	0.00320	3B	0.00242	0.00420
3 $\frac{1}{8}$ -12 or 3.1250-12	UN	2A	0.00182	0.00315	2B	0.00237	0.00410
		3A	0.00136	0.00235	3B	0.00179	0.00310
3 $\frac{1}{8}$ -16 or 3.1250-16	UN	2A	0.00162	0.00280	2B	0.00211	0.00365
		3A	0.00121	0.00210	3B	0.00159	0.00275

Table 3
Allowable Variations in Lead and Equivalent Change in Functional Diameter (Cont'd)

Nominal Size and Threads/in.	Series Designation	External			Internal		
		Class	Allowable Variation in Lead, in. ($\pm$)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}Td_2$ (+)	Class	Allowable Variation in Lead, in. ($\pm$)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}TD_2$ (-)
1	2	3	4	5	6	7	8
3 $\frac{1}{4}$ -4 or 3.2500-4	UNC	1A	0.00471	0.00815	1B	0.00612	0.01060
		2A	0.00315	0.00545	2B	0.00407	0.00705
		3A	0.00237	0.00410	3B	0.00306	0.00530
3 $\frac{1}{4}$ -6 or 3.2500-6	UN	2A	0.00274	0.00475	2B	0.00355	0.00615
		3A	0.00205	0.00355	3B	0.00266	0.00460
3 $\frac{1}{4}$ -8 or 3.2500-8	UN	2A	0.00251	0.00435	2B	0.00326	0.00565
		3A	0.00188	0.00325	3B	0.00245	0.00425
3 $\frac{1}{4}$ -12 or 3.2500-12	UN	2A	0.00182	0.00315	2B	0.00237	0.00410
		3A	0.00136	0.00235	3B	0.00179	0.00310
3 $\frac{1}{4}$ -16 or 3.2500-16	UN	2A	0.00162	0.00280	2B	0.00211	0.00365
		3A	0.00121	0.00210	3B	0.00159	0.00275
3 $\frac{3}{8}$ -6 or 3.3750-6	UN	2A	0.00274	0.00475	2B	0.00358	0.00620
		3A	0.00208	0.00360	3B	0.00258	0.00465
3 $\frac{3}{8}$ -8 or 3.3750-8	UN	2A	0.00254	0.00440	2B	0.00329	0.00570
		3A	0.00191	0.00330	3B	0.00245	0.00425
3 $\frac{3}{8}$ -12 or 3.3750-12	UN	2A	0.00185	0.00320	2B	0.00242	0.00420
		3A	0.00139	0.00242	3B	0.00182	0.00315
3 $\frac{3}{8}$ -16 or 3.3750-16	UN	2A	0.00167	0.00290	2B	0.00217	0.00375
		3A	0.00124	0.00215	3B	0.00162	0.00280
3 $\frac{1}{2}$ -4 or 3.5000-4	UNC	1A	0.00479	0.00830	1B	0.00621	0.01075
		2A	0.00318	0.00550	2B	0.00413	0.00715
		3A	0.00240	0.00415	3B	0.00312	0.00540
3 $\frac{1}{2}$ -6 or 3.5000-6	UN	2A	0.00277	0.00480	2B	0.00361	0.00625
		3A	0.00208	0.00360	3B	0.00271	0.00470
3 $\frac{1}{2}$ -8 or 3.5000-8	UN	2A	0.00254	0.00440	2B	0.00332	0.00575
		3A	0.00191	0.00330	3B	0.00248	0.00430
3 $\frac{1}{2}$ -12 or 3.5000-12	UN	2A	0.00185	0.00320	2B	0.00242	0.00420
		3A	0.00139	0.00240	3B	0.00182	0.00315
3 $\frac{1}{2}$ -16 or 3.5000-16	UN	2A	0.00167	0.00290	2B	0.00217	0.00375
		3A	0.00124	0.00215	3B	0.00162	0.00280
3 $\frac{5}{8}$ -6 or 3.6250-6	UN	2A	0.00280	0.00485	2B	0.00364	0.00630
		3A	0.00211	0.00365	3B	0.00274	0.00475
3 $\frac{5}{8}$ -8 or 3.6250-8	UN	2A	0.00257	0.00445	2B	0.00335	0.00580
		3A	0.00193	0.00335	3B	0.00251	0.00435
3 $\frac{5}{8}$ -12 or 3.6250-12	UN	2A	0.00185	0.00320	2B	0.00242	0.00420
		3A	0.00139	0.00240	3B	0.00182	0.00315

Table 3
Allowable Variations in Lead and Equivalent Change in Functional Diameter (Cont'd)

Nominal Size and Threads/in.	Series Designation	External			Internal		
		Class	Allowable Variation in Lead, in. (±)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}Td_2$ (+)	Class	Allowable Variation in Lead, in. (±)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}TD_2$ (-)
1	2	3	4	5	6	7	8
3 $\frac{5}{8}$ -16 or 3.6250-16	UN	2A	0.00167	0.00290	2B	0.00217	0.00375
		3A	0.00214	0.00215	3B	0.00162	0.00280
3 $\frac{3}{4}$ -4 or 3.7500-4	UNC	1A	0.00485	0.00840	1B	0.00629	0.01090
		2A	0.00323	0.00560	2B	0.00419	0.00725
		3A	0.00242	0.00420	3B	0.00315	0.00545
3 $\frac{3}{4}$ -6 or 3.7500-6	UN	2A	0.00283	0.00490	2B	0.00367	0.00635
		3A	0.00211	0.00365	3B	0.00274	0.00475
3 $\frac{3}{4}$ -8 or 3.7500-8	UN	2A	0.00260	0.00450	2B	0.00338	0.00585
		3A	0.00193	0.00335	3B	0.00254	0.00440
3 $\frac{3}{4}$ -12 or 3.7500-12	UN	2A	0.00185	0.00320	2B	0.00242	0.00420
		3A	0.00139	0.00240	3B	0.00182	0.00315
3 $\frac{3}{4}$ -16 or 3.7500-16	UN	2A	0.00167	0.00290	2B	0.00217	0.00375
		3A	0.00124	0.00215	3B	0.00162	0.00280
3 $\frac{7}{8}$ -6 or 3.8750-6	UN	2A	0.00286	0.00495	2B	0.00369	0.00640
		3A	0.00214	0.00370	3B	0.00277	0.00480
3 $\frac{7}{8}$ -8 or 3.8750-8	UN	2A	0.00263	0.00455	2B	0.00341	0.00590
		3A	0.00196	0.00340	3B	0.00254	0.00440
3 $\frac{7}{8}$ -12 or 3.8750-12	UN	2A	0.00188	0.00325	2B	0.00245	0.00425
		3A	0.00141	0.00245	3B	0.00185	0.00320
3 $\frac{7}{8}$ -16 or 3.8750-16	UN	2A	0.00170	0.00295	2B	0.00219	0.00380
		3A	0.00127	0.00220	3B	0.00165	0.00285
4-4 or 4.0000-4	UNC	1A	0.00491	0.00850	1B	0.00638	0.01105
		2A	0.00326	0.00565	2B	0.00424	0.00735
		3A	0.00245	0.00425	3B	0.00320	0.00555
4-6 or 4.0000-6	UN	2A	0.00286	0.00495	2B	0.00372	0.00645
		3A	0.00214	0.00370	3B	0.00280	0.00485
4-8 or 4.0000-8	UN	2A	0.00263	0.00455	2B	0.00344	0.00595
		3A	0.00196	0.00340	3B	0.00257	0.00445
4-12 or 4.0000-12	UN	2A	0.00188	0.00325	2B	0.00245	0.00425
		3A	0.00141	0.00245	3B	0.00185	0.00320
4-16 or 4.0000-16	UN	2A	0.00170	0.00295	2B	0.00219	0.00380
		3A	0.00127	0.00220	3B	0.00165	0.00285
4 $\frac{1}{8}$ -6 or 4.1250-6	UN	2A	0.00289	0.00500	2B	0.00375	0.00650
		3A	0.00217	0.00375	3B	0.00280	0.00485
4 $\frac{1}{8}$ -8 or 4.1250-8	UN	2A	0.00266	0.00460	2B	0.00346	0.00600
		3A	0.00199	0.00345	3B	0.00260	0.00450

Table 3
Allowable Variations in Lead and Equivalent Change in Functional Diameter (Cont'd)

Nominal Size and Threads/in.	Series Designation	External			Internal		
		Class	Allowable Variation in Lead, in. ($\pm$)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}Td_2$ (+)	Class	Allowable Variation in Lead, in. ($\pm$)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}TD_2$ (-)
1	2	3	4	5	6	7	8
4 $\frac{1}{8}$ -12 or 4.1250-12	UN	2A	0.00188	0.00325	2B	0.00245	0.00425
		3A	0.00141	0.00245	3B	0.00185	0.00320
4 $\frac{1}{8}$ -16 or 4.1250-16	UN	2A	0.00170	0.00295	2B	0.00219	0.00380
		3A	0.00127	0.00220	3B	0.00165	0.00285
4 $\frac{1}{4}$ -4 or 4.2500-4	UN	2A	0.00332	0.00575	2B	0.00430	0.00745
		3A	0.00248	0.00430	3B	0.00323	0.00560
4 $\frac{1}{4}$ -6 or 4.2500-6	UN	2A	0.00292	0.00505	2B	0.00378	0.00655
		3A	0.00217	0.00375	3B	0.00283	0.00490
4 $\frac{1}{4}$ -8 or 4.2500-8	UN	2A	0.00268	0.00465	2B	0.00346	0.00600
		3A	0.00202	0.00350	3B	0.00263	0.00455
4 $\frac{1}{4}$ -12 or 4.2500-12	UN	2A	0.00188	0.00325	2B	0.00245	0.00425
		3A	0.00141	0.00245	3B	0.00185	0.00320
4 $\frac{1}{4}$ -16 or 4.2500-16	UN	2A	0.00170	0.00295	2B	0.00219	0.00380
		3A	0.00127	0.00220	3B	0.00165	0.00285
4 $\frac{3}{8}$ -6 or 4.3750-6	UN	2A	0.00292	0.00505	2B	0.00381	0.00660
		3A	0.00219	0.00380	3B	0.00286	0.00495
4 $\frac{3}{8}$ -8 or 4.3750-8	UN	2A	0.00268	0.00465	2B	0.00346	0.00600
		3A	0.00202	0.00350	3B	0.00263	0.00455
4 $\frac{3}{8}$ -12 or 4.3750-12	UN	2A	0.00188	0.00325	2B	0.00245	0.00425
		3A	0.00141	0.00245	3B	0.00185	0.00320
4 $\frac{3}{8}$ -16 or 4.3750-16	UN	2A	0.00170	0.00295	2B	0.00219	0.00380
		3A	0.00127	0.00220	3B	0.00165	0.00285
4 $\frac{1}{2}$ -4 or 4.5000-4	UN	2A	0.00335	0.00580	2B	0.00436	0.00755
		3A	0.00251	0.00435	3B	0.00326	0.00565
4 $\frac{1}{2}$ -6 or 4.5000-6	UN	2A	0.00294	0.00510	2B	0.00384	0.00665
		3A	0.00222	0.00385	3B	0.00286	0.00495
4 $\frac{1}{2}$ -8 or 4.5000-8	UN	2A	0.00271	0.00470	2B	0.00352	0.00610
		3A	0.00205	0.00355	3B	0.00266	0.00460
4 $\frac{1}{2}$ -12 or 4.5000-12	UN	2A	0.00188	0.00325	2B	0.00245	0.00425
		3A	0.00141	0.00245	3B	0.00185	0.00320
4 $\frac{1}{2}$ -16 or 4.5000-16	UN	2A	0.00170	0.00295	2B	0.00219	0.00380
		3A	0.00127	0.00220	3B	0.00165	0.00285
4 $\frac{5}{8}$ -6 or 4.6250-6	UN	2A	0.00297	0.00515	2B	0.00384	0.00665
		3A	0.00222	0.00385	3B	0.00289	0.00500
4 $\frac{5}{8}$ -8 or 4.6250-8	UN	2A	0.00274	0.00475	2B	0.00358	0.00620
		3A	0.00205	0.00355	3B	0.00268	0.00465

Table 3
Allowable Variations in Lead and Equivalent Change in Functional Diameter (Cont'd)

Nominal Size and Threads/in.	Series Designation	External			Internal		
		Class	Allowable Variation in Lead, in. ($\pm$)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}Td_2$ (+)	Class	Allowable Variation in Lead, in. ($\pm$)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}TD_2$ (-)
1	2	3	4	5	6	7	8
4 $\frac{5}{8}$ -12 or 4.6250-12	UN	2A	0.00193	0.00335	2B	0.00251	0.00435
		3A	0.00144	0.00250	3B	0.00191	0.00330
4 $\frac{5}{8}$ -16 or 4.6250-16	UN	2A	0.00176	0.00305	2B	0.00228	0.00395
		3A	0.00130	0.00225	3B	0.00170	0.00295
4 $\frac{3}{4}$ -4 or 4.7500-4	UN	2A	0.00338	0.00585	2B	0.00442	0.00765
		3A	0.00254	0.00440	3B	0.00329	0.00570
4 $\frac{3}{4}$ -6 or 4.7500-6	UN	2A	0.00297	0.00515	2B	0.00387	0.00670
		3A	0.00222	0.00385	3B	0.00292	0.00505
4 $\frac{3}{4}$ -8 or 4.7500-8	UN	2A	0.00274	0.00475	2B	0.00358	0.00620
		3A	0.00205	0.00355	3B	0.00268	0.00465
4 $\frac{3}{4}$ -12 or 4.7500-12	UN	2A	0.00193	0.00335	2B	0.00251	0.00435
		3A	0.00144	0.00250	3B	0.00191	0.00330
4 $\frac{3}{4}$ -16 or 4.7500-16	UN	2A	0.00176	0.00305	2B	0.00228	0.00395
		3A	0.00130	0.00225	3B	0.00170	0.00295
4 $\frac{7}{8}$ -6 or 4.8750-6	UN	2A	0.00300	0.00520	2B	0.00390	0.00675
		3A	0.00225	0.00390	3B	0.00292	0.00505
4 $\frac{7}{8}$ -8 or 4.8750-8	UN	2A	0.00277	0.00480	2B	0.00361	0.00625
		3A	0.00208	0.00360	3B	0.00271	0.00470
4 $\frac{7}{8}$ -12 or 4.8750-12	UN	2A	0.00193	0.00335	2B	0.00251	0.00435
		3A	0.00144	0.00250	3B	0.00101	0.00330
4 $\frac{7}{8}$ -16 or 4.8750-16	UN	2A	0.00176	0.00305	2B	0.00228	0.00395
		3A	0.00130	0.00225	3B	0.00170	0.00295
5-4 or 5.0000-4	UN	2A	0.00344	0.00595	2B	0.00445	0.00770
		3A	0.00257	0.00445	3B	0.00335	0.00580
5-6 or 5.0000-6	UN	2A	0.00303	0.00525	2B	0.00393	0.00680
		3A	0.00225	0.00390	3B	0.00294	0.00510
5-8 or 5.0000-8	UN	2A	0.00280	0.00485	2B	0.00364	0.00630
		3A	0.00211	0.00365	3B	0.00274	0.00475
5-12 or 5.0000-12	UN	2A	0.00193	0.00335	2B	0.00251	0.00435
		3A	0.00144	0.00250	3B	0.00191	0.00330
5-16 or 5.0000-16	UN	2A	0.00176	0.00305	2B	0.00228	0.00305
		3A	0.00130	0.00225	3B	0.00170	0.00295
5 $\frac{1}{8}$ -8 or 5.1250-8	UN	2A	0.00280	0.00485	2B	0.00364	0.00630
		3A	0.00211	0.00365	3B	0.00274	0.00475
5 $\frac{1}{8}$ -12 or 5.1250-12	UN	2A	0.00193	0.00335	2B	0.00251	0.00435
		3A	0.00144	0.00250	3B	0.00191	0.00330

Table 3
Allowable Variations in Lead and Equivalent Change in Functional Diameter (Cont'd)

Nominal Size and Threads/in.	Series Designation	External			Internal		
		Class	Allowable Variation in Lead, in. ($\pm$)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}Td_2$ (+)	Class	Allowable Variation in Lead, in. ($\pm$)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}TD_2$ (-)
1	2	3	4	5	6	7	8
5 $\frac{1}{8}$ -16 or 5.1250-16	UN	2A	0.00176	0.00305	2B	0.00228	0.00395
		3A	0.00130	0.00225	3B	0.00170	0.00295
5 $\frac{1}{4}$ -4 or 5.2500-4	UN	2A	0.00346	0.00600	2B	0.00450	0.00780
		3A	0.00260	0.00450	3B	0.00385	0.00585
5 $\frac{1}{4}$ -8 or 5.2500-8	UN	2A	0.00283	0.00490	2B	0.00367	0.00635
		3A	0.00214	0.00370	3B	0.00277	0.00480
5 $\frac{1}{4}$ -12 or 5.2500-12	UN	2A	0.00193	0.00335	2B	0.00251	0.00435
		3A	0.00144	0.00250	3B	0.00191	0.00330
5 $\frac{1}{4}$ -16 or 5.2500-16	UN	2A	0.00176	0.00305	2B	0.00228	0.00395
		3A	0.00130	0.00225	3B	0.00170	0.00295
5 $\frac{3}{8}$ -8 or 5.3750-8	UN	2A	0.00286	0.00495	2B	0.00372	0.00645
		3A	0.00214	0.00370	3B	0.00280	0.00485
5 $\frac{3}{8}$ -12 or 5.3750-12	UN	2A	0.00193	0.00335	2B	0.00251	0.00435
		3A	0.00144	0.00250	3B	0.00191	0.00330
5 $\frac{3}{8}$ -16 or 5.3750-16	UN	2A	0.00176	0.00305	2B	0.00231	0.00395
		3A	0.00130	0.00225	3B	0.00170	0.00295
5 $\frac{1}{2}$ -4 or 5.5000-4	UN	2A	0.00349	0.00605	2B	0.00456	0.00790
		3A	0.00263	0.00455	3B	0.00341	0.00500
5 $\frac{1}{2}$ -8 or 5.5000-8	UN	2A	0.00286	0.00495	2B	0.00372	0.00645
		3A	0.00214	0.00370	3B	0.00280	0.00485
5 $\frac{1}{2}$ -12 or 5.5000-12	UN	2A	0.00193	0.00335	2B	0.00251	0.00435
		3A	0.00144	0.00250	3B	0.00191	0.00330
5 $\frac{1}{2}$ -16 or 5.5000-16	UN	2A	0.00176	0.00305	2B	0.00228	0.00395
		3A	0.00130	0.00225	3B	0.00170	0.00295
5 $\frac{5}{8}$ -8 or 5.6250-8	UN	2A	0.00289	0.00500	2B	0.00375	0.00650
		3A	0.00217	0.00375	3B	0.00283	0.00490
5 $\frac{5}{8}$ -12 or 5.6250-12	UN	2A	0.00199	0.00345	2B	0.00260	0.00450
		3A	0.00150	0.00260	3B	0.00193	0.00335
5 $\frac{5}{8}$ -16 or 5.6250-16	UN	2A	0.00179	0.00310	2B	0.00234	0.00405
		3A	0.00136	0.00235	3B	0.00176	0.00305
5 $\frac{3}{4}$ -4 or 5.7500-4	UN	2A	0.00352	0.00610	2B	0.00459	0.00795
		3A	0.00266	0.00460	3B	0.00344	0.00595
5 $\frac{3}{4}$ -8 or 5.7500-8	UN	2A	0.00289	0.00500	2B	0.00375	0.00650
		3A	0.00217	0.00375	3B	0.00283	0.00490
5 $\frac{3}{4}$ -12 or 5.7500-12	UN	2A	0.00199	0.00345	2B	0.00260	0.00450
		3A	0.00150	0.00260	3B	0.00193	0.00335

Table 3
Allowable Variations in Lead and Equivalent Change in Functional Diameter (Cont'd)

Nominal Size and Threads/in.	Series Designation	External			Internal		
		Class	Allowable Variation in Lead, in. ($\pm$)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}Td_2$ (+)	Class	Allowable Variation in Lead, in. ($\pm$)	Equivalent Change in Functional Diameter, in., $\frac{1}{2}TD_2$ (-)
1	2	3	4	5	6	7	8
5 $\frac{3}{4}$ -16 or 5.7500-16	UN	2A	0.00179	0.00310	2B	0.00234	0.00405
		3A	0.00136	0.00235	3B	0.00176	0.00305
5 $\frac{7}{8}$ -8 or 5.8750-8	UN	2A	0.00292	0.00505	2B	0.00378	0.00655
		3A	0.00219	0.00380	3B	0.00283	0.00490
5 $\frac{7}{8}$ -12 or 5.8750-12	UN	2A	0.00199	0.00345	2B	0.00260	0.00450
		3A	0.00150	0.00260	3B	0.00193	0.00335
5 $\frac{7}{8}$ -16 or 5.8750-16	UN	2A	0.00179	0.00310	2B	0.00234	0.00405
		3A	0.00136	0.00235	3B	0.00176	0.00305
6-4 or 6.0000-4	UN	2A	0.00358	0.00620	2B	0.00455	0.00805
		3A	0.00268	0.00465	3B	0.00346	0.00600
6-8 or 6.0000-8	UN	2A	0.00294	0.00510	2B	0.00384	0.00665
		3A	0.00222	0.00385	3B	0.00286	0.00495
6-12 or 6.0000-12	UN	2A	0.00199	0.00315	2B	0.00260	0.00450
		3A	0.00150	0.00260	3B	0.00193	0.00335
6-16 or 6.0000-16	UN	2A	0.00179	0.00310	2B	0.00234	0.00405
		3A	0.00136	0.00235	3B	0.00176	0.00305

GENERAL NOTE: See [paras. 9.2.2](#) through [9.2.5](#) for applicability.

5.6.1 The principal practical factors that govern minor diameter tolerance are ease of tapping, standard drill sizes, and height of engagement.

NOTE: Height of engagement is measured in a radial direction, while length of engagement is measured in an axial direction.

Height of engagement correlates with the stripping strength of the thread assembly and, therefore, with the length of engagement. It also correlates with the tendency toward disengagement of the threads on one side when assembly is eccentric. The amount of possible eccentricity is one-half of the sum of the allowance and pitch diameter tolerances on both mating threads. For a given pitch, or height of thread, this sum increases with the diameter and, accordingly, this factor would require a decrease in minor diameter tolerance with an increase in thread diameter. However, such a decrease in tolerance often is not feasible without requiring special drill sizes; in order to better accommodate available standard drill sizes listed in ASME B94.11M, the minor diameter tolerance for Classes 1B and 2B of a given pitch for $\frac{1}{4}$ -in. diameter and larger is constant.

There may be applications where the lengths of engagement of the mating threads or the combination of materials used for mating threads are such that the maximum tolerance may not provide the desired strength of the fastening. Experience has shown that for lengths of engagement less than $0.67D$ (the minimum thickness of standard nuts), the minor diameter tolerance may be reduced without causing tapping difficulties.

In other applications, the length of engagement of mating threads may be long because of design considerations or the combination of materials used for mating threads. As the threads engaged increase in number, their height of engagement may be shallower and still develop stripping strength greater than the external thread breaking strength. In these cases, the maximum limit should be increased to reduce the possibility of tapping difficulties.

It is particularly important to reduce the number of minor diameter tolerances to a practical minimum. This reduction is usually obvious to the producer of longer internally threaded components, but sometimes is not understood by the user.

The tolerances for lengths of engagement less than $0.33D$ are 0.50 times the formula values in [para. 5.8.2\(c\)](#). For lengths of engagement from $0.33D$ to $0.67D$, the tolerances are 0.75 times the formula values; for lengths of engagement from $0.67D$ to $1.5D$, the tolerances are equal to the formula values; and for lengths of engagement over $1.5D$, the tolerances are 1.25 times the formula values. Where the tolerance value so computed is more than $0.39400P$, the value is adjusted to equal $0.39400P$.

5.7 Disposition of Allowance and Tolerance

The disposition of allowance, tolerance, and crest clearances for the various thread classes is shown in [Figures 5](#) through [8](#), [10](#), and [11](#).

5.8 Formulas for Allowance and Tolerance

The following formulas for allowance, es , and tolerance are used for unified formulation and apply to standard and special series screw threads.

Calculations shall use Class 2A pitch diameter tolerance, Td_2 , with six decimal places. Final values shall be rounded to four decimal places.

The following nomenclature is used in the equations:

- D = diameter
- es = allowance, external threads
- H = height of fundamental triangle
= $0.86602540P$
- LE = length of engagement, in.
- n = threads per inch
- P = pitch, in.
= $1/n$
- TD = major diameter tolerance, internal thread
- Td = major diameter tolerance, external thread
- TD_1 = minor diameter tolerance, internal thread
- Td_1 = minor diameter tolerance, external thread
- TD_2 = pitch diameter tolerance, internal thread
- Td_2 = pitch diameter tolerance, external thread

5.8.1 External Thread

(a) *Allowance (External Threads)*

(1) for Classes 1A and 2A¹

$$es = 0.300 \times \text{Class 2A } Td_2$$

(2) for Class 3A, there is no allowance

(b) *Major Diameter Tolerance (External Threads)*

(1) for Class 1A

$$Td = 0.0900 \sqrt[3]{P^2}$$

(2) for Classes 2A and 3A

$$Td = 0.0600 \sqrt[3]{P^2}$$

(c) *Pitch Diameter Tolerance (External Threads)*

(1) for Class 1A¹

$$Td_2 = 1.5000 \times \text{Class 2A } Td_2$$

(2) for Class 2A

$$Td_2 = 0.0015 \sqrt[3]{D} + 0.0015 \sqrt{LE} + 0.0150 \sqrt[3]{P^2}$$

NOTE: See [Table 4](#) for the values of these terms corresponding to given values of diameter and length of engagement.

(3) for Class 3A¹

$$Td_2 = 0.7500 \times \text{Class 2A } Td_2$$

(d) *Minor Diameter Tolerance (External Threads)*

(1) for UNR classes, to intersection of rounded root with its centerline (see [Figures 7](#) and [8](#)),

$$Td_1 = Td_2 \text{ for class of thread specified} + 0.10825318P$$

(see [Table 5](#))

(2) for UN Classes 1A, 2A, and 3A, to intersection of flat root with flanks of threads (see [Figures 5](#) and [6](#)), threads

$$Td_1 = Td_2 \text{ for class of thread specified} + 0.21650635P$$

(see [Table 5](#))

(3) for UNJ Classes 2A and 3A, see [Figures 7](#) and [8](#), [para. 8.3.1\(f\)](#), and [Table 5](#)

5.8.2 Internal Thread

(a) *Major Diameter Tolerance (Internal Threads)*

for Classes 1B, 2B, and 3B

$$TD = 0.14433757 + TD_2 \text{ of the class of thread under consideration}$$

(see [Table 5](#))

(b) *Pitch Diameter Tolerance (Internal Threads)*

(1) for Class 1B¹

$$TD_2 = 1.9500 \times \text{Class 2A } Td_2$$

(2) for Class 2B¹

$$TD_2 = 1.3000 \times \text{Class 2A } Td_2$$

¹ Calculations shall use Class 2A pitch diameter tolerance, Td_2 , with six decimal places. Final values shall be rounded to four decimal places.

(3) for Class 3B¹

$$TD_2 = 0.9750 \times \text{Class 2A } Td_2$$

(c) *Minor Diameter Tolerance (Internal Threads)*

(1) for UN Classes 1B and 2B

(-a) for all thread series and special threads in sizes less than $\frac{1}{4}$ in.

$$Td_1 = \left(0.0500 \sqrt[3]{P^2} + 0.030 - P/D\right) - 0.002 \text{ in.}$$

within the following limitations:²

(-1) tolerances shall not be greater than 0.39400P

(-2) tolerances shall not be less than $0.2500P - 0.400P^2$

The formulas are suitable for general applications having lengths of engagement up to 1.5 diameters.

(-b) for all thread series and special threads $\frac{1}{4}$ in. and larger with

(-1) 80 threads/in. to 4 threads/in., inclusive

$$TD_1 = 0.2500P - 0.400P^2$$

(-2) less than 4 threads/in.

$$TD_1 = 0.1500P$$

(2) for UNJ, Class 2B

(-a) 13 threads/in. and finer

$$TD_1 = \left(0.0500 \sqrt[3]{P^2} + 0.0300P/D\right) - 0.002 \text{ in.}$$

within the following limitations:²

(-1) tolerances shall not be greater than 0.25980762P

(-2) tolerances shall not be less than 0.13531647P

(-b) 12 threads/in. and coarser

$$TD_1 = 0.1200P$$

The formulas are suitable for general applications having lengths of engagement up to 1.5 diameters.

(3) for UN, Class 3B

(-a) for all thread series

$$TD_1 = \left(0.0500 \sqrt[3]{P^2} + 0.0300P/D\right) - 0.002 \text{ in.}$$

within the following limitations:²

(-1) tolerance shall be not greater than 0.39400P

(-2) tolerance shall be not less than

(+a) for 80 threads/in. to 13 threads/in., inclusive, $0.2300P - 1.500P^2$

(+b) for 12 threads/in. and coarser, $0.1200P$

The formulas are suitable for general applications having lengths of engagement up to 1.5 diameters.

(4) for UNJ, Class 3B

(-a) 13 threads/in. and finer

$$TD_1 = \left(0.0500 \sqrt[3]{P^2} + 0.0300P/D\right) - 0.002 \text{ in.}$$

within the following limitations:²

(-1) tolerances shall not be greater than 0.25980762P

(-2) tolerances shall not be less than 0.13531647P

(-b) 12 threads/in. and coarser

$$TD_1 = 0.1200P$$

5.9 Lead and Flank Angle Tolerances

See [section 9](#).

5.10 Coated or Plated Threads

See [section 7](#) for dimensional accommodation and limits for coated threads.

5.11 Circular Runout

5.11.1 Circular Runout Is the Full Indicator Movement (FIM) (See ASME Y14.5). Runout of the crest (minor diameter of internal thread or major diameter of external thread) relative to the functional diameter cylinder shall not be so great that the basic profile is transgressed.

5.11.2 Internal Thread. Maximum runout, which will maintain the crest inside the basic thread profile, is the difference between the measured minor diameter and the basic minor diameter. An out-of-round functional diameter cylinder may reduce the available runout.

5.11.3 External Thread. Maximum runout, which will maintain the crest inside the basic thread profile, is the difference between the measured major diameter and the basic major diameter. An out-of-round functional diameter cylinder may reduce the available runout.

² Six-decimal-place values are used for the comparison of limitation values to the calculated TD_1 value; then the final determination is rounded to four places.

Table 4
Increments in Pitch Diameter Tolerance — Class 2A
(PD Tolerance = $0.0015 \sqrt[3]{D} + 0.0015\sqrt{LE} + 0.015 \sqrt[3]{P^2}$)

<i>D</i>	Incre- ments in <i>Td₂</i> in $0.0015 \sqrt[3]{D}$	<i>D</i>	Incre- ments in <i>Td₂</i> due to <i>D</i> in $0.0015 \sqrt[3]{D}$	1 <i>D</i> for sizes	9 <i>P</i> for TPI	20- <i>P</i> for TPI	<i>LE</i>	Incre- ments in <i>Td₂</i> due to <i>LE</i> 0.0015 $\sqrt{LE}$	1 <i>D</i> for sizes	9 <i>P</i> for TPI	20 <i>P</i> for TPI	<i>LE</i>	Incre- ments in <i>Td₂</i> due to <i>LE</i> 0.0015 $\sqrt{LE}$	1 <i>D</i> for sizes	20 <i>P</i> for TPI	<i>LE</i>	Incre- ments in <i>Td₂</i> due to <i>LE</i> 0.0015 $\sqrt{LE}$	TPI	Incre- ments in <i>Td₂</i> due to TPI 0.015 $\sqrt[3]{P^2}$
0.0600	0.000587	1.9375	0.001870	0	...	...	0.060000	0.000367	1/2	18	40	0.500000	0.001061	2 3/8	...	2.375000	0.002312	80	0.000808
0.0625	0.000595	2.0000	0.001890	1/16	...	...	0.062500	0.000375	...	...	36	0.555556	0.001118	2 1/2	8	2.500000	0.002372	72	0.000867
0.0730	0.000627	2.1250	0.001928	#1	...	...	0.073000	0.000405	9/16	16	...	0.562500	0.001125	2 5/8	...	2.625000	0.002430	64	0.000938
0.0860	0.000662	2.2500	0.001966	5/64	...	...	0.078125	0.000419	5/8	...	32	0.625000	0.001186	2 3/4	...	2.750000	0.002487	60	0.000979
0.0938	0.000682	2.3750	0.002001	#2	...	...	0.086000	0.000440	...	14	...	0.642857	0.001203	...	7	2.857143	0.002535	56	0.001025
0.0990	0.000694	2.5000	0.002036	3/32	...	...	0.093800	0.000459	11/16	...	...	0.687500	0.001244	2 7/8	...	2.875000	0.002543	50	0.001105
0.1120	0.000723	2.6250	0.002069	#3	...	...	0.099000	0.000472	...	13	...	0.692308	0.001248	3	...	3.000000	0.002598	48	0.001136
0.1250	0.000750	2.7500	0.002102	7/64	...	...	0.109400	0.000496	...	...	28	0.714286	0.001268	3 1/8	...	3.125000	0.002652	44	0.001204
0.1380	0.000775	2.8750	0.002133	#4	...	...	0.112000	0.000502	...	...	27	0.740741	0.001291	3 1/4	...	3.250000	0.002704	42	0.001241
0.1640	0.000821	3.0000	0.002163	...	80	...	0.112500	0.000503	3/4	12	...	0.750000	0.001299	...	6	3.333333	0.002739	40	0.001282
0.1875	0.000859	3.1250	0.002193	#5	72	...	0.125000	0.000530	...	11.5	...	0.782609	0.001327	3 3/8	...	3.375000	0.002756	36	0.001376
0.1900	0.000862	3.2500	0.002222	#6	...	...	0.138000	0.000557	13/16	...	...	0.812500	0.001352	3 1/2	...	3.500000	0.002806	34	0.001429
0.2160	0.000900	3.3750	0.002250	...	64	...	0.140625	0.000563	...	11	...	0.818182	0.001357	3 5/8	...	3.625000	0.002856	32	0.001488
0.2500	0.000945	3.5000	0.002277	5/32	...	...	0.156300	0.000593	...	...	24	0.833333	0.001369	3 3/4	...	3.750000	0.002905	30	0.001554
0.3125	0.001018	3.6250	0.002304	...	56	...	0.160714	0.000601	7/8	...	...	0.875000	0.001403	3 7/8	...	3.875000	0.002953	28	0.001627
0.3750	0.001082	3.7500	0.002330	#8	...	...	0.164000	0.000607	...	10	...	0.900000	0.001423	4	5	4.000000	0.003000	27	0.001667
0.4375	0.001139	3.8750	0.002356	11/64	...	...	0.171900	0.000622	15/16	...	...	0.937500	0.001452	4 1/8	...	4.125000	0.003047	26	0.001709
0.5000	0.001191	4.0000	0.002381	3/16	48	...	0.187500	0.000650	1"	9	20	1.000000	0.001500	4 1/4	...	4.250000	0.003092	24	0.001803
0.5625	0.001238	4.1250	0.002406	#10	...	...	0.190000	0.000654	1 1/16	...	...	1.062500	0.001546	4 3/8	...	4.375000	0.003137	22	0.001910
0.6250	0.001282	4.2500	0.002430	13/64	...	...	0.203100	0.000676	...	...	18	1.111111	0.001581	...	4.5	4.444444	0.003162	20	0.002036
0.6875	0.001324	4.3750	0.002453	...	44	...	0.204545	0.000678	1 1/8	8	...	1.125000	0.001591	4 1/2	...	4.500000	0.003182	18	0.002184
0.7500	0.001363	4.5000	0.002476	#12	...	...	0.216000	0.000697	1 3/16	...	...	1.187500	0.001635	4 5/8	...	4.625000	0.003226	16	0.002362
0.8125	0.001400	4.6250	0.002499	7/32	...	...	0.218800	0.000702	1 1/4	...	16	1.250000	0.001677	4 3/4	...	4.750000	0.003269	14	0.002582
0.8750	0.001435	4.7500	0.002521	...	40	...	0.225000	0.000712	...	7	...	1.285714	0.001701	4 7/8	...	4.875000	0.003312	13	0.002713
0.9375	0.001468	4.8750	0.002543	15/64	...	...	0.234400	0.000726	1 5/16	...	...	1.312500	0.001718	5	4	5.000000	0.003354	12	0.002862
1.0000	0.001500	5.0000	0.002565	1/4	36	80	0.250000	0.000750	1 3/8	...	...	1.375000	0.001759	5 1/8	...	5.125000	0.003396	11.5	0.002944
1.0625	0.001531	5.1250	0.002586	17/64	...	...	0.265600	0.000773	...	...	14	1.428571	0.001793	5 1/4	...	5.250000	0.003437	11	0.003033
1.1250	0.001560	5.2500	0.002607	...	...	72	0.277778	0.000791	1 7/16	...	...	1.437500	0.001798	5 3/8	...	5.375000	0.003478	10	0.003232
1.1875	0.001588	5.3750	0.002628	...	32	...	0.281250	0.000795	1 1/2	6	...	1.500000	0.001837	5 1/2	...	5.500000	0.003518	9	0.003467
1.2500	0.001616	5.5000	0.002648	19/64	...	...	0.296900	0.000817	...	...	13	1.538462	0.001861	5 5/8	...	5.625000	0.003558	8	0.003750

Table 4
Increments in Pitch Diameter Tolerance — Class 2A
(PD Tolerance = $0.0015 \sqrt[3]{D} + 0.0015\sqrt{LE} + 0.015 \sqrt[3]{P^2}$) (Cont'd)

<i>D</i>	Increments in Td_2 0.0015 $\sqrt[3]{D}$	<i>D</i>	Increments in Td_2 due to <i>D</i> 0.0015 $\sqrt[3]{D}$	1 <i>D</i> for sizes	9 <i>P</i> for TPI	20- <i>P</i> for TPI	<i>LE</i>	Increments in Td_2 due to <i>LE</i> 0.0015 $\sqrt{LE}$	1 <i>D</i> for sizes	9 <i>P</i> for TPI	20 <i>P</i> for TPI	<i>LE</i>	Increments in Td_2 due to <i>LE</i> 0.0015 $\sqrt{LE}$	1 <i>D</i> for sizes	20 <i>P</i> for TPI	<i>LE</i>	Increments in Td_2 due to <i>LE</i> 0.0015 $\sqrt{LE}$	TPI	Increments in Td_2 due to TPI 0.015 $\sqrt[3]{P^2}$
1.3125	0.001642	5.6250	0.002668	$\frac{5}{16}$	...	64	0.312500	0.000839	$1\frac{9}{16}$	...	...	1.562500	0.001875	$5\frac{3}{4}$	...	5.750000	0.003597	7	0.004099
1.3750	0.001668	5.7500	0.002687	...	28	...	0.321429	0.000850	$1\frac{5}{8}$	...	...	1.625000	0.001912	$5\frac{7}{8}$	...	5.875000	0.003636	6	0.004543
1.4375	0.001693	5.8750	0.002707	$2\frac{1}{64}$	...	...	0.328100	0.000859	...	...	12	1.666667	0.001936	6	...	6.000000	0.003674	5.5	0.004814
1.5000	0.001717	6.0000	0.002726	...	27	60	0.333333	0.000866	$1\frac{11}{16}$	...	...	1.687500	0.001949	$6\frac{1}{2}$	...	6.500000	0.003824	5	0.005130
1.5625	0.001741	7.0000	0.002869	$1\frac{1}{32}$	...	...	0.343800	0.000880	...	...	11.5	1.739130	0.001978	7	...	7.000000	0.003969	4.5	0.005503
1.6250	0.001764	8.0000	0.003000	...	...	56	0.357143	0.000896	$1\frac{3}{4}$	...	...	1.750000	0.001984	$7\frac{1}{2}$	...	7.500000	0.004108	4	0.005953
1.6875	0.001786	9.0000	0.003120	$2\frac{3}{64}$	...	...	0.359400	0.000899	...	5	...	1.800000	0.002012	8	...	8.000000	0.004243	...	...
1.7500	0.001808	10.00- 00	0.003232	$\frac{3}{8}$	24	...	0.375000	0.000919	$1\frac{13}{16}$	...	...	1.812500	0.002019	$8\frac{1}{2}$	...	8.500000	0.004373	...	...
1.8125	0.001829	12.00- 00	0.003434	$2\frac{5}{64}$	...	...	0.390600	0.000937	...	...	11	1.818182	0.002023	9	...	9.000000	0.004500	...	...
1.8750	0.001850	14.00- 00	0.003615	$1\frac{3}{32}$	...	...	0.406300	0.000956	$1\frac{7}{8}$	...	...	1.875000	0.002054	$9\frac{1}{2}$	...	9.500000	0.004623	...	...
...	...	16.00- 00	0.003780	...	...	48	0.416667	0.000968	$1\frac{15}{16}$	...	...	1.937500	0.002088	10	...	10.000000	0.004743	...	...
...	...	18.00- 00	0.003931	$2\frac{7}{64}$	...	...	0.421900	0.000974	2	4.5	10	2.000000	0.002121	$10\frac{1}{2}$	...	10.500000	0.004861	...	...
...	...	20.00- 00	0.004072	$\frac{7}{16}$	...	...	0.437500	0.000992	$2\frac{1}{8}$	...	...	2.125000	0.002187	11	...	11.000000	0.004975	...	...
...	...	24.00- 00	0.004327	...	20	...	0.450000	0.001006	...	...	9	2.222222	0.002236	$11\frac{1}{2}$	...	11.500000	0.005087	...	...
...	...	...	...	...	...	44	0.454545	0.001011	$2\frac{1}{4}$	4	...	2.250000	0.002250	12	...	12.000000	0.005196	...	...

Legend:

D = diameter

LE = length of engagement

P = pitch

Td_2 = pitch diameter tolerance, external

TPI = threads per inch

NOTE: (1) For example: *LE* = 0.5000 is equivalent to one diameter for the $\frac{1}{2}$ in. size, 9 pitches for 18 threads per inch, or 20 pitches for 40 threads per inch.

Table 5
Basic Profile and Constants for Calculation Formulas of Thread Dimensions, in.

Reference Only [Note (1)]		0.1250 <i>H</i>	0.1443 <i>H</i>	0.1667 <i>H</i>	0.17333333 <i>H</i>	0.1875 <i>H</i>
Threads/in.	Pitch, $P = 1/n$	UN/UNJ Truncation of Internal Thread Root and External Thread Crest, $f_{rn} = f_{es} =$ 0.10825318 <i>P</i>	UN/UNJ Flat at Internal Thread Root and External Thread Crest, $F_{rn} =$ $F_{cs} = P/8 =$ 0.12500000 <i>P</i>	UN/UNR External Thread Root Full Radius, Max., $r_{rs} =$ 0.14433757 <i>P</i>	UNJ Min. External Thread Root Radius, r min. = 0.15011107 <i>P</i>	Truncation of UNR Design Profile External Thread Root and Half Addendum of UNR/UNJ External Thread, $S_{rs} =$ 0.16237976 <i>P</i>
		3 [Note (2)]	4	5	6	7
80	0.01250000	0.001353	0.001563	0.001804	0.0019	0.002030
72	0.01388889	0.001504	0.001736	0.002005	0.0021	0.002255
64	0.01562500	0.001691	0.001953	0.002255	0.0023	0.002537
56	0.01785714	0.001933	0.002232	0.002577	0.0027	0.002900
48	0.02083333	0.002255	0.002604	0.003007	0.0031	0.003383
44	0.02272727	0.002460	0.002841	0.003280	0.0034	0.003690
40	0.02500000	0.002706	0.003125	0.003608	0.0038	0.004059
36	0.02777778	0.003007	0.003472	0.004009	0.0042	0.004511
32	0.03125000	0.003383	0.003906	0.004511	0.0047	0.005074
28	0.03571429	0.003866	0.004464	0.005155	0.0054	0.005799
27	0.03703704	0.004009	0.004630	0.005346	0.0056	0.006014
24	0.04166667	0.004511	0.005208	0.006014	0.0063	0.006766
20	0.05000000	0.005413	0.006250	0.007217	0.0075	0.008119
18	0.05555556	0.006014	0.006944	0.008019	0.0083	0.009021
16	0.06250000	0.006766	0.007813	0.009021	0.0094	0.010149
14	0.07142857	0.007732	0.008929	0.010310	0.0107	0.011599
13	0.07692308	0.008327	0.009615	0.011103	0.0115	0.012491
12	0.08333333	0.009021	0.010417	0.012028	0.0125	0.013532
11.5	0.08695652	0.009413	0.010870	0.012551	0.0131	0.014120
11	0.09090909	0.009841	0.011364	0.013122	0.0136	0.014762
10	0.10000000	0.010825	0.012500	0.014434	0.0150	0.016238
9	0.11111111	0.012028	0.013889	0.016038	0.0167	0.018042
8	0.12500000	0.013532	0.015625	0.018042	0.0188	0.020297
7	0.14285714	0.015465	0.017857	0.020620	0.0214	0.023197
6	0.16666667	0.018042	0.020833	0.024056	0.0250	0.027063
5	0.20000000	0.021651	0.025000	0.028868	0.0300	0.032476
4.5	0.22222222	0.024056	0.027778	0.032075	0.0334	0.036084
4	0.25000000	0.027063	0.031250	0.036084	0.0375	0.040595

Table 5
Basic Profile and Constants for Calculation Formulas of Thread Dimensions, in.

Reference Only [Note (1)]		0.20833333H	0.2500H	0.2887H	0.3125H	0.3608H	0.375H	0.5000H
Threads/in.	Pitch, $P = 1/n$	UN Basic Flat at Internal Thread Crest and External Thread Root, $F_{rs} = F_{cn} = P/4 =$						Half the Height of Sharp V-UN, UNR, and UNJ Thread
		UNJ Max. External Thread Root Radius, $r_{\max} =$	UN External Thread Truncation of Internal Thread Crest, $f_{rs} = f_{cn} =$	UN Thread Root, $F_{rs} = F_{cn} =$	Truncation of UNJ Internal Thread Crest	Flat at UNJ Internal Thread Crest	UN, UNR, UNJ Addendum of External Thread, $h_{as} =$	
		0.18042196P	0.21650635P	0.25000000P	0.27063294P	0.31250000P	0.32475953P	0.43301270P
1	2	8	9 [Note (3)]	10	11	12	13 [Notes (4), (5)]	14
80	0.01250000	0.0023	0.002706	0.003125	0.003383	0.003906	0.004059	0.005413
72	0.01388889	0.0025	0.003007	0.003472	0.003759	0.004340	0.004511	0.006014
64	0.01562500	0.0028	0.003383	0.003906	0.004229	0.004883	0.005074	0.006766
56	0.01785714	0.0032	0.003866	0.004464	0.004833	0.005580	0.005799	0.007732
48	0.02083333	0.0038	0.004511	0.005208	0.005638	0.006510	0.006766	0.009021
44	0.02272727	0.0041	0.004921	0.005682	0.006151	0.007102	0.007381	0.009841
40	0.02500000	0.0045	0.005413	0.006250	0.006766	0.007813	0.008119	0.010825
36	0.02777778	0.0050	0.006014	0.006944	0.007518	0.008681	0.009021	0.012028
32	0.03125000	0.0056	0.006766	0.007813	0.008457	0.009766	0.010149	0.013532
28	0.03571429	0.0064	0.007732	0.008929	0.009665	0.011161	0.011599	0.015465
27	0.03703704	0.0067	0.008019	0.009259	0.010023	0.011574	0.012028	0.016038
24	0.04166667	0.0075	0.009021	0.010417	0.011276	0.013021	0.013532	0.018042
20	0.05000000	0.0090	0.010825	0.012500	0.013532	0.015625	0.016238	0.021651
18	0.05555556	0.0100	0.012028	0.013889	0.015035	0.017361	0.018042	0.024056
16	0.06250000	0.0113	0.013532	0.015625	0.016915	0.019531	0.020297	0.027063
14	0.07142857	0.0129	0.015465	0.017857	0.019331	0.022321	0.023197	0.030929
13	0.07692308	0.0139	0.016654	0.019231	0.020818	0.024038	0.024982	0.033309
12	0.08333333	0.0150	0.018042	0.020833	0.022553	0.026042	0.027063	0.036084
11.5	0.08695652	0.0157	0.018827	0.021739	0.023533	0.027174	0.028240	0.037653
11	0.09090909	0.0164	0.019682	0.022727	0.024603	0.028409	0.029524	0.039365
10	0.10000000	0.0180	0.021651	0.025000	0.027063	0.031250	0.032476	0.043301
9	0.11111111	0.0200	0.024056	0.027778	0.030070	0.034722	0.036084	0.048113
8	0.12500000	0.0226	0.027063	0.031250	0.033829	0.039063	0.040595	0.054127
7	0.14285714	0.0258	0.030929	0.035714	0.038662	0.044643	0.046394	0.061859
6	0.16666667	0.0301	0.036084	0.041667	0.045105	0.052083	0.054127	0.072169
5	0.20000000	0.0361	0.043301	0.050000	0.054127	0.062500	0.064952	0.086603
4.5	0.22222222	0.0401	0.048113	0.055556	0.060141	0.069444	0.072169	0.096225
4	0.25000000	0.0451	0.054127	0.062500	0.067658	0.078125	0.081190	0.108253

Table 5
Basic Profile and Constants for Calculation Formulas of Thread Dimensions, in.

Reference Only [Note (1)]		0.5625H	0.57735H	0.58333H	0.625H	0.65336H	0.66667H
Threads/in.	Pitch, $P = 1/n$	UNJ Height of Internal Thread and Depth of Thread Engagement 0.48713929P	UN, UNR, and UNJ Pitch Line 0.50000000P	UNJ Difference Between Max. Pitch Dia. and Max. Minor Dia. of Ext. Thread 0.50518149P	Height of UN External Thread, h_s , Height of UN/UNR Internal Thread, h_r , and Depth of UN/UNR Thread Engagement, $h_e =$ 0.54126588P	UNJ Difference Between Min. Pitch Dia. and Min. Minor Dia. of Ext. Thread = 0.56580540P	UNJ Height of External Thread, $h_s =$ 0.57735027P
		15	16	17	18 [Note (5)]	19	20 [Note (5)]
80	0.01250000	0.006089	0.006250	0.006315	0.006766	0.007073	0.007217
72	0.01388889	0.006766	0.006944	0.007016	0.007518	0.007858	0.008019
64	0.01562500	0.007612	0.007813	0.007893	0.008457	0.008841	0.009021
56	0.01785714	0.008699	0.008929	0.009021	0.009665	0.010104	0.010310
48	0.02083333	0.010149	0.010417	0.010525	0.011276	0.011788	0.012028
44	0.02272727	0.011071	0.011364	0.011481	0.012301	0.012859	0.013122
40	0.02500000	0.012178	0.012500	0.012630	0.013532	0.014145	0.014434
36	0.02777778	0.013532	0.013889	0.014033	0.015035	0.015717	0.016038
32	0.03125000	0.015223	0.015625	0.015787	0.016915	0.017681	0.018042
28	0.03571429	0.017398	0.017857	0.018042	0.019331	0.020207	0.020620
27	0.03703704	0.018042	0.018519	0.018710	0.020047	0.020956	0.021383
24	0.04166667	0.020297	0.020833	0.021049	0.022553	0.023575	0.024056
20	0.05000000	0.024357	0.025000	0.025259	0.027063	0.028290	0.028868
18	0.05555556	0.027063	0.027778	0.028066	0.030070	0.031434	0.032075
16	0.06250000	0.030446	0.031250	0.031574	0.033829	0.035363	0.036084
14	0.07142857	0.034796	0.035714	0.036084	0.038662	0.040415	0.041239
13	0.07692308	0.037472	0.038462	0.038860	0.041636	0.043523	0.044412
12	0.08333333	0.040595	0.041667	0.042098	0.045105	0.047150	0.048113
11.5	0.08695652	0.042360	0.043478	0.043929	0.047067	0.049200	0.050204
11	0.09090909	0.044285	0.045455	0.045926	0.049206	0.051437	0.052486
10	0.10000000	0.048714	0.050000	0.050518	0.054127	0.056581	0.057735
9	0.11111111	0.054127	0.055556	0.056131	0.060141	0.062867	0.064150
8	0.12500000	0.060892	0.062500	0.063148	0.067658	0.070726	0.072169
7	0.14285714	0.069591	0.071429	0.072169	0.077324	0.080829	0.082479
6	0.16666667	0.081190	0.083333	0.084197	0.090211	0.094301	0.096225
5	0.20000000	0.097428	0.100000	0.101036	0.108253	0.113161	0.115470
4.5	0.22222222	0.108253	0.111111	0.112263	0.120281	0.125735	0.128300
4	0.25000000	0.121785	0.125000	0.126295	0.135316	0.141451	0.144338

Table 5
Basic Profile and Constants for Calculation Formulas of Thread Dimensions, in.

Reference Only [Note (1)]		0.7500H	0.9167H	H	1.125H	1.2500H		
		Height of UNR External Thread, $h_s =$	UN, UNR, and UNJ Twice the External Thread Addendum, $h_b = 2h_{as} =$	UN, UNR, and UNJ Difference Between Max. Major and Pitch Diameters of Internal Thread =	UN, UNR, and UNJ Height of Sharp V-Thread =	Double Height of UNJ Internal Thread	Double Height of Internal Thread and External UN Thread, $2h_n =$	Double Height of External UNR Thread, $2h_s =$
Threads/in.	Pitch, $P = 1/n$	0.61343466P	0.64951905P	0.79385662P	0.86602540P	0.97427858P	1.08253175P	1.22686932P
1	2	21	22	23	24	25	26	27
80	0.01250000	0.007668	0.008119	0.009923	0.010825	0.012178	0.013532	0.015336
72	0.01388889	0.008520	0.009021	0.011026	0.012028	0.013532	0.015035	0.017040
64	0.01562500	0.009585	0.010149	0.012404	0.013532	0.015223	0.016915	0.019170
56	0.01785714	0.010954	0.011599	0.014176	0.015465	0.017398	0.019331	0.021908
48	0.02083333	0.012780	0.013532	0.016539	0.018042	0.020297	0.022553	0.025560
44	0.02272727	0.013942	0.014762	0.018042	0.019682	0.022143	0.024603	0.027883
40	0.02500000	0.015336	0.016238	0.019846	0.021651	0.024357	0.027063	0.030672
36	0.02777778	0.017040	0.018042	0.022052	0.024056	0.027063	0.030070	0.034080
32	0.03125000	0.019170	0.020297	0.024808	0.027063	0.030446	0.033829	0.038340
28	0.03571429	0.021908	0.023197	0.028352	0.030929	0.034796	0.038662	0.043817
27	0.03703704	0.022720	0.024056	0.029402	0.032075	0.036084	0.040094	0.045440
24	0.04166667	0.025560	0.027063	0.033077	0.036084	0.040595	0.045105	0.051120
20	0.05000000	0.030672	0.032476	0.039693	0.043301	0.048714	0.054127	0.061343
18	0.05555556	0.034080	0.036084	0.044103	0.048113	0.054127	0.060141	0.068159
16	0.06250000	0.038340	0.040595	0.049616	0.054127	0.060892	0.067658	0.076679
14	0.07142857	0.043817	0.046394	0.056704	0.061859	0.069591	0.077324	0.087634
13	0.07692308	0.047187	0.049963	0.061066	0.066617	0.074945	0.083272	0.094375
12	0.08333333	0.051120	0.054127	0.066155	0.072169	0.081190	0.090211	0.102239
11.5	0.08695652	0.053342	0.056480	0.069031	0.075307	0.084720	0.094133	0.106684
11	0.09090909	0.055767	0.059047	0.072169	0.078730	0.088571	0.098412	0.111534
10	0.10000000	0.061343	0.064952	0.079386	0.086603	0.097428	0.108253	0.122687
9	0.11111111	0.068159	0.072169	0.088206	0.096225	0.108253	0.120281	0.136319
8	0.12500000	0.076679	0.081190	0.099232	0.108253	0.121785	0.135316	0.153359
7	0.14285714	0.087634	0.092788	0.113408	0.123718	0.139183	0.154647	0.175267
6	0.16666667	0.102239	0.108253	0.132309	0.144338	0.162380	0.180422	0.204478
5	0.20000000	0.122687	0.129904	0.158771	0.173205	0.194856	0.216506	0.245374
4.5	0.22222222	0.136319	0.144338	0.176413	0.192450	0.216506	0.240563	0.272638
4	0.25000000	0.153359	0.162380	0.198464	0.216506	0.243570	0.270633	0.306717

Table 5
Basic Profile and Constants for Calculation Formulas of Thread Dimensions, in. (Cont'd)

GENERAL NOTE: All thread calculations are to be performed using a function of pitch, P ; the use of thread height, H , is for reference only, as stated in ASME B1.30.

NOTES:

- (1) The thread values based on function of height, H , are used for reference only. On June 29, 1992, ASME B1.30M was approved as an American National Standard, stating that all thread calculations are to be performed using a function of pitch, P , not a function of thread height, H . As the H functions shown here are for reference only, the number of decimal places shown for each does not necessarily follow the ASME B1.30 rules, but for consistency they are shown with the same number of decimal places as used in previous versions of ASME B1.1 and ASME B1.15.
- (2) The values tabulated in Column 3 also pertain to the minimum root radius of UNR screw threads. See [paras. 2.3.1.1](#) and [2.3.1.1\(a\)](#).
- (3) $h_{an} = f_{cn} = 0.250H = 0.21650635P$.
- (4) $h_{dn} = f_{as} = 0.375H = 0.32475953P$.
- (5) The constants in Columns 13, 18, and 20 are the rounded value of half their respective values in Columns 22, 26, and 27. The values in Columns 22, 26, and 27 must be used in calculations to avoid the possible difference due to rounding.

6 SCREW THREAD DESIGNATION

6.1 Basic Method of Designating

The designation specifies in sequence the nominal size, number of threads per inch, thread series symbol, thread class symbol, and gaging system per ASME B1.3 (see [Figure 13](#)). The nominal size is the basic major diameter and is specified as a fractional diameter, machine screw number, or the decimal equivalent. Where decimal equivalents are used for size callout, they shall be shown in four-place decimals (omitting the cipher in the fourth place) for fractional sizes, and in three-place decimals for number sizes. They shall be interpreted as being nominal size designations only and shall have no dimensional significance beyond the fractional size or number designation. The thread series symbol indicates the thread form, series, and tolerance formulation. The thread series symbols for the UN thread form are UNC, UNF, UNEF, or UN for only those sizes of the various series shown in [Table 1](#) and UNS for any other diameter–pitch combination having tolerances to unified formulation.

The thread series symbols for the UNR thread form are UNRC, UNRF, UNREF, or UNR for only those sizes of the various series shown in [Table 1](#) and UNRS for any other diameter–pitch combination having tolerances to unified formulation.

The thread series symbols for the UNJ thread form are UNJC, UNJF, UNJEF, or UNJ for only those sizes of the various series shown in [Table 1](#) and UNJS for any other diameter–pitch combination having tolerances to unified formulation.

The basic method of designating a screw thread is used where the standard tolerances or limits of size based on the standard length of engagement are applicable, as indicated in [Figure 13](#).

6.2 Method of Designating Coated Threads

Specification on drawings of the before- and after-coating dimensions for screw threads is sometimes dictated by an engineering or production consideration that the size before and after coating be controlled. This results from coated screw threads having two stages of design, the before-coating stage and the after-coating stage. The threaded product may be produced by a supplier and coated by a user. In this case, it is necessary that a clear understanding of the coating requirements and the allowance for coating buildup be agreed upon by both supplier and user (see [section 7](#)).

The before-coating (plating) dimensions have a definite bearing on the strength of the screw threads. The before-coating stage is, therefore, decidedly an engineering consideration; it is also a production consideration when requiring that proper allowance be made for the specified coating thickness. The finished parts should be of a size after coating that will allow them to be assembled with their coating components as intended.

Recommended methods for designating coated thread under various conditions are described in [para. 6.2.1](#).

6.2.1 For coated (or plated) Class 2A external threads, the basic (maximum) major and basic (maximum) pitch diameters shall be given, preceded by the words AFTER COATING. The major and pitch diameter limits of size before coating shall also be given, preceded by the words BEFORE COATING.

EXAMPLE: $\frac{3}{4}$ -10-UNC-2A (21)

AFTER COATING (from [Table 2A](#) for Class 3A)

Maximum major diameter 0.7500

Maximum pitch diameter (PD) 0.6850

BEFORE COATING (from [Table 2A](#) for Class 2A)

Major diameter 0.7482 – 0.7353

PD 0.6832 – 0.6773

Threads accepted to Class 2A limits before coating are accepted after coating by basic size Class 3A GO thread gages. The allowance given in the dimensional tables

for Class 2A thread is sufficient to allow for a limited amount of coating as described in [section 7](#). However, if a greater coating thickness is required, it will be necessary to calculate the before-coating limits in accordance with [section 7](#).

6.2.2 For coated (or plated) Class 3A external threads, the maximum major and maximum pitch diameters may optionally be given, preceded by the words AFTER COATING, thereby indicating that the thread before coating must have special provisions to allow for coating thickness. The major and pitch diameter limits of size before coating (calculated in accordance with [section 7](#)) shall be given, followed by the letters “SPL” (special) and preceded by the words BEFORE COATING.

EXAMPLE: $\frac{1}{4}$ -28-UNF-3A (21), given a thickness of coating 0.0002 in. to 0.0003 in.

AFTER COATING (use of maximum major diameter and PD optional)

Maximum major diameter 0.2500
Maximum PD 0.2268

BEFORE COATING

Major diameter 0.2494 – 0.2431 SPL
PD 0.2256 – 0.2235 SPL

6.2.3 For coated (or plated) Class 1A external threads, the maximum major and maximum pitch diameters may optionally be given, preceded by the words AFTER COATING, thereby indicating that the thread before coating must have special provisions to allow for coating thickness. The major and pitch diameter limits of size before coating (calculated in accordance with [section 7](#)) shall be given, followed by the letters “SPL” (special) and preceded by the words BEFORE COATING.

EXAMPLE: $\frac{1}{4}$ -20-UNC-1A (21), given a thickness of coating 0.0002 in. to 0.0003 in.

AFTER COATING (use of maximum major diameter and PD optional)

Maximum major diameter 0.2489
Maximum PD 0.2164

BEFORE COATING

Major diameter 0.2483 – 0.2363 SPL
PD 0.2152 – 0.2100 SPL

6.2.4 Where an allowance is required to accommodate coating (or plating) on Class 1B, Class 2B, or Class 3B internal threads, the minimum minor and minimum pitch diameters may optionally be given, preceded by the words AFTER COATING. The minor and pitch diameter limits of size before coating (calculated in accordance with

[section 7](#)) shall be given, followed by the letters “SPL” (special) and preceded by the words BEFORE COATING.

EXAMPLE 1: $\frac{1}{4}$ -20-UNC-1B (21), given a thickness of coating 0.0002 in. to 0.0003 in.

AFTER COATING Minimum minor diameter 0.196

Minimum PD 0.2175

(This information optional)

BEFORE COATING

Minor diameter 0.197 to 0.207 SPL

PD 0.2187 – 0.2256 SPL

EXAMPLE 2: $\frac{3}{4}$ -10-UNC-2B (22), given a thickness of coating 0.0002 in. to 0.0003 in.

AFTER COATING Minimum minor diameter 0.642

Minimum PD 0.6850

(This information optional)

BEFORE COATING

Minor diameter 0.643 to 0.663 SPL

PD 0.6862 – 0.6935 SPL

EXAMPLE 3:

$\frac{1}{4}$ -28-UNF-3B (23), given a thickness of coating 0.0002 in. to 0.0003 in.

AFTER COATING Minimum minor diameter 0.2110

Minimum PD 0.2268

(This information optional)

BEFORE COATING

Minor diameter 0.2116 to 0.2194 SPL

PD 0.2280 – 0.2308 SPL

NOTE: The after-coating limits for all of the examples above are the minor and PD values in [Table 2B](#) for the respective class of thread.

6.3 Method of Designating Left-Hand Threads

Unless otherwise specified, threads are right hand; a left-hand thread shall be designated LH as shown in the following example: $\frac{1}{4}$ -20-UNC-3A-LH (21).

6.4 Method of Designating Special Unified Threads

UNS, UNRS, and UNJS threads are special combinations of diameter and pitch with tolerance to unified formulation.

EXAMPLE 1: $\frac{1}{4}$ -24-UNS-3A (21)

Major diameter 0.2500 – 0.2428

PD 0.2229 – 0.2201

Maximum minor diameter 0.2049

EXAMPLE 2: 0.4950-20-UNS-3A (21)

Major diameter 0.4950 – 0.4869

PD 0.4625 – 0.4593

Maximum minor diameter 0.4409

EXAMPLE 3: 1.200-10-UNS-2B (21)

Minor diameter 1.092 to 1.113

PD 1.1350 to 1.1432

Minimum major diameter 1.200

EXAMPLE 4: 0.2800-28-UNJS-3A (22)

Major diameter 0.2735 to 0.2800

PD 0.2542 to 0.2568

Minor diameter 0.2340 to 0.2388

Root radius 0.0054 to 0.0064

EXAMPLE 5: 0.2800-28-UNJS-3B (22)

Major diameter 0.2800 min.

PD 0.2568 to 0.2601

Minor diameter 0.2452 to 0.2529

Root radius 0.0054 to 0.0064

6.5 Designations for Other Threads

Threads having tolerances that do not conform to unified formulation and threads having multiple start or lead or special form also require additional considerations in the thread designation. The recommended methods of designating these threads are described in [paras. 6.5.1](#) through [6.5.3](#).

6.5.1 Method of Designating Threads Having Tolerances Not to Unified Formulation. If a standard series thread is altered in any respect other than revised pitch diameter limits for a special length of engagement, the modification of crests, or the adjustment of the limits of size to accommodate coating, as shown above, it is designated in accordance with the example herein.

EXAMPLE: $\frac{1}{2}$ -13 Unified Form SPL-INT (22)

Minor diameter 0.424 to 0.434 SPL

PD 0.4500 to 0.4580 SPL

Minimum major diameter 0.5000

LE 0.50

6.5.2 Method of Designating Multiple Start Threads. If a thread is required with a multiple start or lead, it is designated by specifying in sequence the nominal size, pitch (in decimals or threads per inch), and lead (in decimals or number of starts), thread series, class, and gaging

system in parenthesis if required as in the examples herein.

EXAMPLE 1: $\frac{3}{4}$ -0.0625P -0.1875L-UNF SPL-EXT (23)

Major diameter 0.7485 – 0.7391

PD 0.7079 SPL – 0.7003 SPL

Maximum minor diameter 0.6808

LE 0.75

EXAMPLE 2: $\frac{3}{4}$ -16-0.1875L-UNF-2A (21)

Specifying the threads per inch (TPI) will help ensure the determination of the proper decimal pitch value. When converting TPI to decimal pitch, the values may need to be carried out to eight decimal places in order to state the proper decimal value for pitch and lead. For example, $\frac{3}{4}$ -16-(3 START)-UNF-2B means the same thing as 0.7500-0.0625P-0.1875L-UNF-2B. If the decimal pitch is properly stated, the decimal lead should mathematically be equal to the decimal pitch times the number of starts.

Premature rounding of decimal pitch or lead values or both may yield improper results; for example, 0.7500-0.063P-0.188L-UNF-2B is incorrect.

6.5.3 Method of Designating Special Form Threads. If a thread for design consideration requires a variation from unified standard thread contour and is not covered by another recognized standard, such as when the detail of the root differs from that for the standard thread form, the designation shall not include either the letter “U” or the word “Unified.”

EXAMPLE: $\frac{7}{8}$ -18 SPL 60-deg Form-EXT (22)

Major diameter 0.8750 – 0.8668

PD 0.8384 – 0.8343

Maximum minor diameter 0.8068

LE 0.69

6.6 Method of Designating Threads Having Special Length of Engagement

In the assembly of threads in mating parts, the length of engagement varies according to the design requirements. It should be noted that the length of engagement is not necessarily the same as the full thread length provided on the part, but is the amount or length of thread engaged when mating parts are assembled.

Where a standard series thread has a special length of engagement differing from that for which the standard pitch diameter tolerances are applicable as indicated in [section 5](#), the thread class symbol is qualified by the addition of the letters SE (special engagement) preceding the class symbol. The specification of the special pitch diameter limits of size and the length of engagement,

rounded to a two-place decimal, are a requirement, as shown in the examples herein.

EXAMPLE 1: $\frac{1}{2}$ -13-UNC-SE2A (23)

PD 0.4485 – 0.4431

LE 1.00

EXAMPLE 2: $\frac{1}{4}$ -24-UNS-SE3A (23)

Major diameter 0.2500 – 0.2428

PD 0.2229 – 0.2198

LE 0.88

NOTE: Past editions of this Standard provided examples of how some situations previously included in [para. 5.3](#) were designated. These were examples only and not requirements. Because of this, they are no longer part of this Standard and have been moved to [Nonmandatory Appendix F](#) for historical and reference purposes.

6.7 Method of Designating Threads Having Modified Crests

It is occasionally necessary to modify the limits of size of the major diameter of an external thread or the minor diameter of an internal thread within the maximum material limits established for standard series and special threads in order to fit a specific purpose, but without change in class of thread or pitch diameter limits. (It should be noted that standard thread gages may be used to accept such threads.) Such threads shall be specified with the established thread designation, followed by a statement of the modified diameter limits and the designation MOD. This practice also applies to modifications of internal thread minor diameters described in [para. 5.6.1](#).

NOTE: Threads having modified roots can be designated in a similar way but cannot be inspected or evaluated with standard gages.

EXAMPLE 1: $\frac{3}{8}$ -24-UNF-3A MOD (21)

Major diameter 0.3720 – 0.3648 MOD

EXAMPLE 2: $\frac{1}{2}$ -10-UNS-3B MOD (21)

Minor diameter 1.3980 to 1.4090 MOD

PD 1.4350 to 1.4412

Minimum major diameter 1.5000

7 DIMENSIONAL ACCOMMODATION OF COATING OR PLATING FOR 60-DEG THREADS

7.1 Introduction

It is not within the scope of this Standard to make recommendations for thickness of, or to specify limits for, coatings. However, this Standard will aid mechanical interchangeability if certain principles are followed wherever conditions permit. The guidelines in [paras. 7.7](#) through [7.9](#) should be helpful in determining the amount and direction of the alterations to establish applicable limits of before-coating thread size with a 60-deg included angle.

Some commonly used and firmly established processes for heavy coatings do not fall within the scope of this Standard.

When coating threads with dry film lubricant, an adjustment in pitch diameter to accommodate the thickness of solid film lubricant is not in addition to that specified in [paras 7.7](#) through [7.9](#). The product thread, before application of solid film lubricant, shall comply with after-coated dimensions.

NOTE: The term “coating” refers to one or more applications of additive material to threads including, but not limited to, electroplated deposits, dip-spin applied materials, and mechanically applied plating. It does not include soft or liquid lubricants that are readily displaced in assembly.

7.1.1 Coated UN and UNR Threads. This Standard specifies limits of size that pertain whether threads are coated or uncoated. Only in Class 2A external threads is the allowance available to accommodate coatings. Thus, in all classes of internal threads and in Class 3A external threads, limits of size must be adjusted before plating to provide suitable provision for the desired coating.

7.1.2 Coated UNJ Threads. The general rules for calculation of coating allowance are defined in [paras. 7.7](#) through [7.9](#). Restrictions in [paras. 7.1.2.1](#) through [7.1.2.3](#) also apply.

7.1.2.1 Coated UNJ External Threads — Class 3A. Unless otherwise specified, coated or plated external threads with a pitch diameter tolerance of 0.0035 in. or less may have the minimum pitch diameter specified in [Table 2A](#) reduced by not more than 0.0010 in. The minimum major and minor diameter limits specified in [Table 2A](#) may be reduced by 2 times the minimum coating or plating thickness. When the pitch diameter tolerance exceeds 0.0035 in., the minimum pitch diameter may be reduced by 0.3 times the pitch diameter tolerance, but this reduction shall not exceed 0.0015 in. The material limits for coated external threads shall be as specified herein. All thread elements shall be within the size limits specified in [Table 2A](#).

7.1.2.2 Coated UNJ External Threads — Class 2A. Unless otherwise specified, the external thread material limits may not be reduced beyond the minimum material limits to accommodate coating. After coating, the threads shall be no larger than Class 3A material limits specified in [Table 2A](#).

7.1.2.3 Coated UNJ Internal Threads — Classes 2B and 3B. Unless otherwise specified for coated or plated internal threads, the maximum values of minor diameter and pitch diameter specified in [Table 2B](#) may be increased by the same amount permitted in [para. 7.1.2.1](#) for external thread decrease. The limits for coated or plated internal threads shall be within the values specified in [Table 2B](#).

7.2 Strength

There is a possibility that coating thickness adjustments will result in a before-plate condition that may significantly affect the strength of externally threaded parts. Limitations on coating thickness or part redesign may be necessary.

7.3 Electrodeposited Coatings

Electroplated coatings may not cover threads uniformly. Deposits build up more on thread crests than on thread flanks and coating thickness is greater on the lead end of a thread than on threads in the center of a part. The guidelines for calculating before-coating thread sizes for uniformly coated threads can be used as a starting place in determining the before-coating thread sizes on a given part, but the exact sizes for any given part may have to be determined by trial and error.

7.4 Other Considerations

It is essential to adequately review all possibilities and consider limitations in the threading and coating production processes before finalizing the coating process and the allowance required to accommodate the coating. A thread with no allowance after coating shall not transgress the basic maximum material limits and is therefore subject to acceptance using a maximum material limit thread gage for Class 3A, Class 1B, Class 2B, or Class 3B.

7.5 Material Limits for Coated Threads

Unless otherwise specified, size limits for standard external thread Class 2A apply prior to coating. The external thread allowance may thus be used to accommodate the coating thickness on coated parts, provided that the maximum coating thickness is no more than one-fourth of the allowance (see [Figures 5, 7, and 10](#)). Thus, the thread after coating is subject to acceptance using a Class 3A maximum material limit and/or size thread gage.

Where UN and UNR external threads have no allowance, or allowance must be maintained after coating, and for standard internal threads, sufficient allowance must be provided prior to coating to ensure that finished product threads do not exceed the maximum material limits specified. For thread Class 3A, Class 2A allowances should be applied whenever possible in accordance with calculations in [section 5](#). For UNJ threads, see [paras. 7.1.2.1 and 7.1.2.2](#).

7.6 Dimensional Effects of Coating

7.6.1 On a cylindrical surface, the effect of coating is to change the diameter by twice the coating thickness (2:1 ratio), one coating thickness on each side of the cylinder.

On a screw thread, this would apply to the major and minor diameters.

7.6.2 Because the coating thickness is measured perpendicular to the coated surface while the pitch diameter is measured perpendicular to the thread axis, the effect of a uniformly coated thread flank on the pitch diameter is a change of 4 times the thickness of coating on the flank (4:1 ratio) (see [Figure 14](#)). The diameters of external threads before coating will be smaller while the diameters of internal threads before coating will be larger than the coated diameters.

7.6.3 On uniformly coated threads, the effect on a thread root radius reduces the radius by the coating thickness (1:1 ratio).

7.6.4 Depending on the type and amount of plating, some coatings and plating do not apply uniformly on threads (see [Figure 15](#)). Different coating materials and processes have different application characteristics. The threaded part's overall length and other configuration characteristics also affect the way the coatings build up on the threads. [Paragraphs 7.7 through 7.9](#) provide general guidelines for calculating precoating thread size to allow for coating buildup while preventing interference in assembly. The exact precoating thread size for a given part with a given type of coating may have to be developed by the producer experimentally.

7.7 External Thread With Allowance Available for Coating

7.7.1 Maximum and Minimum Coating Thickness Specified. The amount of the allowance on the pitch diameter is sufficient if 4 times the maximum coating thickness is equal to or less than the allowance tabulated in [Table 2A](#) or calculated per formula in [para. 5.8.1\(a\)](#).

7.7.2 Only Nominal or Minimum Coating Thickness Specified. If no thickness tolerance is given, it is recommended that a tolerance of +50% of the nominal or minimum thickness be assumed. Then the amount of the allowance on the pitch diameter is sufficient if 6 times the specified coating thickness is equal to or less than the allowance tabulated in [Table 2A](#) or calculated per formula in [para. 5.8.1\(a\)](#).

7.8 External Thread With No Allowance for Coating


7.8.1 Maximum and Minimum Coating Thickness Specified

(a) To determine before-coating product limits, decrease

(1) the maximum major diameter by 2 times the maximum coating thickness

(2) the minimum major diameter by 2 times the minimum coating thickness

Figure 14
Ratio of Pitch Diameter Change to Thickness of Coating on 60-deg Threads

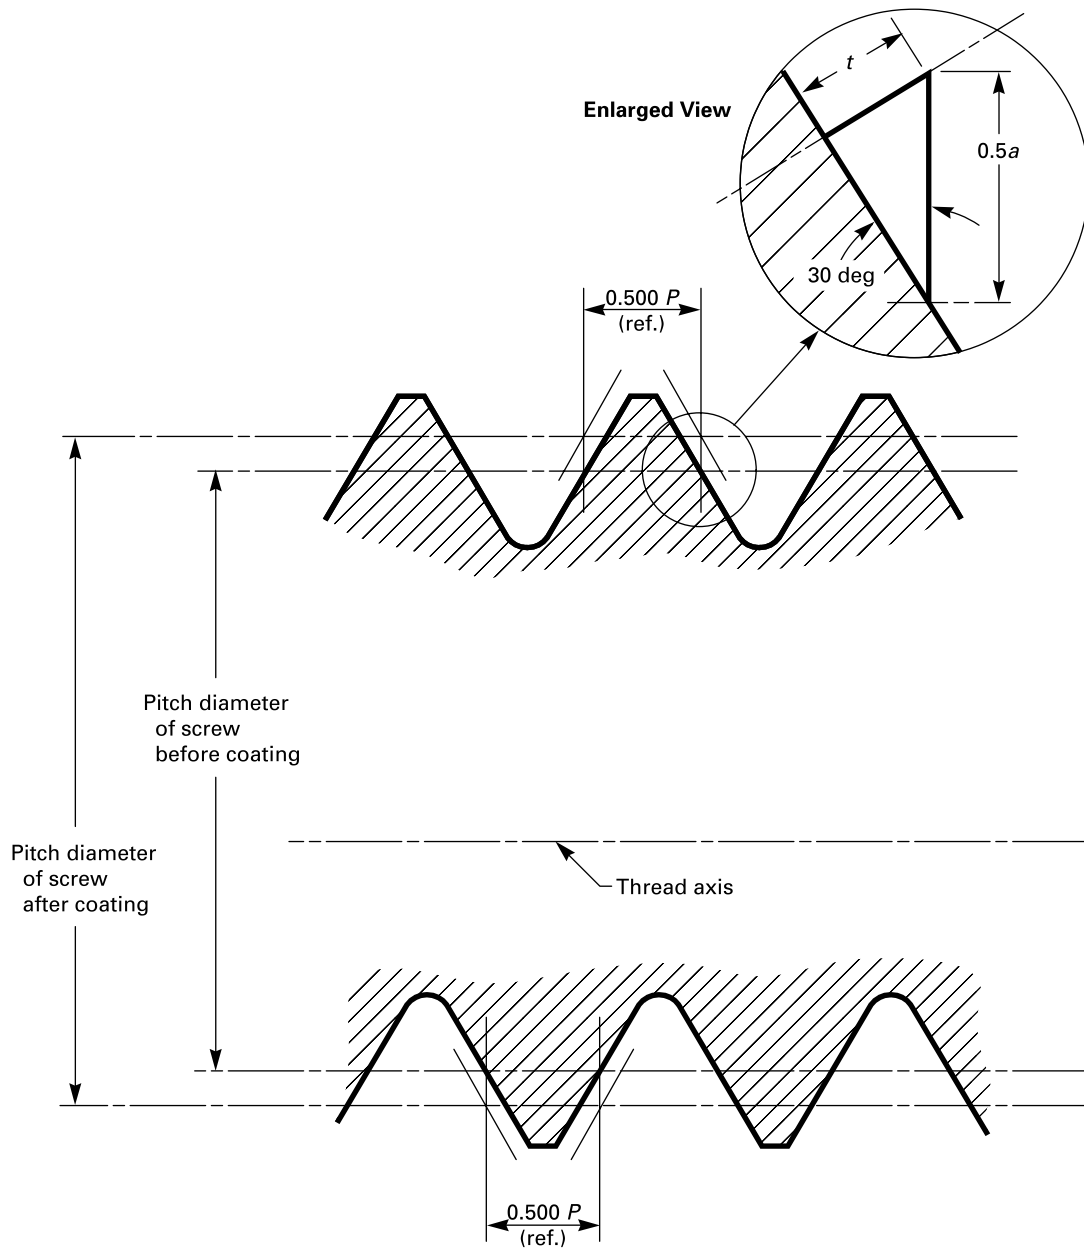

GENERAL NOTE: In the enlarged view,

$$0.25a = t \text{ and } a$$


= $4t$ or the pitch diameter of a 60-deg thread changes 4 times the thickness of coating

a = pitch diameter change due to coating

t = thickness of coating

$$\begin{aligned} \text{Sine } 30 \text{ deg} &= \frac{t}{0.25a} \\ &= 0.5 \end{aligned}$$

Figure 15
Effect of Electrodeposited Coating on 60-deg External Threads

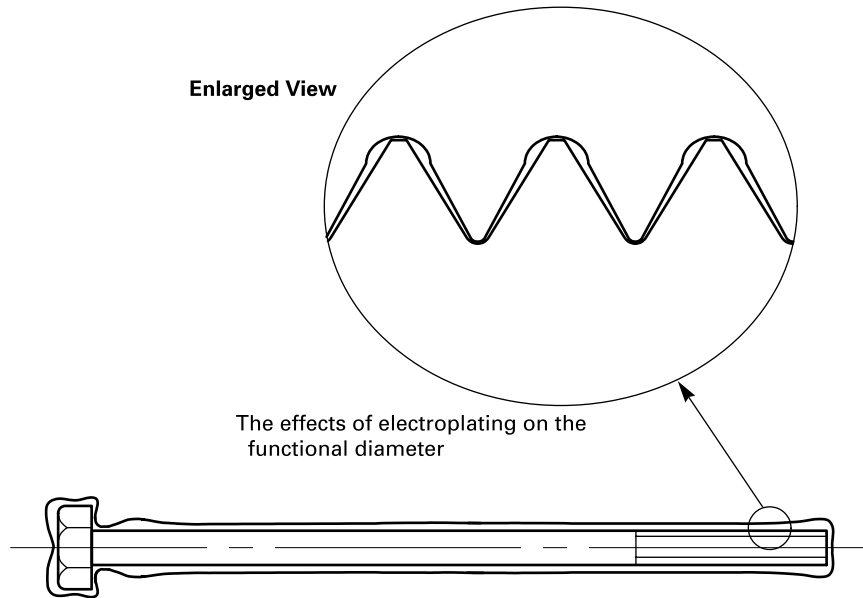

GENERAL NOTE: Electrodeposited coatings build up more heavily at sharp corners, are greater at the extreme ends and edges, and are least in the center and recessed areas.

(3) the maximum pitch diameter by 4 times the maximum coating thickness

(4) the minimum pitch diameter by 4 times the minimum coating thickness

(5) the maximum minor diameter by 2 times the maximum coating thickness

(6) the minimum minor diameter by 2 times the minimum coating thickness

(b) To determine before-coating product limits for root radius, increase

(1) the maximum root radius by the minimum coating thickness

(2) the minimum root radius by the maximum coating thickness

NOTE: (a)(1) through (a)(6) apply to all (UN/UNR/UNJ) threads; (b)(1) and (b)(2) apply only to UNR and UNJ threads.

Following the above rules will generate after-coating product dimensions that fall within the minimum and maximum product limits.

7.8.1.1 EXAMPLE: $\frac{3}{8}$ -16-UNC-2A AFTER COATING
 Coating thickness 0.0002 in. to 0.0003 in.

To determine the before-coating maximum material sizes:

0.3737 after coating maximum major diameter
 – 0.0006 (2×0.0003 maximum coating thickness)
 = 0.3731 before coating maximum major diameter

0.3331 after coating maximum pitch diameter
 – 0.0012 (4×0.0003 maximum coating thickness)
 = 0.3319 before coating maximum pitch diameter

To determine the before-coating minimum material sizes:

0.3643 after coating minimum major diameter
 – 0.0004 (2×0.0002 minimum coating thickness)
 = 0.3639 before coating minimum major diameter

0.3287 after coating minimum pitch diameter
 – 0.0008 (4×0.0002 minimum coating thickness)
 = 0.3279 before coating minimum pitch diameter

The before-coating sizes should be included in the thread designation (see para. 6.2.1).

7.8.1.2 EXAMPLE: $\frac{3}{8}$ -16-UNJC-2A AFTER COATING
 Coating thickness 0.0002 in. to 0.0003 in.

To determine the before-coating maximum material sizes:

0.3737 after coating maximum major diameter
 – 0.0006 (2×0.0003 maximum coating thickness)
 = 0.3731 before coating maximum major diameter

0.3331 after coating maximum pitch diameter
 – 0.0012 (4×0.0003 maximum coating thickness)
 = 0.3319 before coating maximum pitch diameter

0.3015 after coating maximum minor diameter
 – 0.0006 (2×0.0003 maximum coating thickness)
 = 0.3009 before coating maximum minor diameter

0.0113 after coating maximum root radius
 + 0.0002 (1×0.0002 minimum coating thickness)
 = 0.0115 before coating maximum root radius

To determine the before-coating minimum material sizes:

0.3643 after coating minimum major diameter
 – 0.0004 (2×0.0002 minimum coating thickness)
 = 0.3639 before coating minimum major diameter

0.3287 after coating minimum pitch diameter
 – 0.0008 (4×0.0002 minimum coating thickness)
 = 0.3279 before coating minimum pitch diameter

0.2933 after coating minimum minor diameter
 – 0.0004 (2×0.0002 minimum coating thickness)
 = 0.2929 before coating minimum minor diameter

0.0094 after coating minimum root radius
 + 0.0003 (1×0.0003 maximum coating thickness)
 = 0.0097 before coating minimum root radius

The before-coating sizes should be included in the thread designation (see [para. 6.2.1](#)).

7.8.2 Only Nominal or Minimum Coating Thickness Specified. If no coating thickness tolerance is given, it is recommended that a tolerance of +50% of the nominal or minimum thickness be assumed. Then

(a) to determine before-coating product limits for a coated thread, decrease

(1) the maximum major diameter by 3 times the coating thickness

(2) the minimum major diameter by 2 times the coating thickness

(3) the maximum pitch diameter by 6 times the coating thickness

(4) the minimum pitch diameter by 4 times the coating thickness

(5) the maximum minor diameter by 3 times the coating thickness

(6) the minimum minor diameter by 2 times the coating thickness

(b) to determine before-coating product limits for root radius increase

(1) the maximum root radius by the coating thickness

(2) the minimum root radius by 1.5 times the coating thickness

NOTE: (a)(1) through (a)(6) apply to all (UN/UNR/UNJ) threads; (b)(1) and (b)(2) apply only to UNR and UNJ threads.

Following the above rules will generate after-coating product dimensions that fall within the minimum and maximum product limits.

7.8.2.1 EXAMPLE: $\frac{1}{2}$ -13-UNC-3A Coating thickness: 0.0004 in.

(a) Since the allowance for Class 2A thread is 0.0015 in., the nominal or minimum coating thickness that may be applied is equal to 0.0015 in. divided by 6, or 0.00025 in. (the maximum thickness of coating that may be applied is equal to 0.0015 divided by 4 or 0.00038 in.). This is not sufficient for the required nominal or minimum coating of 0.0004 in. specified, so additional adjustments to the before-coating pitch and major diameters must be made.

(b) To determine the before-coating maximum material sizes:

0.5000 after coating maximum major diameter
 – 0.0012 (3×0.0004 coating thickness)
 = 0.4988 before coating maximum major diameter

0.4500 after coating maximum pitch diameter
 – 0.0024 (6×0.0004 coating thickness)
 = 0.4476 before coating maximum pitch diameter

(c) To determine the before-coating minimum material sizes:

0.4891 after coating minimum major diameter
 – 0.0008 (2×0.0004 coating thickness)
 = 0.4883 before coating minimum major diameter

0.4463 after coating minimum pitch diameter
 – 0.0016 (4×0.0004 coating thickness)
 = 0.4447 before coating minimum pitch diameter

The before-coating sizes should be included in the thread designation (see [para. 6.2.1](#)).

7.8.2.2 EXAMPLE: $\frac{1}{2}$ -13-UNJC-3A Coating Thickness 0.0002 in.

To determine the before-coating maximum material sizes:

0.5000 after coating maximum major diameter
 – 0.0006 (3×0.0002 coating thickness)
 = 0.4994 before coating maximum major diameter

0.4500 after coating maximum pitch diameter
 – 0.0012 (6×0.0002 coating thickness)
 = 0.4488 before coating maximum pitch diameter

0.4111 after coating maximum minor diameter
 – 0.0006 (3×0.0002 coating thickness)
 = 0.4105 before coating maximum minor diameter

0.0139 after coating maximum root radius
 + 0.0002 (1×0.0002 coating thickness)
 = 0.0141 before coating maximum root radius

To determine the before-coating minimum material sizes:

$$\begin{aligned} &0.4891 \text{ after coating minimum major diameter} \\ &- 0.0004 (2 \times 0.0002 \text{ coating thickness}) \\ &= 0.4887 \text{ before coating minimum major diameter} \end{aligned}$$

$$\begin{aligned} &0.4463 \text{ after coating minimum pitch diameter} \\ &- 0.0008 (4 \times 0.0002 \text{ coating thickness}) \\ &= 0.4455 \text{ before coating minimum pitch diameter} \end{aligned}$$

$$\begin{aligned} &0.4028 \text{ after coating minimum minor diameter} \\ &- 0.0004 (2 \times 0.0002 \text{ coating thickness}) \\ &= 0.4024 \text{ before coating minimum minor diameter} \end{aligned}$$

$$\begin{aligned} &0.0115 \text{ after coating minimum root radius} \\ &+ 0.0003 (1.5 \times 0.0002 \text{ coating thickness}) \\ &= 0.0118 \text{ before coating minimum root radius} \end{aligned}$$

The before-coating sizes should be included in the thread designation (see [para. 6.2.1](#)).

7.8.3 Adjusted Size Limits. It should be noted in the preceding examples that the before-coating material limit tolerances are less than the tolerances after coating. This is because the coating tolerance consumes some of the product tolerance. In some instances, there may be insufficient pitch diameter tolerance available for manufacturing in the before-coating condition and additional adjustments and controls will be necessary and shall be agreed upon between supplier and purchaser.

7.9 Internal Threads

Standard internal threads provide no allowance for coating thickness like external threads in [para 7.7](#).

7.9.1 Maximum and Minimum Coating Thicknesses Specified. To determine before-coating product limits for a coated thread, increase

(a) the minimum major diameter by 2 times the maximum coating thickness

(b) the minimum pitch diameter by 4 times the maximum coating thickness

(c) the maximum pitch diameter by 4 times the minimum coating thickness

(d) the minimum minor diameter by 2 times the maximum coating thickness

(e) the maximum minor diameter by 2 times the minimum coating thickness

7.9.1.1 EXAMPLE: $\frac{3}{8}$ -16 UNC-2B AFTER COATING
Coating thickness: 0.0002 in. to 0.0003 in.

To determine the before-coating maximum material sizes:

$$\begin{aligned} &0.3750 \text{ after coating minimum major diameter} \\ &+ 0.0006 (2 \times 0.0003 \text{ maximum coating thickness}) \\ &= 0.3756 \text{ before coating minimum major diameter} \end{aligned}$$

$$\begin{aligned} &0.3344 \text{ after coating minimum pitch diameter} \\ &+ 0.0012 (4 \times 0.0003 \text{ maximum coating thickness}) \\ &= 0.3356 \text{ before coating minimum pitch diameter} \end{aligned}$$

$$\begin{aligned} &0.3070 \text{ after coating minimum minor diameter} \\ &+ 0.0006 (2 \times 0.0003 \text{ maximum coating thickness}) \\ &= 0.3076 \text{ before coating minimum minor diameter} \end{aligned}$$

To determine the before-coating maximum material sizes:

$$\begin{aligned} &0.3401 \text{ after coating maximum pitch diameter} \\ &+ 0.0008 (4 \times 0.0002 \text{ minimum coating thickness}) \\ &= 0.3409 \text{ before coating maximum pitch diameter} \end{aligned}$$

$$\begin{aligned} &0.3210 \text{ after coating maximum minor diameter} \\ &+ 0.0004 (2 \times 0.0002 \text{ minimum coating thickness}) \\ &= 0.3214 \text{ before coating maximum minor diameter} \end{aligned}$$

The before-coating sizes should be included in the thread designation (see [para. 6.2.1](#)).

7.9.2 Only Nominal or Minimum Coating Thickness Specified. If no coating thickness tolerance is given, it is recommended that a tolerance of +50% of the nominal or minimum thickness be assumed. Then, to determine before-coating product limits for a coated thread, increase

(a) the minimum major diameter by 3 times the minimum or nominal coating thickness

(b) the minimum pitch diameter by 6 times the minimum or nominal coating thickness

(c) the maximum pitch diameter by 4 times the minimum or nominal coating thickness

(d) the minimum minor diameter by 3 times the minimum or nominal coating thickness

(e) the maximum minor diameter by 2 times the minimum or nominal coating thickness

7.9.2.1 Example: $\frac{1}{2}$ -13-UNJC-3B

Coating thickness: 0.0002 in.

To determine the before-coating maximum material sizes:

$$\begin{aligned} &0.5000 \text{ after coating minimum major diameter} \\ &+ 0.0006 (3 \times 0.0002 \text{ coating thickness}) \\ &= 0.5006 \text{ before coating minimum major diameter} \end{aligned}$$

$$\begin{aligned} &0.4500 \text{ after coating minimum pitch diameter} \\ &+ 0.0012 (6 \times 0.0002 \text{ coating thickness}) \\ &= 0.4512 \text{ before coating minimum pitch diameter} \end{aligned}$$

$$\begin{aligned} &0.4251 \text{ after coating minimum minor diameter} \\ &+ 0.0006 (3 \times 0.0002 \text{ coating thickness}) \\ &= 0.4257 \text{ before coating minimum minor diameter} \end{aligned}$$

To determine the before-coating minimum material sizes:

$$\begin{aligned} &0.4548 \text{ after coating maximum pitch diameter} \\ &+ 0.0008 (4 \times 0.0002 \text{ coating thickness}) \\ &= 0.4556 \text{ before coating maximum pitch diameter} \end{aligned}$$

$$\begin{aligned} &0.4368 \text{ after coating maximum minor diameter} \\ &+ 0.0004 (2 \times 0.0002 \text{ coating thickness}) \\ &= 0.4372 \text{ before coating maximum minor diameter} \end{aligned}$$

The before-coating sizes should be included in the thread designation (see [para. 6.2.1](#)).

8 LIMITS OF SIZE FOR STANDARD (UN, UNR, AND UNJ) AND SPECIAL (UNS, UNRS, AND UNJS) SERIES OF THREADS

8.1 Standard Series

The standard series for unified inch screw threads is listed in [Table 1](#). Although the designations shown are for the UN thread form, UNR and UNJ designations may be used in all cases.

8.2 Limits of Size

The limits of size are defined by the design profile at its maximum material condition and the minimum profile at the minimum material condition. The limits are specified as diameters (major diameter, minor diameter, pitch diameter), and the practical interpretation of these limits on a three-dimensional threaded product depends on the method of inspection or evaluation or both. These dimensions serve as a basis for measurement and gaging of the thread, but the methods, techniques, and equipment used for thread evaluation establish the degree of thread conformance to the tabulated dimensions. Current techniques for measuring and gaging do not necessarily verify exact conformance of a thread to its specified maximum and minimum envelope. See ASME B1.3 for gaging systems for dimensional acceptability.

8.2.1 Limits of size for the majority of the standard series are shown in [Tables 2A, 2B](#), and [E-1](#). Until this Standard is revised to require the calculated and rounded values per ASME B1.30 shown in [Tables 2A](#) and [2B](#), both these and the values in [Table E-1](#) will be equally acceptable. It is recommended that all users prepare for the eventual adoption of only the values in [Tables 2A](#) and [2B](#).

8.2.2 Limits of size not given may be calculated from the formulas given in [paras. 8.3](#) through [8.3.2](#). Formulas and symbols for thread form are given in [section 10](#).



8.3 Formulas for Limits of Size

The formulas in these paragraphs were used to calculate the values shown in [Tables 2A](#) and [2B](#) for standard series. The following symbols and nomenclature are used in the equations (see [Figures 2, 3](#), and [16](#)):


- D = major diameter, internal
- d = major diameter, external
- D_1 = minor diameter, internal
- d_1 = minor diameter, external
- D_1 bsc = basic minor diameter, internal (see [Tables 6](#) through [16](#))
- $= D - 2h_n$
- D_1 max. = maximum minor diameter, internal
- d_1 max. = maximum minor diameter, external
- D_1 min. = minimum minor diameter, internal
- d_1 min. = minimum minor diameter, external
- D_2 = pitch diameter, internal
- d_2 = pitch diameter, external
- D_2 bsc = basic pitch diameter, internal (see [Tables 6](#) through [16](#))
- $= D - h_b$
- D_2 max. = maximum pitch diameter, internal
- d_2 max. = maximum pitch diameter, external
- D_2 min. = minimum pitch diameter, internal
- d_2 min. = minimum pitch diameter, external
- d_3 max. = maximum minor diameter, external
- d_3 min. = minimum minor diameter, external
- D bsc = basic major (nominal) diameter, internal
- d max. = maximum major diameter, external
- D min. = minimum major diameter, internal
- d min. = minimum major diameter, external
- es = allowance at the major, pitch, and minor diameter of the external thread
- $h_b = 2h_{as}$ (see [Table 5](#))
- h_n = height of internal thread (see [Table 5](#))
- P = pitch, in.
- r max. = maximum root radius, external thread
- r min. = minimum root radius, external thread
- Td = major diameter tolerance, external thread
- TD_1 = minor diameter tolerance, internal thread
- Td_2 = pitch diameter tolerance, external thread

To obtain limits of size using the formulas, see [Table 5](#) for basic thread form data, [section 11](#) for basic dimensions, and [section 5](#) for formulas of allowance and tolerance. For easy reference, outline guides for determining limits of size of external and internal threads are given in [Tables 17A](#) and [17B](#).

Figure 16
Application of General Thread Symbols

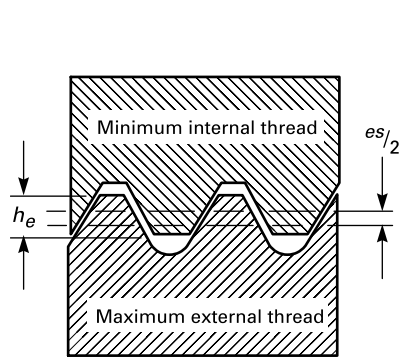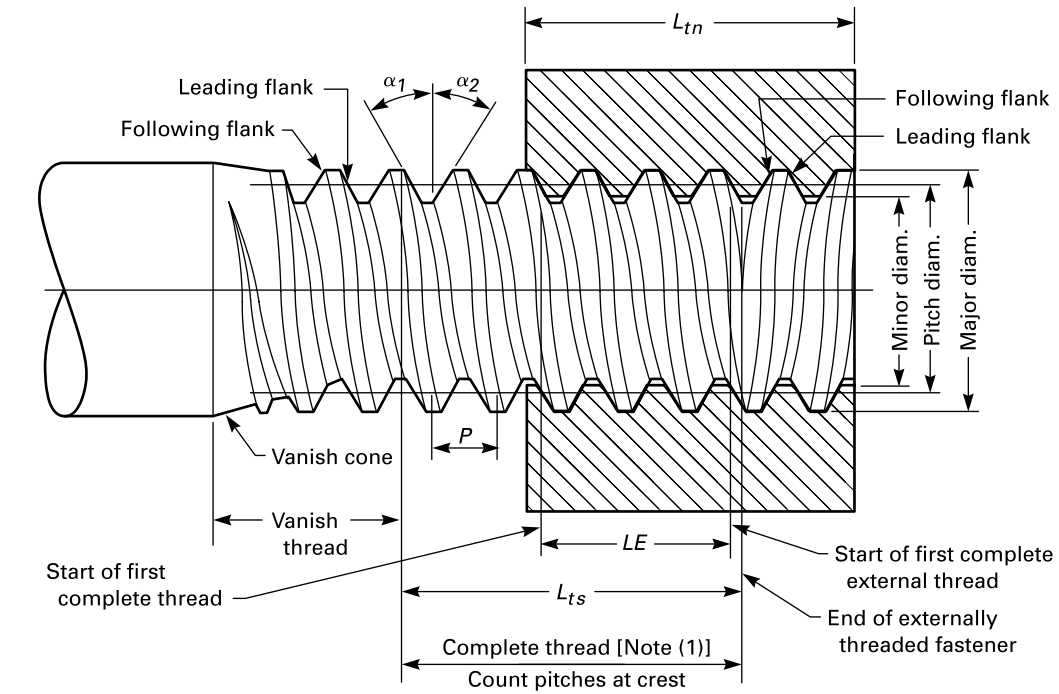


Thread With an Allowance

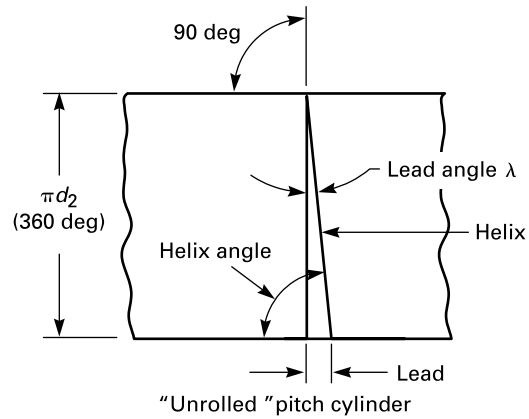


Lead and Helix Angles

Figure 16
Application of General Thread Symbols (Cont'd)

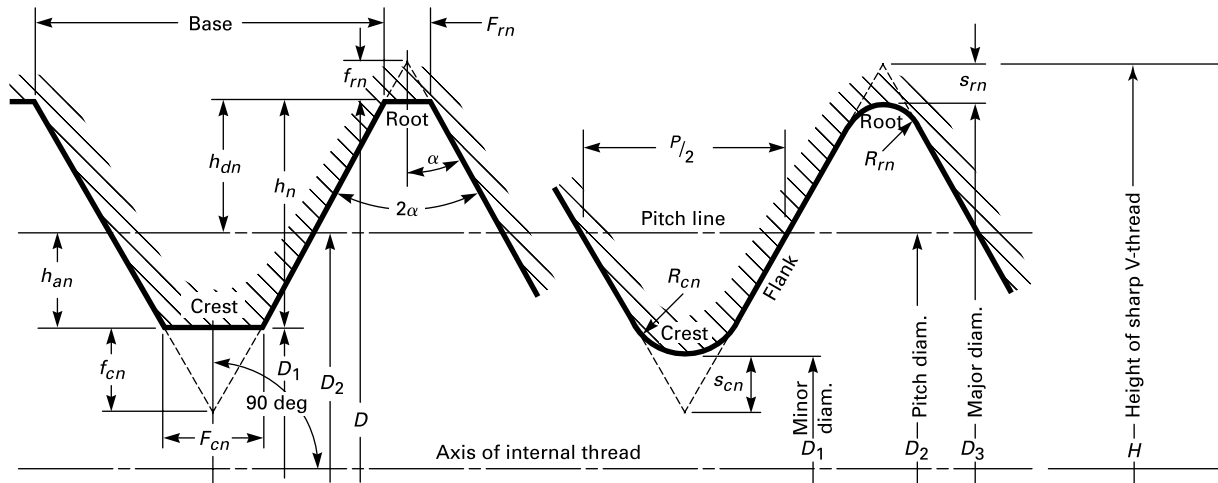

Internal Thread

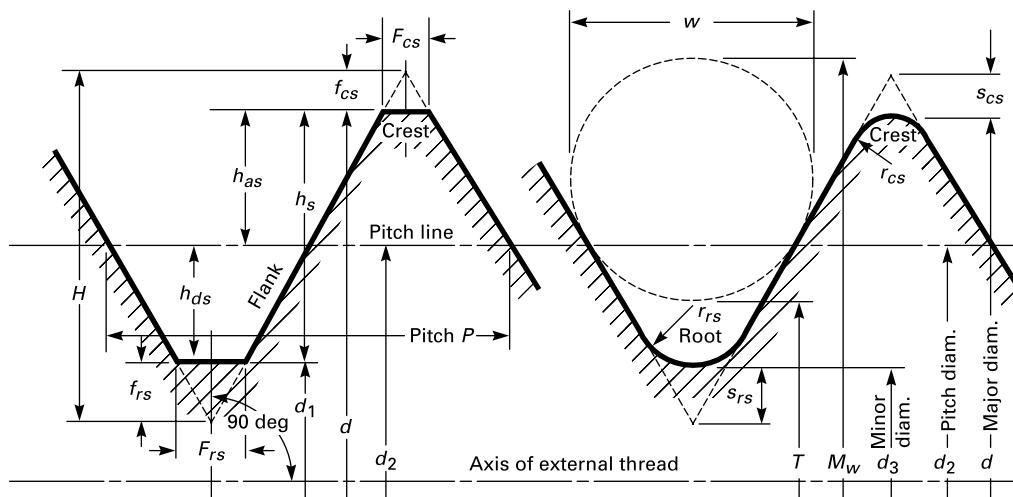

External Thread

GENERAL NOTE: These diagrams are not intended to show standard thread forms, but only to illustrate the application of symbols.

NOTE: (1) Portion of thread fully formed at crest and root.

8.3.1 External Thread

(a) *Maximum Major Diameter (External Threads)*

(1) for Classes 1A and 2A

$$d_{\text{max.}} = D_{\text{bsc}} - e_s$$

(2) for Class 3A

$$d_{\text{max.}} = D_{\text{bsc}}$$

(b) *Minimum Major Diameter (External Threads)*

(1) for all classes

$$d_{\text{min.}} = d_{\text{max.}} - T_d \text{ for respective class of thread}$$

(c) *Maximum Pitch Diameter (External Threads)*

(1) for Classes 1A and 2A

$$d_2 = D_2_{\text{bsc}} - e_s$$

(2) for Class 3A

$$d_2 = D_2_{\text{bsc}}$$

(d) *Minimum Pitch Diameter (External Threads)*

(1) for all classes

$$d_2_{\text{min.}} = d_2_{\text{max.}} - T_{d_2} \text{ for respective class of thread}$$

(e) *Maximum Minor Diameter (External Threads)*

(1) in dimensioning UN series external threads, the minor diameter is not specified. In practice, the minor diameter is satisfactory when accepted by a standard GO thread gage in accordance with ASME B1.2. When minor diameter values for reference purposes are desired, they are calculated as follows:

(-a) for Classes 1A and 2A

$$d_1_{\text{max.}} = D_1_{\text{bsc}} - e_s$$

(-b) for Class 3A

$$d_1_{\text{max.}} = D_1_{\text{bsc}}$$

(2) for UNR series threads, the formulas are

(-a) for Classes 1A and 2A

$$d_3_{\text{max.}} = D_1_{\text{bsc}} - e_s - 0.10825318P$$

(-b) for Class 3A

$$d_3_{\text{max.}} = D_1_{\text{bsc}} - 0.10825318P$$

(3) for UNJ series threads, the formulas are

(-a) for Class 2A

$$d_3_{\text{max.}} = d_2_{\text{max.}}(\text{for Class 2A UN}) - 0.5051800P$$

(see Table 5)

(-b) for Class 3A

$$d_3_{\text{max.}} = d_2_{\text{max.}}(\text{for Class 3A UN}) - 0.5051800P$$

(see Table 5)

(-c) $r_{\text{max.}} = 0.18042196P$

(f) *Minimum Minor Diameter (External Threads)*

(1) for UN and UNR series threads, when the minimum diameter is desirable for design purposes, it can be calculated for all classes by

$$d_1_{\text{min.}} = d_2_{\text{min.}} - 0.64951905P$$

(2) for UNJ series threads, the formulas are

(-a) for Class 2A

$$d_3_{\text{min.}} = d_2_{\text{min.}}(\text{for Class 2A UN}) - 0.565800P$$

(see Table 5)

(-b) for Class 3A

$$d_3_{\text{min.}} = d_2_{\text{min.}}(\text{for Class 3A UN}) - 0.565800P$$

(see Table 5)

(-c) $r_{\text{min.}} = 0.15011107P$

8.3.2 Internal Thread

(a) *Maximum Major Diameter (Internal Threads)*. In dimensioning internal threads, the maximum major diameter is established by the crest of an unworn tool and therefore is not specified. In practice, the major diameter of an internal thread is satisfactory when accepted by a gage or gaging method that represents the maximum material condition of an external thread that has no allowance.

(b) *Minimum Major Diameter (Internal Threads)*

(1) For all classes

$$D_{\text{min.}} = D_{\text{bsc}}$$

(c) *Minimum Pitch Diameter (Internal Threads)*

(1) For all classes

$$D_2_{\text{min.}} = D_2_{\text{bsc}}$$

(d) *Maximum Pitch Diameter (Internal Threads)*

(1) For all classes

$$D_2_{\text{max.}} = D_2_{\text{min.}} + TD_2 \text{ for respective class of thread}$$

(e) *Minimum Minor Diameter (Internal Threads)*

(1) for UN and UNR series threads, for all classes

$$D_1_{\text{min.}} = D_{\text{bsc}} - 2h_n \text{ or } D_{\text{bsc}} - 1.08253175P$$

rounded as follows:

(-a) for all classes, less than 0.1380 (#6) nominal size, round to four decimal places

(-b) for Classes 1B and 2B, equal to or greater than 0.1380 (#6) nominal size, round to three decimal places

(-c) for Class 3B, equal to or greater than 0.1380 (#6) nominal size, round to three decimal places and add a zero to yield a four-decimal-place value

(2) for UNJ series threads, for all classes

$$D_1 \text{ min.} = D \text{ min.} - 0.97427858P$$

rounded as follows:

(-a) for all classes, less than 0.1380 (#6) nominal size, round to four decimal places

(-b) for Class 2B, equal to or greater than 0.1380 (#6) nominal size, round to three decimal places

(-c) for Class 3B, equal to or greater than 0.1380 (#6) nominal size, round to four decimal places

(f) *Maximum Minor Diameter (Internal Threads)*

(1) For all classes

$$D_1 \text{ max.} = D_1 \text{ min. (six decimal-place value} + TD_1$$

[see para. 5.8.2(c)], rounded as follows:

(-a) for Classes 1B and 2B, less than 0.1380 (#6) nominal size, round to four decimal places

(-b) for Classes 1B and 2B, equal to or greater than 0.1380 (#6) nominal size, round to three decimal places

(-c) for Class 3B, all sizes, round to four decimal places

8.4 Example of Calculations From Formulas

Tables 18A through 18D are based on the practices for calculating and rounding screw thread dimensions as specified in ASME B1.30; see ASME B1.30 for additional examples.

9 THREAD FORM TOLERANCES

9.1 Form Variation

Form variation is the combined effect on functional size of individual thread form variations in lead (pitch), helix, flank angle, taper, and roundness.

9.2 Lead and Flank Angle Acceptance

Acceptance of lead and flank angles of product screw threads shall be in accordance with paras 9.2.1 through 9.2.6. These factors also contribute to visual identification of gross defects in thread profile.

9.2.1 When Thread Gaging System 21 of ASME B1.3 is specified, product thread lead (including helix) and flank angle variations are not considered as separate elements.

9.2.2 When Thread Gaging System 22 of ASME B1.3 is specified, with the pitch diameter or thread-groove diameter inspection or evaluation required, the product thread lead (including helix) and flank angles shall be considered acceptable when the minimum material characteristic (pitch diameter or thread-groove diameter in ASME B1.3, Tables 1 and 2, columns C and D) and the maximum material characteristic (GO in ASME B1.3, Tables 1 and 2, column A) are accepted by the gages specified for System 22, over the standard GO thread gage length.

When Thread Gaging System 22 is specified with NO GO functional diameter combined with inspection or evaluation of lead and flank option, agreements must be reached between the purchaser and the supplier on lead and flank angle limits and method of evaluation.

9.2.3 When Thread Gaging System 23 of ASME B1.3 is specified, product thread lead and flank angles shall be acceptable if within the allowable variations specified in Tables 3 and 19. Also, the minimum material characteristic (pitch diameter or thread-groove diameter in ASME B1.3, Tables 1 and 2, columns C and D) and the maximum material characteristic (GO in ASME B1.3, Tables 1 and 2, column A) must be accepted by the gages specified for System 23 over the standard GO thread gage length.

Allowable variations in lead and flank angles are maximum values. Maximum variation in these and pitch diameter tolerance cannot be taken simultaneously (see paras. 9.2.5 and 9.2.6).

9.2.4 When individual inspection or evaluation of lead (including helix) or flank angle or both variations are required in addition to Thread Gaging System 21 or 22 of ASME B1.3, the allowable variations for these characteristics shall be as specified in Tables 3 and 19.

9.2.5 For sizes not included in Tables 3 and 19, the allowable lead variation is equal to one-half the pitch diameter tolerance divided by 1.732051. This is the lead variation that causes a change in functional diameter equal to one half the pitch diameter tolerance, external thread, Td_2 . The allowable flank half-angle variation in minutes of arc is equal to 30 plus 1.875 times the number of threads per inch, rounded to the nearest 5 min for UN threads and UNJ threads 32 threads/in. and coarser. For UNJ threads finer than 32 threads/in., this is equal to 62 plus 0.775 times the number of threads/in. rounded to the nearest 5 min.

(a) EXAMPLE: 0.945-8.5-UNJS or UNS-3A; lead and angle control required

No lead and angle tolerances were specified nor do default values appear in Tables 6 and 7. Values are calculated as follows:

$$\text{Lead tolerance} = (0.5Td_2)/1.732051$$

$$Td_2 = 0.0050$$

$$\text{Lead tolerance} = (0.5 \times 0.0050)/1.732051 = 0.0014 \text{ in.}$$

Angle tolerance (for 32 TPI and coarser) = $30 + (1.875 \times \text{TPI})$

$$\begin{aligned}\text{Angle tolerance} &= 30 + (1.875 \times 8.5) \\ &= 45.94 \text{ min} \\ &= 45 \text{ min when rounded to nearest 5 min}\end{aligned}$$

(b) EXAMPLE: 0.500-41-UNJS-3B; lead and angle control required

$$\begin{aligned}\text{Lead tolerance} &= (0.5Td_2)/1.732051 \\ \text{Pitch diameter tolerance, } Td_2 &= 0.0031 \\ \text{Lead tolerance} &= (0.5 \times 0.0031)/1.732051 = 0.0009 \text{ in.} \\ \text{Angle tolerance (for finer than 32 TPI)} &= 62 + (0.775 \times \text{TPI}) \\ \text{Angle tolerance} &= 62 + (0.775 \times 41) \\ &= 93.78 \text{ min} \\ &= 1 \text{ deg and 35 min when rounded to nearest 5 min}\end{aligned}$$

(c) For UNJ, if lead and angle tolerances are specified as a pitch diameter equivalent in terms of pitch diameter tolerance, tolerances in accordance with [para. 9.2.3](#) or [para. 9.2.4](#) may be adjusted proportionately using 0.5 times pitch diameter tolerance as a basis.

(1) EXAMPLE: 0.5000-20-UNJF-3A (22S); lead and angle control required – 0.4 PD tolerance

From [Table 3](#), allowable lead variation is 0.0009 in. This would be adjusted to 0.4/0.5 times 0.0009, which is 0.0007 in.

From [Table 19](#), allowable angle variation is 1 deg 10 min or 70 min. This would be adjusted to 0.4/0.5 times 70, which is 56 min, or 55 min when rounded.

9.2.6 For the requirements of [paras. 9.2.4](#) and [9.2.5](#), lead variation values tabulated or calculated are the maximum variations from specified lead between any two points not farther apart than the length of the standard GO thread gage. Flank angle variation values are maximum variations from the basic 30-deg angle between thread flanks and perpendicular to the thread axis.

10 FORMULAS AND NOMENCLATURE FOR THREAD FORM

Formulas are given below; data are tabulated in [Table 5](#).

The nomenclature is defined in [Table 20](#) and application of the symbols is shown in [Figure 16](#). Formulas that are a function of H are for reference only.

(a) Included angle of thread

$$2\alpha = 60 \text{ deg}$$

(b) Half angle of thread

$$\alpha = 30 \text{ deg}$$

(c) Threads per inch (TPI), the number of thread pitches per inch. TPI is the reciprocal of the pitch value in inches ($1/P$)

(d) Pitch of thread

$$P = 1/\text{TPI}$$

(see [Table 5](#), column 2)

(e) Height of sharp V thread (fundamental triangle)

$$H = 0.86602540P$$

(see [Table 5](#), column 24)

(f) Height of UNR external thread, design form

$$h_s \text{ (for UNR)} = 0.61343466P$$

(see [Table 5](#), column 21)

(g) Height of internal thread and UN external thread

$$h_s \text{ (for UN)} = h_n = 0.54126588P$$

(see [Table 5](#), column 18)

(h) Height of thread engagement

$$h_s \text{ (for UN)} = 0.54126588P$$

(see [Table 5](#), column 18)

(i) Flat at crest of external thread

$$F_{cs} = 0.12500P$$

(see [Table 5](#), column 4)

(j) Truncation of UN external thread crest

$$f_{cs} = 0.10825318P$$

(see [Table 5](#), column 3)

(k) Truncation of UNR external thread (for calculating minor diameter values in tables)

$$S_{rs} = 0.16237976P$$

(see [Table 5](#), column 7)

(l) Basic flat at crest of internal thread and root of external thread

$$F_{rs} = F_{cn} = 0.2500P$$

(see [Table 5](#), column 10)

(m) Truncation of internal thread crest

$$f_{cn} = 0.21650635P$$

(see [Table 5](#), column 9)

(n) Flat at root of internal thread

$$F_{rn} = 0.12500P$$

(see [Table 5](#), column 4)

(o) Truncation of internal thread root

$$f_{rn} = 0.10825318P$$

(see [Table 5](#), column 3)

(p) Addendum of external thread

$$h_{as} = 0.32475953P$$

(see Table 5, column 13)

(*q*) Major diameter of external thread

$$d = D - e_s$$

(*r*) Pitch diameter of external thread

$$d_2 = d - 2h_b = d - 0.64951905P$$

(see Table 5, column 22)

(*s*) Minor diameter of UNR external thread

$$d_3 = d - 2h_s = d - 1.22686932P$$

(see Table 5, column 27)

(*t*) Minor diameter of UN external thread

$$d_1 = d - 2h_n = d - 1.08253175P$$

(see Table 5, column 26)

(*u*) Major diameter of internal thread is D

$$D = D_{\text{bsc}}$$

(*v*) Pitch diameter of internal thread is D_2

$$D_2 = D - h_b = D - 0.64951905P$$

(see Table 5, column 22)

(*w*) Minor diameter of internal thread D_1

$$D_1 = D - 2h_n = D - 1.08253175P$$

(see Table 5, column 26)

11 TABLES OF BASIC DIMENSIONS

11.1 Table Content

The basic dimensions tabulated in Tables 6 through 16 include major diameter, pitch diameter, minor diameter of external threads, minor diameter of internal threads, lead angle, cross-sectional area at the minor diameter, and the tensile stress area.

11.2 Thread Series

Basic dimensions are given for each of the standard series threads.

Table 6
Basic Dimensions for Coarse-Thread Series (UNC, UNRC, and UNJC)

Nominal Size		Basic Major Diam., <i>D</i> bsc	Threads/ in.	Basic Pitch Diam., <i>D</i> ₂ bsc	UNR Design	UNJ Design	Basic UN Minor Diam. Internal, <i>D</i> ₁ bsc	Basic UNJ	Lead Angle		Area at Minor Diam., in. ² [Notes (1)–(4)]	UN/UNR Tensile Stress Area, in. ² [Notes (1), (4), (5)]
Primary	Secondary				Minor Diam. External, <i>d</i> ₃ (Ref.)	Minor Diam. External, <i>d</i> ₃ (Ref.)		Minor Diam. Internal, <i>D</i> ₁ min. = <i>D</i> ₁ bsc	at Basic Pitch Diam., λ	deg		
...	1	0.0730	64	0.0629	0.0544	0.0550	0.0561	0.0578	4	32	0.00218	0.00263
2	...	0.0860	56	0.0744	0.0647	0.0654	0.0667	0.0686	4	23	0.00310	0.00370
...	3	0.0990	48	0.0855	0.0742	0.0750	0.0764	0.0787	4	27	0.00406	0.00487
4	...	0.1120	40	0.0958	0.0822	0.0832	0.0849	0.0876	4	46	0.00497	0.00604
5	...	0.1250	40	0.1088	0.0952	0.0962	0.0979	0.1006	4	11	0.00672	0.00796
6	...	0.1380	32	0.1177	0.1008	0.1019	0.1042	0.1076	4	51	0.00745	0.00908
8	...	0.1640	32	0.1437	0.1268	0.1279	0.1302	0.1336	3	58	0.01200	0.01400
10	...	0.1900	24	0.1629	0.1404	0.1419	0.1449	0.1494	4	40	0.01450	0.01750
...	12	0.2160	24	0.1889	0.1664	0.1679	0.1709	0.1754	4	1	0.02060	0.02420
1/4	...	0.2500	20	0.2175	0.1905	0.1922	0.1959	0.2013	4	12	0.02690	0.03180
5/16	...	0.3125	18	0.2764	0.2463	0.2483	0.2524	0.2584	3	40	0.04540	0.05240
3/8	...	0.3750	16	0.3344	0.3006	0.3028	0.3073	0.3141	3	25	0.06780	0.07750
7/16	...	0.4375	14	0.3911	0.3524	0.3550	0.3602	0.3679	3	20	0.09330	0.10630
1/2	...	0.5000	13	0.4500	0.4084	0.4111	0.4167	0.4251	3	7	0.12570	0.14190
9/16	...	0.5625	12	0.5084	0.4633	0.4663	0.4723	0.4813	2	59	0.16200	0.18200
5/8	...	0.6250	11	0.5660	0.5167	0.5201	0.5266	0.5364	2	56	0.20200	0.22600
3/4	...	0.7500	10	0.6850	0.6309	0.6345	0.6417	0.6526	2	40	0.30200	0.33400
7/8	...	0.8750	9	0.8028	0.7427	0.7467	0.7547	0.7667	2	31	0.41900	0.46200
1	...	1.0000	8	0.9188	0.8512	0.8557	0.8647	0.8782	2	29	0.55100	0.60600
1 1/8	...	1.1250	7	1.0322	0.9549	0.9600	0.9704	0.9858	2	31	0.69300	0.76300
1 1/4	...	1.2500	7	1.1572	1.0799	1.0850	1.0954	1.1108	2	15	0.89000	0.96900
1 3/8	...	1.3750	6	1.2667	1.1766	1.1825	1.1946	1.2126	2	24	1.05400	1.15500
1 1/2	...	1.5000	6	1.3917	1.3015	1.3075	1.3196	1.3376	2	11	1.29400	1.40500
1 3/4	...	1.7500	5	1.6201	1.5118	1.5191	1.5335	1.5551	2	15	1.74000	1.90000
2	...	2.0000	4 1/2	1.8557	1.7354	1.7434	1.7594	1.7835	2	11	2.30000	2.50000
2 1/4	...	2.2500	4	2.0876	1.9523	1.9613	1.9794	2.0064	2	11	2.91000	3.16000
2 1/2	...	2.5000	4	2.3376	2.2023	2.2113	2.2294	2.2564	1	57	3.72000	4.00000

Table 6
Basic Dimensions for Coarse-Thread Series (UNC, UNRC, and UNJC) (Cont'd)

				UNR Design	UNJ Design		Basic UNJ	Lead Angle		Area at	UN/UNR	
Nominal Size		Basic Major		Basic Pitch	Minor Diam. External,	Minor Diam. External,	Basic UN Minor Diam. Internal,	Minor Diam. Internal,	at Basic Pitch Diam., λ	Minor Diam., in. ²	Tensile Stress Area, in. ²	
Primary	Secondary	D bsc	Threads/in.	D ₂ bsc	(Ref.)	d ₃ (Ref.)	D ₁ bsc	D ₁ min. = D ₁ bsc	deg	Min.	[Notes (1)–(4)]	[Notes (1), (4), (5)]
2¾	...	2.7500	4	2.5876	2.4523	2.4613	2.4794	2.5064	1	46	4.62000	4.93000
3	...	3.0000	4	2.8376	2.7023	2.7113	2.7294	2.7564	1	36	5.62000	5.97000
3¼	...	3.2500	4	3.0876	2.9523	2.9613	2.9794	3.0064	1	29	6.72000	7.10000
3½	...	3.5000	4	3.3376	3.2023	3.2113	3.2294	3.2564	1	22	7.92000	8.33000
3¾	...	3.7500	4	3.5876	3.4523	3.4613	3.4794	3.5064	1	16	9.21000	9.66000
4	...	4.0000	4	3.8376	3.7023	3.7113	3.7294	3.7564	1	11	10.61000	11.08000

NOTES:

- (1) For information only.
- (2) Minor diameter location for the calculation of area = $D - 2h_b$.
- (3) Area at minor diameter = $\pi\{[(D - 2h_b)/2]^2\}$.
- (4) For tensile stress area for UNJ threads, see applicable fastener standard such as SAE AS7251C, SAE AS7455A, SAE AS7459B, SAE AS7466E, SAE AS7477F, and SAE AS7478D.
- (5) See formulas in [Nonmandatory Appendix B, section B-1](#).

Table 7
Basic Dimensions for Fine-Thread Series (UNF, UNRF, and UNJF)

Nominal Size		Basic Major Diam., <i>D</i> bsc	Threads/ in.	Basic Pitch Diam., <i>D</i> ₂ bsc	UNR Design Minor Diam.	UNJ Design Minor Diam.	Basic UN Minor Diam. Internal, <i>D</i> ₁ bsc	Basic UNJ Minor Diam. Internal, <i>D</i> ₁	Lead Angle at Basic Pitch Diam., λ		Area at Minor Diam., in. ²	UN/UNR Tensile Stress Area, in. ²
					External, <i>d</i> ₃ (Ref.)	External, <i>d</i> ₃ (Ref.)		min. = <i>D</i> ₁ bsc	<i>D</i> ₁ bsc	deg	Min.	[Notes (1)–(4)]
Primary	Secondary											
0	...	0.0600	80	0.0519	0.0451	0.0456	0.0465	0.0478	4	24	0.00150	0.00180
...	1	0.0730	72	0.0640	0.0565	0.0570	0.0580	0.0595	3	57	0.00237	0.00278
2	...	0.0860	64	0.0759	0.0674	0.0680	0.0691	0.0708	3	45	0.00339	0.00394
...	3	0.0990	56	0.0874	0.0777	0.0784	0.0797	0.0816	3	44	0.00451	0.00523
4	...	0.1120	48	0.0985	0.0872	0.0880	0.0894	0.0917	3	51	0.00567	0.00661
5	...	0.1250	44	0.1102	0.0979	0.0987	0.1004	0.1029	3	46	0.00716	0.00830
6	...	0.1380	40	0.1218	0.1082	0.1092	0.1109	0.1136	3	45	0.00875	0.01015
8	...	0.1640	36	0.1460	0.1309	0.1320	0.1339	0.1369	3	28	0.01285	0.01474
10	...	0.1900	32	0.1697	0.1528	0.1539	0.1562	0.1596	3	22	0.01750	0.02000
...	12	0.2160	28	0.1928	0.1735	0.1748	0.1773	0.1812	3	23	0.02260	0.02580
1/4	...	0.2500	28	0.2268	0.2075	0.2088	0.2113	0.2152	2	52	0.03260	0.03640
5/16	...	0.3125	24	0.2854	0.2629	0.2644	0.2674	0.2719	2	40	0.05240	0.05810
3/8	...	0.3750	24	0.3479	0.3254	0.3269	0.3299	0.3344	2	11	0.08090	0.08780
7/16	...	0.4375	20	0.4050	0.3780	0.3797	0.3834	0.3888	2	15	0.10900	0.11870
1/2	...	0.5000	20	0.4675	0.4405	0.4422	0.4459	0.4513	1	57	0.14860	0.15990
9/16	...	0.5625	18	0.5264	0.4963	0.4983	0.5024	0.5084	1	55	0.18900	0.20300
5/8	...	0.6250	18	0.5889	0.5588	0.5608	0.5649	0.5709	1	43	0.24000	0.25600
3/4	...	0.7500	16	0.7094	0.6756	0.6778	0.6823	0.6891	1	36	0.35100	0.37300
7/8	...	0.8750	14	0.8286	0.7899	0.7925	0.7977	0.8054	1	34	0.48100	0.50900
1	...	1.0000	12	0.9459	0.9008	0.9038	0.9098	0.9188	1	36	0.62500	0.66300
1 1/8	...	1.1250	12	1.0709	1.0258	1.0288	1.0348	1.0438	1	25	0.81200	0.85600
1 1/4	...	1.2500	12	1.1959	1.1508	1.1538	1.1598	1.1688	1	16	1.02400	1.07300
1 3/8	...	1.3750	12	1.3209	1.2758	1.2788	1.2848	1.2938	1	9	1.26000	1.31500
1 1/2	...	1.5000	12	1.4459	1.4008	1.4038	1.4098	1.4188	1	3	1.52100	1.58100

NOTES:

- (1) For information only.
- (2) Minor diameter location for the calculation of area = $D - 2h_b$.
- (3) Area at minor diameter = $\pi\{[(D - 2h_b)/2]^2\}$.
- (4) For tensile stress area for UNJ threads, see applicable fastener standard such as SAE AS7251C, SAE AS7455A, SAE AS7459B, SAE AS7466E, SAE AS7477F, and SAE AS7478D.
- (5) See formulas in [Nonmandatory Appendix B, section B-1](#).

Table 8
Basic Dimensions for Extra-Fine-Thread Series (UNEF, UNREF, and UNJEF)

Nominal Size		Basic Major Diam., D bsc	Threads/ in.	Basic Pitch Diam., D_2 bsc	UNR Design	UNJ Design	Basic UN Minor Diam. Internal, D_1 bsc	Basic UNJ	Lead Angle		Area at Minor Diam., in. ² [Notes (1)–(4)]	UN/UNR Tensile Stress Area, in. ² [Notes (1), (4), (5)]
Primary	Secondary				Minor Diam. External, d_3 (Ref.)	Minor Diam. External, d_3 (Ref.)		Minor Diam. Internal, D_1 min. = D_1 bsc	at Basic Pitch Diam., λ	deg	Min.	
...	12	0.2160	32	0.1957	0.1788	0.1799	0.1822	0.1856	2	55	0.0242	0.0270
$\frac{1}{4}$	...	0.2500	32	0.2297	0.2128	0.2139	0.2162	0.2196	2	29	0.0344	0.0379
$\frac{5}{16}$	...	0.3125	32	0.2922	0.2753	0.2764	0.2787	0.2821	1	57	0.0581	0.0625
$\frac{3}{8}$	...	0.3750	32	0.3547	0.3378	0.3389	0.3412	0.3446	1	36	0.0878	0.0932
$\frac{7}{16}$	...	0.4375	28	0.4143	0.3950	0.3963	0.3988	0.4027	1	34	0.1201	0.1274
$\frac{1}{2}$	...	0.5000	28	0.4768	0.4575	0.4588	0.4613	0.4652	1	22	0.1620	0.1700
$\frac{9}{16}$	...	0.5625	24	0.5354	0.5129	0.5144	0.5174	0.5219	1	25	0.2030	0.2140
$\frac{5}{8}$	...	0.6250	24	0.5979	0.5754	0.5769	0.5799	0.5844	1	16	0.2560	0.2680
...	$\frac{11}{16}$	0.6875	24	0.6604	0.6379	0.6394	0.6424	0.6469	1	9	0.3150	0.3290
$\frac{3}{4}$	...	0.7500	20	0.7175	0.6905	0.6922	0.6959	0.7013	1	16	0.3690	0.3860
...	$\frac{13}{16}$	0.8125	20	0.7800	0.7530	0.7547	0.7584	0.7638	1	10	0.4390	0.4580
$\frac{7}{8}$	...	0.8750	20	0.8425	0.8155	0.8172	0.8209	0.8263	1	5	0.5150	0.5360
...	$\frac{15}{16}$	0.9375	20	0.9050	0.8780	0.8797	0.8834	0.8888	1	0	0.5980	0.6200
1	...	1.0000	20	0.9675	0.9405	0.9422	0.9459	0.9513	0	57	0.6870	0.7110
...	$1\frac{1}{16}$	1.0625	18	1.0264	0.9963	0.9983	1.0024	1.0084	0	59	0.7700	0.7990
$1\frac{1}{8}$	...	1.1250	18	1.0889	1.0588	1.0608	1.0649	1.0709	0	56	0.8710	0.9010
...	$1\frac{3}{16}$	1.1875	18	1.1514	1.1213	1.1233	1.1274	1.1334	0	53	0.9770	1.0090
$1\frac{1}{4}$	...	1.2500	18	1.2139	1.1838	1.1858	1.1899	1.1959	0	50	1.0900	1.1230
...	$1\frac{5}{16}$	1.3125	18	1.2764	1.2463	1.2483	1.2524	1.2584	0	48	1.2080	1.2440
$1\frac{3}{8}$	...	1.3750	18	1.3389	1.3088	1.3108	1.3149	1.3209	0	45	1.3330	1.3700
...	$1\frac{7}{16}$	1.4375	18	1.4014	1.3713	1.3733	1.3774	1.3834	0	43	1.4640	1.5030
$1\frac{1}{2}$	...	1.5000	18	1.4639	1.4338	1.4358	1.4399	1.4459	0	42	1.6000	1.6400
...	$1\frac{9}{16}$	1.5625	18	1.5264	1.4963	1.4983	1.5024	1.5084	0	40	1.7400	1.7900
$1\frac{5}{8}$	...	1.6250	18	1.5889	1.5588	1.5608	1.5649	1.5709	0	38	1.8900	1.9400
...	$1\frac{11}{16}$	1.6875	18	1.6514	1.6213	1.6233	1.6274	1.6334	0	37	2.0500	2.1000

NOTES:

(1) For information only.

(2) Minor diameter location for the calculation of area = $D - 2h_p$.

Table 8
Basic Dimensions for Extra-Fine-Thread Series (UNEF, UNREF, and UNJEF) (Cont'd)

- NOTES: (Cont'd)
- (3) Area at minor diameter = $\pi\{[(D - 2h_b)/2]^2\}$.
 - (4) For tensile stress area for UN] threads, see applicable fastener standard such as SAE AS7251C, SAE AS7455A, SAE AS7459B, SAE AS7466E, SAE AS7477F, and SAE AS7478D.
 - (5) See formulas in [Nonmandatory Appendix B, section B-1](#).

Table 9
Basic Dimensions for 4-Thread Series (UN, UNR, and UNJ)

Nominal Size		Basic Major Diameter, D bsc	Basic Pitch Diameter, D_2 bsc	UNR	UNJ	Basic UN Minor Diameter Internal, D_1 bsc	Basic UNJ Minor Diameter Internal, D_1 min. = D_1 bsc	Lead Angle at Basic Pitch Diameter, λ		Area at Minor Diameter, in. ² [Notes (1)–(4)]	UN/UNR Tensile Stress Area, in. ² [Notes (1), (4), (5)]
Primary	Secondary			Design Minor Diameter External, d_3 (Ref.)	Design Minor Diameter External, d_3 (Ref.)			deg	Min.		
2½ [Note (6)]	...	2.5000	2.3376	2.2023	2.2113	2.2294	2.2564	1	57	3.72	4.00
...	2⅝	2.6250	2.4626	2.3273	2.3363	2.3544	2.3814	1	51	4.16	4.45
2¾ [Note (6)]	...	2.7500	2.5876	2.4523	2.4613	2.4794	2.5064	1	46	4.62	4.93
...	2⅞	2.8750	2.7126	2.5773	2.5863	2.6044	2.6314	1	41	5.11	5.44
3 [Note (6)]	...	3.0000	2.8376	2.7023	2.7113	2.7294	2.7564	1	36	5.62	5.97
...	3⅛	3.1250	2.9626	2.8273	2.8363	2.8544	2.8814	1	32	6.16	6.52
3¼ [Note (6)]	...	3.2500	3.0876	2.9523	2.9613	2.9794	3.0064	1	29	6.72	7.10
...	3⅜	3.3750	3.2126	3.0773	3.0863	3.1044	3.1314	1	25	7.31	7.70
3½ [Note (6)]	...	3.5000	3.3376	3.2023	3.2113	3.2294	3.2564	1	22	7.92	8.33
...	3⅝	3.6250	3.4626	3.3273	3.3363	3.3544	3.3814	1	19	8.55	8.98
3¾ [Note (6)]	...	3.7500	3.5876	3.4523	3.4613	3.4794	3.5064	1	16	9.21	9.66
...	3⅞	3.8750	3.7126	3.5773	3.5863	3.6044	3.6314	1	14	9.90	10.36
4	...	4.0000	3.8376	3.7023	3.7113	3.7294	3.7564	1	11	10.61	11.08
...	4⅛	4.1250	3.9626	3.8273	3.8363	3.8544	3.8814	1	9	11.34	11.83
4¼	...	4.2500	4.0876	3.9523	3.9613	3.9794	4.0064	1	7	12.10	12.61
...	4⅜	4.3750	4.2126	4.0773	4.0863	4.1044	4.1314	1	5	12.88	13.41
4½	...	4.5000	4.3376	4.2023	4.2113	4.2294	4.2564	1	3	13.69	14.23
...	4⅝	4.6250	4.4626	4.3273	4.3363	4.3544	4.3814	1	1	14.52	15.08
4¾	...	4.7500	4.5876	4.4523	4.4613	4.4794	4.5064	0	60	15.38	15.95
...	4⅞	4.8750	4.7126	4.5773	4.5863	4.6044	4.6314	0	58	16.26	16.85
5	...	5.0000	4.8376	4.7023	4.7113	4.7294	4.7564	0	57	17.17	17.77
...	5⅛	5.1250	4.9626	4.8273	4.8363	4.8544	4.8814	0	55	18.10	18.71
5¼	...	5.2500	5.0876	4.9523	4.9613	4.9794	5.0064	0	54	19.05	19.69
...	5⅜	5.3750	5.2126	5.0773	5.0863	5.1044	5.1314	0	52	20.03	20.68
5½	...	5.5000	5.3376	5.2023	5.2113	5.2294	5.2564	0	51	21.04	21.70
...	5⅝	5.6250	5.4626	5.3273	5.3363	5.3544	5.3814	0	50	22.06	22.74
5¾	...	5.7500	5.5876	5.4523	5.4613	5.4794	5.5064	0	49	23.12	23.81

Table 9
Basic Dimensions for 4-Thread Series (UN, UNR, and UNJ) (Cont'd)

Nominal Size		Basic Major Diameter, D bsc	Basic Pitch Diameter, D_2 bsc	UNR Design Minor Diameter External, d_3 (Ref.)	UNJ Design Minor Diameter External, d_3 (Ref.)	Basic UN Minor Diameter Internal, D_1 bsc	Basic UNJ Minor Diameter Internal, D_1 min. = D_1 bsc	Lead Angle at Basic Pitch Diameter, λ		Area at Minor Diameter, in. ² [Notes (1)–(4)]	UN/UNR Tensile Stress Area, in. ² [Notes (1), (4), (5)]
								deg	Min.		
...	5 ⁷ / ₈	5.8750	5.7126	5.5773	5.5863	5.6044	5.6314	0	48	24.19	24.91
6	...	6.0000	5.8376	5.7023	5.7113	5.7294	5.7564	0	47	25.30	26.03

NOTES:

- (1) For information only.
- (2) Minor diameter location for the calculation of area = $D - 2h_b$.
- (3) Area at minor diameter = $\pi\{[(D - 2h_b)/2]^2\}$.
- (4) For tensile stress area for UNJ threads, see applicable fastener standard such as SAE AS7251C, SAE AS7455A, SAE AS7459B, SAE AS7466E, SAE AS7477F, and SAE AS7478D.
- (5) See formulas in [Nonmandatory Appendix B, section B-1](#).
- (6) Standard sizes of the UNC, UNF, or UNEF series.

Table 10
Basic Dimensions for 6-Thread Series (UN, UNR, and UNJ)

Nominal Size		Basic Major Diameter, D bsc	Basic Pitch Diameter, D_2 bsc	UNR	UNJ	Basic UN Minor Diameter Internal, D_1 bsc	Basic UNJ Minor Diameter Internal, D_1 min. = D_1 bsc	Lead Angle at Basic Pitch Diameter, λ		Area at Minor Diameter, in. ² [Notes (1)–(4)]	UN/UNR Tensile Stress Area, in. ² [Notes (1), (4), (5)]
Primary	Secondary			Design Minor Diameter External, d_3 (Ref.)	Design Minor Diameter External, d_3 (Ref.)			deg	Min.		
$1\frac{3}{8}$ [Note (6)]	...	1.3750	1.2667	1.1765	1.1825	1.1946	1.2126	2	24	1.0541	1.1548
...	$1\frac{7}{16}$	1.4375	1.3292	1.2390	1.2450	1.2571	1.2751	2	17	1.1709	1.2769
$1\frac{1}{2}$ [Note (6)]	...	1.5000	1.3917	1.3015	1.3075	1.3196	1.3376	2	11	1.2938	1.4052
...	$1\frac{9}{16}$	1.5625	1.4542	1.3640	1.3700	1.3821	1.4001	2	5	1.4229	1.5395
$1\frac{5}{8}$	...	1.6250	1.5167	1.4265	1.4325	1.4446	1.4626	2	0	1.5581	1.6801
...	$1\frac{11}{16}$	1.6875	1.5792	1.4890	1.4950	1.5071	1.5251	1	55	1.6995	1.8267
$1\frac{3}{4}$	...	1.7500	1.6417	1.5515	1.5575	1.5696	1.5876	1	51	1.8469	1.9795
...	$1\frac{13}{16}$	1.8125	1.7042	1.6140	1.6200	1.6321	1.6501	1	47	2.0006	2.1384
$1\frac{7}{8}$	...	1.8750	1.7667	1.6765	1.6825	1.6946	1.7126	1	43	2.1603	2.3035
...	$1\frac{15}{16}$	1.9375	1.8292	1.7390	1.7450	1.7571	1.7751	1	40	2.3262	2.4747
2	...	2.0000	1.8917	1.8015	1.8075	1.8196	1.8376	1	36	2.4982	2.6520
...	$2\frac{1}{8}$	2.1250	2.0167	1.9265	1.9325	1.9446	1.9626	1	30	2.8607	3.0251
$2\frac{1}{4}$	...	2.2500	2.1417	2.0515	2.0575	2.0696	2.0876	1	25	3.2477	3.4227
...	$2\frac{3}{8}$	2.3750	2.2667	2.1765	2.1825	2.1946	2.2126	1	20	3.6592	3.8449
$2\frac{1}{2}$	...	2.5000	2.3917	2.3015	2.3075	2.3196	2.3376	1	16	4.0953	4.2916
...	$2\frac{5}{8}$	2.6250	2.5167	2.4265	2.4325	2.4446	2.4626	1	12	4.5560	4.7629
$2\frac{3}{4}$	...	2.7500	2.6417	2.5515	2.5575	2.5696	2.5876	1	9	5.0411	5.2587
...	$2\frac{7}{8}$	2.8750	2.7667	2.6765	2.6825	2.6946	2.7126	1	6	5.5509	5.7790
3	...	3.0000	2.8917	2.8015	2.8075	2.8196	2.8376	1	3	6.0851	6.3239
...	$3\frac{1}{8}$	3.1250	3.0167	2.9265	2.9325	2.9446	2.9626	1	0	6.6439	6.8933
$3\frac{1}{4}$	...	3.2500	3.1417	3.0515	3.0575	3.0696	3.0876	0	58	7.2273	7.4873
...	$3\frac{3}{8}$	3.3750	3.2667	3.1765	3.1825	3.1946	3.2126	0	56	7.8352	8.1058
$3\frac{1}{2}$	...	3.5000	3.3917	3.3015	3.3075	3.3196	3.3376	0	54	8.4676	8.7489
...	$3\frac{5}{8}$	3.6250	3.5167	3.4265	3.4325	3.4446	3.4626	0	52	9.1246	9.4165
$3\frac{3}{4}$	...	3.7500	3.6417	3.5515	3.5575	3.5696	3.5876	0	50	9.8061	10.1086
...	$3\frac{7}{8}$	3.8750	3.7667	3.6765	3.6825	3.6946	3.7126	0	48	10.5122	10.8253
4	...	4.0000	3.8917	3.8015	3.8075	3.8196	3.8376	0	47	11.2428	11.5665
...	$4\frac{1}{8}$	4.1250	4.0167	3.9265	3.9325	3.9446	3.9626	0	45	11.9980	12.3323

Table 10
Basic Dimensions for 6-Thread Series (UN, UNR, and UNJ) (Cont'd)

Nominal Size		Basic Major Diameter, D bsc	Basic Pitch Diameter, D_2 bsc	UNR Design Minor Diameter External, d_3 (Ref.)	UNJ Design Minor Diameter External, d_3 (Ref.)	Basic UN Minor Diameter Internal, D_1 bsc	Basic UNJ Minor Diameter Internal, D_1 min. = D_1 bsc	Lead Angle at Basic Pitch Diameter, λ		Area at Minor Diameter, in. ² [Notes (1)–(4)]	UN/UNR Tensile Stress Area, in. ² [Notes (1), (4), (5)]
Primary	Secondary							deg	Min.		
4 ¹ / ₄	...	4.2500	4.1417	4.0515	4.0575	4.0696	4.0876	0	44	12.7777	13.1226
...	4 ³ / ₈	4.3750	4.2667	4.1765	4.1825	4.1946	4.2126	0	43	13.5819	13.9375
4 ¹ / ₂	...	4.5000	4.3917	4.3015	4.3075	4.3196	4.3376	0	42	14.4107	14.7769
...	4 ⁵ / ₈	4.6250	4.5167	4.4265	4.4325	4.4446	4.4626	0	40	15.2641	15.6409
4 ³ / ₄	...	4.7500	4.6417	4.5515	4.5575	4.5696	4.5876	0	39	16.1419	16.5294
...	4 ⁷ / ₈	4.8750	4.7667	4.6765	4.6825	4.6946	4.7126	0	38	17.0444	17.4424
5	...	5.0000	4.8917	4.8015	4.8075	4.8196	4.8376	0	37	17.9713	18.3800
...	5 ¹ / ₈	5.1250	5.0167	4.9265	4.9325	4.9446	4.9626	0	36	18.9228	19.3421
5 ¹ / ₄	...	5.2500	5.1417	5.0515	5.0575	5.0696	5.0876	0	35	19.8989	20.3288
...	5 ³ / ₈	5.3750	5.2667	5.1765	5.1825	5.1946	5.2126	0	35	20.8995	21.3400
5 ¹ / ₂	...	5.5000	5.3917	5.3015	5.3075	5.3196	5.3376	0	34	21.9246	22.3758
...	5 ⁵ / ₈	5.6250	5.5167	5.4265	5.4325	5.4446	5.4626	0	33	22.9743	23.4361
5 ³ / ₄	...	5.7500	5.6417	5.5515	5.5575	5.5696	5.5876	0	32	24.0485	24.5209
...	5 ⁷ / ₈	5.8750	5.7667	5.6765	5.6825	5.6946	5.7126	0	32	25.1473	25.6303
6	...	6.0000	5.8917	5.8015	5.8075	5.8196	5.8376	0	31	26.2706	26.7642

NOTES:

- (1) For information only.
- (2) Minor diameter location for the calculation of area = $D - 2h_p$.
- (3) Area at minor diameter = $\pi\{[(D - 2h_p)/2]^2\}$.
- (4) For tensile stress area for UNJ threads, see applicable fastener standard such as SAE AS7251C, SAE AS7455A, SAE AS7459B, SAE AS7466E, SAE AS7477F, and SAE AS7478D.
- (5) See formulas in [Nonmandatory Appendix B, section B-1](#).
- (6) Standard sizes of the UNC, UNF, or UNEF series.

Table 11
Basic Dimensions for 8-Thread Series (UN, UNR, and UNJ)

Nominal Size		Basic Major Diameter, D bsc	Basic Pitch Diameter, D_2 bsc	UNR	UNJ	Basic UN Minor Diameter Internal, D_1 bsc	Basic UNJ Minor Diameter Internal, D_1 min. = D_1 bsc	Lead Angle at Basic Pitch Diameter, λ		Area at Minor Diameter, in. ² [Notes (1)–(4)]	UN/UNR Tensile Stress Area, in. ² [Notes (1), (4), (5)]
Primary	Secondary			Design Minor Diameter External, d_3 (Ref.)	Design Minor Diameter External, d_3 (Ref.)			deg	Min.		
1 [Note (6)]	...	1.0000	0.9188	0.8512	0.8557	0.8647	0.8782	2	29	0.551	0.606
...	$1\frac{1}{16}$	1.0625	0.9813	0.9137	0.9182	0.9272	0.9407	2	19	0.636	0.695
$1\frac{1}{8}$	...	1.1250	1.0438	0.9762	0.9807	0.9897	1.0032	2	11	0.728	0.790
...	$1\frac{3}{16}$	1.1875	1.1063	1.0387	1.0432	1.0522	1.0657	2	4	0.825	0.892
$1\frac{1}{4}$	...	1.2500	1.1688	1.1012	1.1057	1.1147	1.1282	1	57	0.929	1.000
...	$1\frac{5}{16}$	1.3125	1.2313	1.1637	1.1682	1.1772	1.1907	1	51	1.039	1.114
$1\frac{3}{8}$	...	1.3750	1.2938	1.2262	1.2307	1.2397	1.2532	1	46	1.155	1.233
...	$1\frac{7}{16}$	1.4375	1.3563	1.2887	1.2932	1.3022	1.3157	1	41	1.277	1.360
$1\frac{1}{2}$	...	1.5000	1.4188	1.3512	1.3557	1.3647	1.3782	1	36	1.41	1.49
...	$1\frac{9}{16}$	1.5625	1.4813	1.4137	1.4182	1.4272	1.4407	1	32	1.54	1.63
$1\frac{5}{8}$	...	1.6250	1.5438	1.4762	1.4807	1.4897	1.5032	1	29	1.68	1.77
...	$1\frac{11}{16}$	1.6875	1.6063	1.5387	1.5432	1.5522	1.5657	1	25	1.83	1.93
$1\frac{3}{4}$	...	1.7500	1.6688	1.6012	1.6057	1.6147	1.6282	1	22	1.98	2.08
...	$1\frac{13}{16}$	1.8125	1.7313	1.6637	1.6682	1.6772	1.6907	1	19	2.14	2.25
$1\frac{7}{8}$	...	1.8750	1.7938	1.7262	1.7307	1.7397	1.7532	1	16	2.30	2.41
...	$1\frac{15}{16}$	1.9375	1.8563	1.7887	1.7932	1.8022	1.8157	1	14	2.47	2.59
2	...	2.0000	1.9188	1.8512	1.8557	1.8647	1.8782	1	11	2.65	2.77
...	$2\frac{1}{8}$	2.1250	2.0438	1.9762	1.9807	1.9897	2.0032	1	7	3.03	3.15
$2\frac{1}{4}$	...	2.2500	2.1688	2.1012	2.1057	2.1147	2.1282	1	3	3.42	3.56
...	$2\frac{3}{8}$	2.3750	2.2938	2.2262	2.2307	2.2397	2.2532	0	60	3.85	3.99
$2\frac{1}{2}$	...	2.5000	2.4188	2.3512	2.3557	2.3647	2.3782	0	57	4.29	4.44
...	$2\frac{5}{8}$	2.6250	2.5438	2.4762	2.4807	2.4897	2.5032	0	54	4.76	4.92
$2\frac{3}{4}$	...	2.7500	2.6688	2.6012	2.6057	2.6147	2.6282	0	51	5.26	5.43
...	$2\frac{7}{8}$	2.8750	2.7938	2.7262	2.7307	2.7397	2.7532	0	49	5.78	5.95
3	...	3.0000	2.9188	2.8512	2.8557	2.8647	2.8782	0	47	6.32	6.51
...	$3\frac{1}{8}$	3.1250	3.0438	2.9762	2.9807	2.9897	3.0032	0	45	6.89	7.08
$3\frac{1}{4}$	...	3.2500	3.1688	3.1012	3.1057	3.1147	3.1282	0	43	7.49	7.69
...	$3\frac{3}{8}$	3.3750	3.2938	3.2262	3.2307	3.2397	3.2532	0	42	8.11	8.31

Table 11
Basic Dimensions for 8-Thread Series (UN, UNR, and UNJ) (Cont'd)

Nominal Size		Basic Major Diameter, D bsc	Basic Pitch Diameter, D_2 bsc	UNR Design Minor Diameter External, d_3 (Ref.)	UNJ Design Minor Diameter External, d_3 (Ref.)	Basic UN Minor Diameter Internal, D_1 bsc	Basic UNJ Minor Diameter Internal, D_1 min. = D_1 bsc	Lead Angle at Basic Pitch Diameter, λ		Area at Minor Diameter, in. ² [Notes (1)–(4)]	UN/UNR Tensile Stress Area, in. ² [Notes (1), (4), (5)]
Primary	Secondary							deg	Min.		
3½	...	3.5000	3.4188	3.3512	3.3557	3.3647	3.3782	0	40	8.75	8.96
...	3⅝	3.6250	3.5438	3.4762	3.4807	3.4897	3.5032	0	39	9.42	9.64
3¾	...	3.7500	3.6688	3.6012	3.6057	3.6147	3.6282	0	37	10.11	10.34
...	3⅞	3.8750	3.7938	3.7262	3.7307	3.7397	3.7532	0	36	10.83	11.06
4	...	4.0000	3.9188	3.8512	3.8557	3.8647	3.8782	0	35	11.57	11.81
...	4⅛	4.1250	4.0438	3.9762	3.9807	3.9897	4.0032	0	34	12.33	12.59
4¼	...	4.2500	4.1688	4.1012	4.1057	4.1147	4.1282	0	33	13.12	13.38
...	4⅜	4.3750	4.2938	4.2262	4.2307	4.2397	4.2532	0	32	13.94	14.21
4½	...	4.5000	4.4188	4.3512	4.3557	4.3647	4.3782	0	31	14.8	15.1
...	4⅝	4.6250	4.5438	4.4762	4.4807	4.4897	4.5032	0	30	15.6	15.9
4¾	...	4.7500	4.6688	4.6012	4.6057	4.6147	4.6282	0	29	16.5	16.8
...	4⅞	4.8750	4.7938	4.7262	4.7307	4.7397	4.7532	0	29	17.4	17.7
5	...	5.0000	4.9188	4.8512	4.8557	4.8647	4.8782	0	28	18.4	18.7
...	5⅛	5.1250	5.0438	4.9762	4.9807	4.9897	5.0032	0	27	19.3	19.7
5¼	...	5.2500	5.1688	5.1012	5.1057	5.1147	5.1282	0	26	20.3	20.7
...	5⅜	5.3750	5.2938	5.2262	5.2307	5.2397	5.2532	0	26	21.3	21.7
5½	...	5.5000	5.4188	5.3512	5.3557	5.3647	5.3782	0	25	22.4	22.7
...	5⅝	5.6250	5.5438	5.4762	5.4807	5.4897	5.5032	0	25	23.4	23.8
5¾	...	5.7500	5.6688	5.6012	5.6057	5.6147	5.6282	0	24	24.5	24.9
...	5⅞	5.8750	5.7938	5.7262	5.7307	5.7397	5.7532	0	24	25.6	26.0
6	...	6.0000	5.9188	5.8512	5.8557	5.8647	5.8782	0	23	26.8	27.1

NOTES:

- (1) For information only.
- (2) Minor diameter location for the calculation of area = $D - 2h_b$.
- (3) Area at minor diameter = $\pi\{[(D - 2h_b)/2]^2\}$.
- (4) For tensile stress area for UNJ threads, see applicable fastener standard such as SAE AS7251C, SAE AS7455A, SAE AS7459B, SAE AS7466E, SAE AS7477F, and SAE AS7478D.
- (5) See formulas in [Nonmandatory Appendix B, section B-1](#).
- (6) Standard sizes of the UNC, UNF, or UNEF series.

Table 12
Basic Dimensions for 12-Thread Series (UN, UNR, and UNJ)

Nominal Size		Basic Major Diameter, D bsc	Basic Pitch Diameter, D_2 bsc	UNR	UNJ	Basic UN Minor Diameter Internal, D_1 bsc	Basic UNJ Minor Diameter Internal, D_1 min. = D_1 bsc	Lead Angle at Basic Pitch Diameter, λ		Area at Minor Diameter, in. ² [Notes (1)–(4)]	UN/UNR Tensile Stress Area, in. ² [Notes (1), (4), (5)]
Primary	Secondary			Design Minor Diameter External, d_3 (Ref.)	Design Minor Diameter External, d_3 (Ref.)			deg	Min.		
$\frac{9}{16}$ [Note (6)]	...	0.5625	0.5084	0.4633	0.4663	0.4723	0.4813	2	59	0.162	0.182
$\frac{5}{8}$	...	0.6250	0.5709	0.5258	0.5288	0.5348	0.5438	2	40	0.210	0.232
...	$\frac{11}{16}$	0.6875	0.6334	0.5883	0.5913	0.5973	0.6063	2	24	0.264	0.289
$\frac{3}{4}$	...	0.7500	0.6959	0.6508	0.6538	0.6598	0.6688	2	11	0.323	0.351
...	$\frac{13}{16}$	0.8125	0.7584	0.7133	0.7163	0.7223	0.7313	2	0	0.390	0.420
$\frac{7}{8}$	...	0.8750	0.8209	0.7758	0.7788	0.7848	0.7938	1	51	0.462	0.495
...	$\frac{15}{16}$	0.9375	0.8834	0.8383	0.8413	0.8473	0.8563	1	43	0.540	0.576
1 [Note (6)]	...	1.0000	0.9459	0.9008	0.9038	0.9098	0.9188	1	36	0.625	0.663
...	$\frac{1}{16}$	1.0625	1.0084	0.9633	0.9663	0.9723	0.9813	1	30	0.715	0.756
$1\frac{1}{8}$ [Note (6)]	...	1.1250	1.0709	1.0258	1.0288	1.0348	1.0438	1	25	0.812	0.856
...	$\frac{3}{16}$ [Note (6)]	1.1875	1.1334	1.0883	1.0913	1.0973	1.1063	1	20	0.915	0.961
$1\frac{1}{4}$ [Note (6)]	...	1.2500	1.1959	1.1508	1.1538	1.1598	1.1688	1	16	1.024	1.073
...	$\frac{5}{16}$	1.3125	1.2584	1.2133	1.2163	1.2223	1.2313	1	12	1.139	1.191
$1\frac{3}{8}$ [Note (6)]	...	1.3750	1.3209	1.2758	1.2788	1.2848	1.2938	1	9	1.260	1.315
...	$\frac{7}{16}$	1.4375	1.3834	1.3383	1.3413	1.3473	1.3563	1	6	1.388	1.445
$1\frac{1}{2}$ [Note (6)]	...	1.5000	1.4459	1.4008	1.4038	1.4098	1.4188	1	3	1.520	1.580
...	$\frac{9}{16}$	1.5625	1.5084	1.4633	1.4663	1.4723	1.4813	1	0	1.660	1.720
$1\frac{5}{8}$	...	1.6250	1.5709	1.5258	1.5288	1.5348	1.5438	0	58	1.810	1.870
...	$\frac{11}{16}$	1.6875	1.6334	1.5883	1.5913	1.5973	1.6063	0	56	1.960	2.030
$1\frac{3}{4}$	...	1.7500	1.6959	1.6508	1.6538	1.6598	1.6688	0	54	2.120	2.190
...	$\frac{13}{16}$	1.8125	1.7584	1.7133	1.7163	1.7223	1.7313	0	52	2.280	2.350
$1\frac{7}{8}$	...	1.8750	1.8209	1.7758	1.7788	1.7848	1.7938	0	50	2.450	2.530
...	$\frac{15}{16}$	1.9375	1.8834	1.8383	1.8413	1.8473	1.8563	0	48	2.630	2.710
2	...	2.0000	1.9459	1.9008	1.9038	1.9098	1.9188	0	47	2.810	2.890
...	$2\frac{1}{8}$	2.1250	2.0709	2.0258	2.0288	2.0348	2.0438	0	44	3.190	3.280
$2\frac{1}{4}$	...	2.2500	2.1959	2.1508	2.1538	2.1598	2.1688	0	42	3.600	3.690

Table 12
Basic Dimensions for 12-Thread Series (UN, UNR, and UNJ) (Cont'd)

Nominal Size		Basic Major Diameter, D bsc	Basic Pitch Diameter, D_2 bsc	UNR Design Minor Diameter External, d_3 (Ref.)	UNJ Design Minor Diameter External, d_3 (Ref.)	Basic UN Minor Diameter Internal, D_1 bsc	Basic UNJ Minor Diameter Internal, D_1 min. = D_1 bsc	Lead Angle at Basic Pitch Diameter, λ		Area at Minor Diameter, in. ² [Notes (1)–(4)]	UN/UNR Tensile Stress Area, in. ² [Notes (1), (4), (5)]
								deg	Min.		
Primary	Secondary										
...	2 ³ / ₈	2.3750	2.3209	2.2758	2.2788	2.2848	2.2938	0	39	4.040	4.130
2 ¹ / ₂	...	2.5000	2.4459	2.4008	2.4038	2.4098	2.4188	0	37	4.490	4.600
...	2 ⁵ / ₈	2.6250	2.5709	2.5258	2.5288	2.5348	2.5438	0	35	4.970	5.080
2 ³ / ₄	...	2.7500	2.6959	2.6508	2.6538	2.6598	2.6688	0	34	5.480	5.590
...	2 ⁷ / ₈	2.8750	2.8209	2.7758	2.7788	2.7848	2.7938	0	32	6.010	6.130
3	...	3.0000	2.9459	2.9008	2.9038	2.9098	2.9188	0	31	6.570	6.690
...	3 ¹ / ₈	3.1250	3.0709	3.0258	3.0288	3.0348	3.0438	0	30	7.150	7.280
3 ¹ / ₄	...	3.2500	3.1959	3.1508	3.1538	3.1598	3.1688	0	29	7.800	7.900
...	3 ³ / ₈	3.3750	3.3209	3.2758	3.2788	3.2848	3.2938	0	27	8.400	8.500
3 ¹ / ₂	...	3.5000	3.4459	3.4008	3.4038	3.4098	3.4188	0	26	9.000	9.200
...	3 ⁵ / ₈	3.6250	3.5709	3.5258	3.5288	3.5348	3.5438	0	26	9.700	9.900
3 ³ / ₄	...	3.7500	3.6959	3.6508	3.6538	3.6598	3.6688	0	25	10.400	10.600
...	3 ⁷ / ₈	3.8750	3.8209	3.7758	3.7788	3.7848	3.7938	0	24	11.100	11.300
4	...	4.0000	3.9459	3.9008	3.9038	3.9098	3.9188	0	23	11.900	12.100
...	4 ¹ / ₈	4.1250	4.0709	4.0258	4.0288	4.0348	4.0438	0	22	12.700	12.800
4 ¹ / ₄	...	4.2500	4.1959	4.1508	4.1538	4.1598	4.1688	0	22	13.500	13.600
...	4 ³ / ₈	4.3750	4.3209	4.2758	4.2788	4.2848	4.2938	0	21	14.300	14.500
4 ¹ / ₂	...	4.5000	4.4459	4.4008	4.4038	4.4098	4.4188	0	21	15.100	15.300
...	4 ⁵ / ₈	4.6250	4.5709	4.5258	4.5288	4.5348	4.5438	0	20	16.000	16.200
4 ³ / ₄	...	4.7500	4.6959	4.6508	4.6538	4.6598	4.6688	0	19	16.900	17.100
...	4 ⁷ / ₈	4.8750	4.8209	4.7758	4.7788	4.7848	4.7938	0	19	17.800	18.000
5	...	5.0000	4.9459	4.9008	4.9038	4.9098	4.9188	0	18	18.800	19.000
...	5 ¹ / ₈	5.1250	5.0709	5.0258	5.0288	5.0348	5.0438	0	18	19.800	20.000
5 ¹ / ₄	...	5.2500	5.1959	5.1508	5.1538	5.1598	5.1688	0	18	20.800	21.000
...	5 ³ / ₈	5.3750	5.3209	5.2758	5.2788	5.2848	5.2938	0	17	21.800	22.000
5 ¹ / ₂	...	5.5000	5.4459	5.4008	5.4038	5.4098	5.4188	0	17	22.800	23.100
...	5 ⁵ / ₈	5.6250	5.5709	5.5258	5.5288	5.5348	5.5438	0	16	23.900	24.100

Table 12
Basic Dimensions for 12-Thread Series (UN, UNR, and UNJ) (Cont'd)

Nominal Size		Basic Major Diameter, D bsc	Basic Pitch Diameter, D_2 bsc	UNR	UNJ	Basic UN Minor Diameter Internal, D_1 bsc	Basic UNJ	Lead Angle at Basic Pitch Diameter, λ		Area at Minor Diameter, in. ² [Notes (1)–(4)]	UN/UNR Tensile Stress Area, in. ² [Notes (1), (4), (5)]
				Design Minor Diameter External, d_3 (Ref.)	Design Minor Diameter External, d_3 (Ref.)		Minor Diameter Internal, D_1 min. = D_1 bsc	deg	Min.		
Primary	Secondary										
5 ³ / ₄	...	5.7500	5.6959	5.6508	5.6538	5.6598	5.6688	0	16	25.000	25.200
	5 ⁷ / ₈	5.8750	5.8209	5.7758	5.7788	5.7848	5.7938	0	16	26.100	26.400
6	...	6.0000	5.9459	5.9008	5.9038	5.9098	5.9188	0	15	27.300	27.500

NOTES:

- (1) For information only.
- (2) Minor diameter location for the calculation of area = $D - 2h_b$.
- (3) Area at minor diameter = $\pi\{[(D - 2h_b)/2]^2\}$.
- (4) For tensile stress area for UNJ threads, see applicable fastener standard such as SAE AS7251C, SAE AS7455A, SAE AS7459B, SAE AS7466E, SAE AS7477F, and SAE AS7478D.
- (5) See formulas in [Nonmandatory Appendix B, section B-1](#).
- (6) Standard sizes of the UNC, UNF, or UNEF series.

Table 13
Basic Dimensions for 16-Thread Series (UN, UNR, and UNJ)

Nominal Size		Basic Major Diameter, D bsc	Basic Pitch Diameter, D_2 bsc	UNR Design Minor Diameter External, d_3 (Ref.)	UNJ Design Minor Diameter External, d_3 (Ref.)	Basic UN Minor Diameter Internal, D_1 bsc	Basic UNJ Minor Diameter Internal, D_1 min. = D_1 bsc	Lead Angle at Basic Pitch Diameter, λ		Area at Minor Diameter, in. ² [Notes (1)–(4)]	UN/UNR Tensile Stress Area, in. ² [Notes (1), (4), (5)]
								deg	Min.		
Primary	Secondary										
$\frac{3}{8}$ [Note (6)]	...	0.3750	0.3344	0.3006	0.3028	0.3073	0.3141	3	25	0.0678	0.0775
$\frac{7}{16}$	...	0.4375	0.3969	0.3631	0.3653	0.3698	0.3766	2	52	0.0997	0.1114
$\frac{1}{2}$	...	0.5000	0.4594	0.4256	0.4278	0.4323	0.4391	2	29	0.1378	0.1514
$\frac{9}{16}$	...	0.5625	0.5219	0.4881	0.4903	0.4948	0.5016	2	11	0.1819	0.1976
$\frac{5}{8}$	...	0.6250	0.5844	0.5506	0.5528	0.5573	0.5641	1	57	0.2320	0.2500
...	$1\frac{1}{16}$	0.6875	0.6469	0.6131	0.6153	0.6198	0.6266	1	46	0.2890	0.3080
$\frac{3}{4}$ [Note (6)]	...	0.7500	0.7094	0.6756	0.6778	0.6823	0.6891	1	36	0.3510	0.3730
...	$1\frac{3}{16}$	0.8125	0.7719	0.7381	0.7403	0.7448	0.7516	1	29	0.4200	0.4440
$\frac{7}{8}$	...	0.8750	0.8344	0.8006	0.8028	0.8073	0.8141	1	22	0.4950	0.5210
...	$1\frac{5}{16}$	0.9375	0.8969	0.8631	0.8653	0.8698	0.8766	1	16	0.5760	0.6040
1	...	1.0000	0.9594	0.9256	0.9278	0.9323	0.9391	1	11	0.6630	0.6930
...	$1\frac{1}{16}$	1.0625	1.0219	0.9881	0.9903	0.9948	1.0016	1	7	0.7560	0.7880
$1\frac{1}{8}$	...	1.1250	1.0844	1.0506	1.0528	1.0573	1.0641	1	3	0.8560	0.8890
...	$1\frac{3}{16}$	1.1875	1.1469	1.1131	1.1153	1.1198	1.1266	0	60	0.9610	0.9970
$1\frac{1}{4}$	...	1.2500	1.2094	1.1756	1.1778	1.1823	1.1891	0	57	1.0730	1.1110
...	$1\frac{5}{16}$	1.3125	1.2719	1.2381	1.2403	1.2448	1.2516	0	54	1.1910	1.2300
$1\frac{3}{8}$	...	1.3750	1.3344	1.3006	1.3028	1.3073	1.3141	0	51	1.3150	1.3560
...	$1\frac{7}{16}$	1.4375	1.3969	1.3631	1.3653	1.3698	1.3766	0	49	1.4450	1.4880
$1\frac{1}{2}$	...	1.5000	1.4594	1.4256	1.4278	1.4323	1.4391	0	47	1.5800	1.6300
...	$1\frac{9}{16}$	1.5625	1.5219	1.4881	1.4903	1.4948	1.5016	0	45	1.7200	1.7700
$1\frac{5}{8}$	...	1.6250	1.5844	1.5506	1.5528	1.5573	1.5641	0	43	1.8700	1.9200
...	$1\frac{11}{16}$	1.6875	1.6469	1.6131	1.6153	1.6198	1.6266	0	42	2.0300	2.0800
$1\frac{3}{4}$	...	1.7500	1.7094	1.6756	1.6778	1.6823	1.6891	0	40	2.1900	2.2400
...	$1\frac{13}{16}$	1.8125	1.7719	1.7381	1.7403	1.7448	1.7516	0	39	2.3500	2.4100
$1\frac{7}{8}$	...	1.8750	1.8344	1.8006	1.8028	1.8073	1.8141	0	37	2.5300	2.5800
...	$1\frac{15}{16}$	1.9375	1.8969	1.8631	1.8653	1.8698	1.8766	0	36	2.7100	2.7700
2	...	2.0000	1.9594	1.9256	1.9278	1.9323	1.9391	0	35	2.8900	2.9500
...	$2\frac{1}{8}$	2.1250	2.0844	2.0506	2.0528	2.0573	2.0641	0	33	3.2800	3.3500

Table 13
Basic Dimensions for 16-Thread Series (UN, UNR, and UNJ) (Cont'd)

Nominal Size		Basic Major Diameter, D bsc	Basic Pitch Diameter, D_2 bsc	UNR	UNJ	Basic UN Minor Diameter Internal, D_1 bsc	Basic UNJ Minor Diameter Internal, D_1 min. = D_1 bsc	Lead Angle at Basic Pitch Diameter, λ		Area at Minor Diameter, in. ² [Notes (1)–(4)]	UN/UNR Tensile Stress Area, in. ² [Notes (1), (4), (5)]
Primary	Secondary			Design Minor Diameter External, d_3 (Ref.)	Design Minor Diameter External, d_3 (Ref.)			deg	Min.		
2 $\frac{1}{4}$	...	2.2500	2.2094	2.1756	2.1778	2.1823	2.1891	0	31	3.6900	3.7600
...	2 $\frac{3}{8}$	2.3750	2.3344	2.3006	2.3028	2.3073	2.3141	0	29	4.1300	4.2100
2 $\frac{1}{2}$	...	2.5000	2.4594	2.4256	2.4278	2.4323	2.4391	0	28	4.6000	4.6700
...	2 $\frac{5}{8}$	2.6250	2.5844	2.5506	2.5528	2.5573	2.5641	0	26	5.0800	5.1600
2 $\frac{3}{4}$	...	2.7500	2.7094	2.6756	2.6778	2.6823	2.6891	0	25	5.5900	5.6800
...	2 $\frac{7}{8}$	2.8750	2.8344	2.8006	2.8028	2.8073	2.8141	0	24	6.1300	6.2200
3	...	3.0000	2.9594	2.9256	2.9278	2.9323	2.9391	0	23	6.6900	6.7800
...	3 $\frac{1}{8}$	3.1250	3.0844	3.0506	3.0528	3.0573	3.0641	0	22	7.2800	7.3700
3 $\frac{1}{4}$	...	3.2500	3.2094	3.1756	3.1778	3.1823	3.1891	0	21	7.8900	7.9900
...	3 $\frac{3}{8}$	3.3750	3.3344	3.3006	3.3028	3.3073	3.3141	0	21	8.5200	8.6300
3 $\frac{1}{2}$	...	3.5000	3.4594	3.4256	3.4278	3.4323	3.4391	0	20	9.1800	9.2900
...	3 $\frac{5}{8}$	3.6250	3.5844	3.5506	3.5528	3.5573	3.5641	0	19	9.8600	9.9800
3 $\frac{3}{4}$	...	3.7500	3.7094	3.6756	3.6778	3.6823	3.6891	0	18	10.5700	10.6900
...	3 $\frac{7}{8}$	3.8750	3.8344	3.8006	3.8028	3.8073	3.8141	0	18	11.3000	11.4300
4	...	4.0000	3.9594	3.9256	3.9278	3.9323	3.9391	0	17	12.0600	12.1900
...	4 $\frac{1}{8}$	4.1250	4.0844	4.0506	4.0528	4.0573	4.0641	0	17	12.8400	12.9700
4 $\frac{1}{4}$	...	4.2500	4.2094	4.1756	4.1778	4.1823	4.1891	0	16	13.6500	13.7800
...	4 $\frac{3}{8}$	4.3750	4.3344	4.3006	4.3028	4.3073	4.3141	0	16	14.4800	14.6200
4 $\frac{1}{2}$	...	4.5000	4.4594	4.4256	4.4278	4.4323	4.4391	0	15	15.3000	15.5000
...	4 $\frac{5}{8}$	4.6250	4.5844	4.5506	4.5528	4.5573	4.5641	0	15	16.2000	16.4000
4 $\frac{3}{4}$	...	4.7500	4.7094	4.6756	4.6778	4.6823	4.6891	0	15	17.1000	17.3000
...	4 $\frac{7}{8}$	4.8750	4.8344	4.8006	4.8028	4.8073	4.8141	0	14	18.0000	18.2000
5	...	5.0000	4.9594	4.9256	4.9278	4.9323	4.9391	0	14	19.0000	19.2000
...	5 $\frac{1}{8}$	5.1250	5.0844	5.0506	5.0528	5.0573	5.0641	0	13	20.0000	20.1000
5 $\frac{1}{4}$	...	5.2500	5.2094	5.1756	5.1778	5.1823	5.1891	0	13	21.0000	21.1000
...	5 $\frac{3}{8}$	5.3750	5.3344	5.3006	5.3028	5.3073	5.3141	0	13	22.0000	22.2000
5 $\frac{1}{2}$	...	5.5000	5.4594	5.4256	5.4278	5.4323	5.4391	0	13	23.1000	23.2000

Table 13
Basic Dimensions for 16-Thread Series (UN, UNR, and UNJ) (Cont'd)

Nominal Size		Basic Major Diameter, D bsc	Basic Pitch Diameter, D_2 bsc	UNR Design Minor Diameter External, d_3 (Ref.)	UNJ Design Minor Diameter External, d_3 (Ref.)	Basic UN Minor Diameter Internal, D_1 bsc	Basic UNJ Minor Diameter Internal, D_1 min. = D_1 bsc	Lead Angle at Basic Pitch Diameter, λ		Area at Minor Diameter, in. ² [Notes (1)–(4)]	UN/UNR Tensile Stress Area, in. ² [Notes (1), (4), (5)]
Primary	Secondary			deg	Min.						
...	5 ⁵ / ₈	5.6250	5.5844	5.5506	5.5528	5.5573	5.5641	0	12	24.1000	24.3000
5 ³ / ₄	...	5.7500	5.7094	5.6756	5.6778	5.6823	5.6891	0	12	25.2000	25.4000
...	5 ⁷ / ₈	5.8750	5.8344	5.8006	5.8028	5.8073	5.8141	0	12	26.4000	26.5000
6	...	6.0000	5.9594	5.9256	5.9278	5.9323	5.9391	0	11	27.5000	27.7000

NOTES:

- (1) For information only.
- (2) Minor diameter location for the calculation of area = $D - 2h_b$.
- (3) Area at minor diameter = $\pi\{[(D - 2h_b)/2]^2\}$.
- (4) For tensile stress area for UNJ threads, see applicable fastener standard such as SAE AS7251C, SAE AS7455A, SAE AS7459B, SAE AS7466E, SAE AS7477F, and SAE AS7478D.
- (5) See formulas in [Nonmandatory Appendix B, section B-1](#).
- (6) Standard sizes of the UNC, UNF, or UNEF series.

Table 14
Basic Dimensions for 20-Thread Series (UN, UNR, and UNJ)

Nominal Size		Basic Major Diameter, D bsc	Basic Pitch Diameter, D_2 bsc	UNR	UNJ	Basic UN Minor Diameter Internal, D_1 bsc	Basic UNJ Minor Diameter Internal, D_1 min. = D_1 bsc	Lead Angle at Basic Pitch Diameter, λ		Area at Minor Diameter, in. ² [Notes (1)–(4)]	UN/UNR Tensile Stress Area, in. ² [Notes (1), (4), (5)]
Primary	Secondary			Design Minor Diameter External, d_3 (Ref.)	Design Minor Diameter External, d_3 (Ref.)			deg	Min.		
$\frac{1}{4}$ [Note (6)]	...	0.2500	0.2175	0.1905	0.1922	0.1959	0.2013	4	12	0.0269	0.0318
$\frac{5}{16}$	...	0.3125	0.2800	0.2530	0.2547	0.2584	0.2638	3	15	0.0481	0.0546
$\frac{3}{8}$	...	0.3750	0.3425	0.3155	0.3172	0.3209	0.3263	2	40	0.0755	0.0836
$\frac{7}{16}$ [Note (6)]	...	0.4375	0.4050	0.3780	0.3797	0.3834	0.3888	2	15	0.1090	0.1187
$\frac{1}{2}$ [Note (6)]	...	0.5000	0.4675	0.4405	0.4422	0.4459	0.4513	1	57	0.1486	0.1599
$\frac{9}{16}$	...	0.5625	0.5300	0.5030	0.5047	0.5084	0.5138	1	43	0.1944	0.2073
$\frac{5}{8}$	...	0.6250	0.5925	0.5655	0.5672	0.5709	0.5763	1	32	0.2463	0.2608
...	$\frac{11}{16}$	0.6875	0.6550	0.6280	0.6297	0.6334	0.6388	1	24	0.3044	0.3205
$\frac{3}{4}$ [Note (6)]	...	0.7500	0.7175	0.6905	0.6922	0.6959	0.7013	1	16	0.3686	0.3862
...	$\frac{13}{16}$ [Note (6)]	0.8125	0.7800	0.7530	0.7547	0.7584	0.7638	1	10	0.4389	0.4581
$\frac{7}{8}$ [Note (6)]	...	0.8750	0.8425	0.8155	0.8172	0.8209	0.8263	1	5	0.5154	0.5362
...	$\frac{15}{16}$ [Note (6)]	0.9375	0.9050	0.8780	0.8797	0.8834	0.8888	1	0	0.5980	0.6204
1 [Note (6)]	...	1.0000	0.9675	0.9405	0.9422	0.9459	0.9513	0	57	0.6867	0.7107
...	$1\frac{1}{16}$	1.0625	1.0300	1.0030	1.0047	1.0084	1.0138	0	53	0.7816	0.8072
$1\frac{1}{8}$	...	1.1250	1.0925	1.0655	1.0672	1.0709	1.0763	0	50	0.8826	0.9098
...	$1\frac{3}{16}$	1.1875	1.1550	1.1280	1.1297	1.1334	1.1388	0	47	0.9897	1.0185
$1\frac{1}{4}$	...	1.2500	1.2175	1.1905	1.1922	1.1959	1.2013	0	45	1.1030	1.1334
...	$1\frac{5}{16}$	1.3125	1.2800	1.2530	1.2547	1.2584	1.2638	0	43	1.2224	1.2544
$1\frac{3}{8}$	...	1.3750	1.3425	1.3155	1.3172	1.3209	1.3263	0	41	1.3479	1.3815
...	$1\frac{7}{16}$	1.4375	1.4050	1.3780	1.3797	1.3834	1.3888	0	39	1.4796	1.5148
$1\frac{1}{2}$	...	1.5000	1.4675	1.4405	1.4422	1.4459	1.4513	0	37	1.6174	1.6542
...	$1\frac{9}{16}$	1.5625	1.5300	1.5030	1.5047	1.5084	1.5138	0	36	1.7614	1.7997
$1\frac{5}{8}$	...	1.6250	1.5925	1.5655	1.5672	1.5709	1.5763	0	34	1.9115	1.9514
...	$1\frac{11}{16}$	1.6875	1.6550	1.6280	1.6297	1.6334	1.6388	0	33	2.0677	2.1092
$1\frac{3}{4}$	...	1.7500	1.7175	1.6905	1.6922	1.6959	1.7013	0	32	2.2300	2.2732
...	$1\frac{13}{16}$	1.8125	1.7800	1.7530	1.7547	1.7584	1.7638	0	31	2.3985	2.4433
$1\frac{7}{8}$	...	1.8750	1.8425	1.8155	1.8172	1.8209	1.8263	0	30	2.5732	2.6195

Table 14
Basic Dimensions for 20-Thread Series (UN, UNR, and UNJ) (Cont'd)

Nominal Size		Basic Major Diameter, D bsc	Basic Pitch Diameter, D_2 bsc	UNR	UNJ	Basic UN Minor Diameter Internal, D_1 bsc	Basic UNJ Minor Diameter Internal, D_1 min. = D_1 bsc	Lead Angle at Basic Pitch Diameter, λ		Area at Minor Diameter, in. ² [Notes (1)–(4)]	UN/UNR Tensile Stress Area, in. ² [Notes (1), (4), (5)]
Primary	Secondary			Design Minor Diameter External, d_3 (Ref.)	Design Minor Diameter External, d_3 (Ref.)			deg	Min.		
...	$1\frac{15}{16}$	1.9375	1.9050	1.8780	1.8797	1.8834	1.8888	0	29	2.7539	2.8018
2	...	2.0000	1.9675	1.9405	1.9422	1.9459	1.9513	0	28	2.9409	2.9903
...	$2\frac{1}{8}$	2.1250	2.0925	2.0655	2.0672	2.0709	2.0763	0	26	3.3331	3.3857
$2\frac{1}{4}$	...	2.2500	2.2175	2.1905	2.1922	2.1959	2.2013	0	25	3.7498	3.8057
...	$2\frac{3}{8}$	2.3750	2.3425	2.3155	2.3172	2.3209	2.3263	0	23	4.1911	4.2502
$2\frac{1}{2}$	...	2.5000	2.4675	2.4405	2.4422	2.4459	2.4513	0	22	4.6570	4.7192
...	$2\frac{5}{8}$	2.6250	2.5925	2.5655	2.5672	2.5709	2.5763	0	21	5.1474	5.2128
$2\frac{3}{4}$	...	2.7500	2.7175	2.6905	2.6922	2.6959	2.7013	0	20	5.6623	5.7309
...	$2\frac{7}{8}$	2.8750	2.8425	2.8155	2.8172	2.8209	2.8263	0	19	6.2018	6.2736
3	...	3.0000	2.9675	2.9405	2.9422	2.9459	2.9513	0	18	6.7658	6.8408

NOTES:

- (1) For information only.
- (2) Minor diameter location for the calculation of area = $D - 2h_b$.
- (3) Area at minor diameter = $\pi\{[(D - 2h_b)/2]^2\}$.
- (4) For tensile stress area for UNJ threads, see applicable fastener standard such as SAE AS7251C, SAE AS7455A, SAE AS7459B, SAE AS7466E, SAE AS7477F, and SAE AS7478D.
- (5) See formulas in [Nonmandatory Appendix B, section B-1](#).
- (6) Standard sizes of the UNC, UNF, or UNEF series.

Table 15
Basic Dimensions for 28-Thread Series (UN, UNR, and UNJ)

Nominal Size		Basic Major Diameter, D bsc	Basic Pitch Diameter, D_2 bsc	UNR	UNJ	Basic UN Minor Diameter Internal, D_1 bsc	Basic UNJ Minor Diameter Internal, D_1 min. = D_1 bsc	Lead Angle at Basic Pitch Diameter, λ		Area at Minor Diameter, in. ² [Notes (1)–(4)]	UN/UNR Tensile Stress Area, in. ² [Notes (1), (4), (5)]
Primary	Secondary			Design Minor Diameter External, d_3 (Ref.)	Design Minor Diameter External, d_3 (Ref.)			deg	Min.		
...	12 [Note (6)]	0.2160	0.1928	0.1735	0.1748	0.1773	0.1812	3	23	0.0226	0.0258
$\frac{1}{4}$ [Note (6)]	...	0.2500	0.2268	0.2075	0.2088	0.2113	0.2152	2	52	0.0326	0.0364
$\frac{5}{16}$	...	0.3125	0.2893	0.2700	0.2713	0.2738	0.2777	2	15	0.0556	0.0606
$\frac{3}{8}$	...	0.3750	0.3518	0.3325	0.3338	0.3363	0.3402	1	51	0.0848	0.0909
$\frac{7}{16}$ [Note (6)]	...	0.4375	0.4143	0.3950	0.3963	0.3988	0.4027	1	34	0.1201	0.1274
$\frac{1}{2}$ [Note (6)]	...	0.5000	0.4768	0.4575	0.4588	0.4613	0.4652	1	22	0.1616	0.1700
$\frac{9}{16}$	...	0.5625	0.5393	0.5200	0.5213	0.5238	0.5277	1	12	0.2092	0.2187
$\frac{5}{8}$	...	0.6250	0.6018	0.5825	0.5838	0.5863	0.5902	1	5	0.2629	0.2736
...	$\frac{11}{16}$	0.6875	0.6643	0.6450	0.6463	0.6488	0.6527	0	59	0.3228	0.3346
$\frac{3}{4}$	...	0.7500	0.7268	0.7075	0.7088	0.7113	0.7152	0	54	0.3888	0.4017
...	$\frac{13}{16}$	0.8125	0.7893	0.7700	0.7713	0.7738	0.7777	0	50	0.4610	0.4750
$\frac{7}{8}$	...	0.8750	0.8518	0.8325	0.8338	0.8363	0.8402	0	46	0.5392	0.5544
...	$\frac{15}{16}$	0.9375	0.9143	0.8950	0.8963	0.8988	0.9027	0	43	0.6237	0.6400
1	...	1.0000	0.9768	0.9575	0.9588	0.9613	0.9652	0	40	0.7142	0.7317
...	$1\frac{1}{16}$	1.0625	1.0393	1.0200	1.0213	1.0238	1.0277	0	38	0.8109	0.8295
$1\frac{1}{8}$	...	1.1250	1.1018	1.0825	1.0838	1.0863	1.0902	0	35	0.9137	0.9335
...	$1\frac{3}{16}$	1.1875	1.1643	1.1450	1.1463	1.1488	1.1527	0	34	1.0227	1.0436
$1\frac{1}{4}$	...	1.2500	1.2268	1.2075	1.2088	1.2113	1.2152	0	32	1.1378	1.1598
...	$1\frac{5}{16}$	1.3125	1.2893	1.2700	1.2713	1.2738	1.2777	0	30	1.2590	1.2822
$1\frac{3}{8}$	...	1.3750	1.3518	1.3325	1.3338	1.3363	1.3402	0	29	1.3864	1.4107
...	$1\frac{7}{16}$	1.4375	1.4143	1.3950	1.3963	1.3988	1.4027	0	28	1.5199	1.5453
$1\frac{1}{2}$	...	1.5000	1.4768	1.4575	1.4588	1.4613	1.4652	0	26	1.6595	1.6861

NOTES:

- (1) For information only.
- (2) Minor diameter location for the calculation of area = $D - 2h_b$.
- (3) Area at minor diameter = $\pi\{[(D - 2h_b)/2]^2\}$.
- (4) For tensile stress area for UNJ threads, see applicable fastener standard such as SAE AS7251C, SAE AS7455A, SAE AS7459B, SAE AS7466E, SAE AS7477F, and SAE AS7478D.
- (5) See formulas in [Nonmandatory Appendix B, section B-1](#).
- (6) Standard sizes of the UNC, UNF, or UNEF series.

Table 16
Basic Dimensions for 32-Thread Series (UN, UNR, and UNJ)

Nominal Size		Basic Major Diameter, D bsc	Basic Pitch Diameter, D_2 bsc	UNR Design Minor Diameter External, d_3 (Ref.)	UNJ Design Minor Diameter External, d_3 (Ref.)	Basic UN Minor Diameter Internal, D_1 bsc	Basic UNJ Minor Diameter Internal, D_1 min. = D_1 bsc	Lead Angle at Basic Pitch Diameter, λ		Area at Minor Diameter, in. ² [Notes (1)–(4)]	UN/UNR Tensile Stress Area, in. ² [Notes (1), (4), (5)]
								deg	Min.		
Primary	Secondary										
6 [Note (6)]	...	0.1380	0.1177	0.1008	0.1019	0.1042	0.1076	4	51	0.00745	0.00908
8 [Note (6)]	...	0.1640	0.1437	0.1268	0.1279	0.1302	0.1336	3	58	0.01196	0.01401
10 [Note (6)]	...	0.1900	0.1697	0.1528	0.1539	0.1562	0.1596	3	22	0.01753	0.01999
...	12 [Note (6)]	0.2160	0.1957	0.1788	0.1799	0.1822	0.1856	2	55	0.02420	0.02700
1/4 [Note (6)]	...	0.2500	0.2297	0.2128	0.2139	0.2162	0.2196	2	29	0.03440	0.03790
5/16 [Note (6)]	...	0.3125	0.2922	0.2753	0.2764	0.2787	0.2821	1	57	0.05810	0.06250
3/8 [Note (6)]	...	0.3750	0.3547	0.3378	0.3389	0.3412	0.3446	1	36	0.08780	0.09320
7/16	...	0.4375	0.4172	0.4003	0.4014	0.4037	0.4071	1	22	0.12370	0.13010
1/2	...	0.5000	0.4797	0.4628	0.4639	0.4662	0.4696	1	11	0.16600	0.17300
9/16	...	0.5625	0.5422	0.5253	0.5264	0.5287	0.5321	1	3	0.21400	0.22200
5/8	...	0.6250	0.6047	0.5878	0.5889	0.5912	0.5946	0	57	0.26800	0.27800
...	11/16	0.6875	0.6672	0.6503	0.6514	0.6537	0.6571	0	51	0.32900	0.33900
3/4	...	0.7500	0.7297	0.7128	0.7139	0.7162	0.7196	0	47	0.39500	0.40700
...	13/16	0.8125	0.7922	0.7753	0.7764	0.7787	0.7821	0	43	0.46800	0.48000
7/8	...	0.8750	0.8547	0.8378	0.8389	0.8412	0.8446	0	40	0.54700	0.56000
...	15/16	0.9375	0.9172	0.9003	0.9014	0.9037	0.9071	0	37	0.63200	0.64600
1	...	1.0000	0.9797	0.9628	0.9639	0.9662	0.9696	0	35	0.72300	0.73800

NOTES:

- (1) For information only.
- (2) Minor diameter location for the calculation of area = $D - 2h_b$.
- (3) Area at minor diameter = $\pi\{[(D - 2h_b)/2]^2\}$.
- (4) For tensile stress area for UNJ threads, see applicable fastener standard such as SAE AS7251C, SAE AS7455A, SAE AS7459B, SAE AS7466E, SAE AS7477F, and SAE AS7478D.
- (5) See formulas in [Nonmandatory Appendix B, section B-1](#).
- (6) Standard sizes of the UNC, UNF, or UNEF series.

Table 17A
Outline Guide for Determining Limits of Size of External Threads

Thread Class	Major Diameter, d		Pitch Diameter, d_2		Minor Diameter, d_1
	Max.	Min.	Max.	Min.	
1A	Nominal size – allowance	Maximum – tolerance	Max. major diameter – h_b (see Table 5 , col. 22 for h_b values)	Maximum – tolerance	See para. 8.3.1(e) for max. and para. 8.3.1(f) for min.; established by crest of new tool and minimum minor diameter of GO thread gage
2A	Nominal size – allowance	Maximum – tolerance	Max. major diameter – h_b (see Table 5 , col. 22 for h_b values)	Maximum – tolerance	See para. 8.3.1(e) for max. and para. 8.3.1(f) for min.; established by crest of new tool and minimum minor diameter of GO thread gage
3A	Nominal size	Maximum – tolerance	Max. major diameter – h_b (see Table 5 , col. 22 for h_b values)	Maximum – tolerance	See para. 8.3.1(e) for max. and para. 8.3.1(f) for min.; established by crest of new tool and minimum minor diameter of GO thread gage

Table 17B
Outline Guide for Determining Limits of Size of Internal Threads

Thread Class	Minor Diameter, D_1		Pitch Diameter, D_2		Major Diameter, D
	Min.	Max.	Min.	Max.	
1B	Nominal size $-2h_n$ [see Table 5 , col. 26 (UN) or 25 (UN)] for h_b values; see para. 8.3.2(e) for formulas]	Minimum, 6 decimal place value + tolerance [see para. 8.3.2(f)]	Nominal size $-h_b$ [see Table 5 , col. 22 for h_b values and para. 8.3.2(c) for formula]	Minimum + tolerance	See para. 8.3.2(a) for max. and para. 8.3.2(b) for min.; established by crest of new tool and maximum major diameter of GO thread gage
2B	Nominal size $-2h_n$ [see Table 5 , col. 26 (UN) or 25 (UN)] for h_b values; see para. 8.3.2(e) for formulas]	Minimum, 6 decimal place value + tolerance [see para. 8.3.2(f)]	Nominal size $-h_b$ [see Table 5 , col. 22 for h_b values and para. 8.3.2(c) for formula]	Minimum + tolerance	See para. 8.3.2(a) for max. and para. 8.3.2(b) for min.; established by crest of new tool and maximum major diameter of GO thread gage
3B	Nominal size $-2h_n$ [see Table 5 , col. 26 (UN) or 25 (UN)] for h_b values; see para. 8.3.2(e) for formulas]	Minimum, 6 decimal place value + tolerance [see para. 8.3.2(f)]	Nominal size $-h_b$ [see Table 5 , col. 22 for h_b values and para. 8.3.2(c) for formula]	Minimum + tolerance	See para. 8.3.2(a) for max. and para. 8.3.2(b) for min.; established by crest of new tool and maximum major diameter of GO thread gage

Table 18A
Examples of External 2A Screw Threads

Thread Size = $\frac{1}{2}$ -28 or 0.5000-28 UNEF-2A		
Characteristic Description	Example of Size Calculation	Additional Information
(1) Maximum external major diameter, d max. = Basic major diameter, d bsc – allowance, es	d max. = d bsc – es	...
	d bsc = 0.5000	This is the final value of the basic major diameter, which is rounded to four decimal places.
	es = 0.300 (Td_2 for Class 2A)	For the Class 2A pitch diameter tolerance, see (4).
	es = 0.300 (0.003668)	The six-decimal place value for Class 2A pitch diameter tolerance, Td_2 , is used in this calculation.
	es = 0.001100	This figure is rounded to four decimal places to obtain the final value of es .
	es = 0.0011	...
	d max. = 0.5000 – 0.0011	...
	d max. = 0.4989	...
(2) Minimum external major diameter, d min. = Maximum external major diameter, d max. – major diameter tolerance, Td	d min. = d max. – Td	...
	Td = $0.060 \sqrt[3]{P^2}$	...
	Td = $0.060 \sqrt[3]{(0.03571429)^2}$	All thread calculations should be performed using the 10-decimal-place truncated value of P rounded to 8 decimal places.
	Td = $0.060 \sqrt[3]{0.001276}$	...
	Td = 0.060 (0.108463)	...
	Td = 0.006508	This figure is rounded to four decimal places to obtain the final value of Td .
	Td = 0.0065	...
	d min. = 0.4989 – 0.0065	...
	d min. = 0.4924	...
(3) Maximum external pitch diameter, d_2 max. = Maximum external major diameter, d max. – twice the external thread addendum, h_b	d_2 max. = d max. – h_b	...
	h_b = 0.64951905 P	...
	h_b = 0.64951905(0.03571429)	All thread calculations should be performed using the 10-decimal-place truncated value of P rounded to 8 decimal places.
	h_b = 0.023197	...
	d_2 max. = 0.4989 – 0.023197	...
	d_2 max. = 0.475703	This figure is rounded to four decimal places to obtain the final value of d_2 max.
	d_2 max. = 0.4757	...

Table 18A
Examples of External 2A Screw Threads (Cont'd)

Thread Size = 1/2-28 or 0.5000-28 UNEF-2A		
Characteristic Description	Example of Size Calculation	Additional Information
(4) Minimum external pitch diameter, d_2 min. = Maximum external pitch diameter, d_2 max. – external pitch diameter tolerance, Td_2	$d_2 \text{ min.} = d_2 \text{ max.} - Td_2$	...
	$Td_2 = 0.0015 \sqrt[3]{d_{\text{bsc}}} + 0.0015 \sqrt{LE} + 0.015 \sqrt[3]{P^2}$	Length of engagement, LE , required in this example is equal to $9P$. See para. 5.2 for LE applications for other thread series.
	$Td_2 = 0.0015 \sqrt[3]{0.5000} + 0.0015 \sqrt{9(0.03571429)} + 0.015 \sqrt[3]{(0.03571429)^2}$	...
	$Td_2 = 0.0015 \sqrt[3]{0.5000} + 0.0015 \sqrt{0.321429} + 0.015 \sqrt[3]{0.001276}$	...
	$Td_2 = (0.0015)(0.793701) + (0.0015)(0.566947) + (0.015)(0.108463)$	...
	$Td_2 = 0.001191 + 0.000850 + 0.001627$	...
	$Td_2 = 0.003668$	This figure is rounded to four decimal places to obtain the final value of the external pitch diameter tolerance Td_2 .
	$Td_2 = 0.0037$	...
	$d_2 \text{ min.} = 0.4757 - 0.0037$	...
	$d_2 \text{ min.} = 0.4720$	This figure is the four-decimal-place final value of d_2 min.
(5) Maximum external UN minor diameter, d_1 max. = Maximum external major diameter, d max. – double height of external UN thread, $2h_s$	$d_1 \text{ max.} = d \text{ max.} - 2h_s$	...
	$2h_s = 1.08253175P$	For UN threads, $2h_s = 2h_n$
	$2h_s = 1.08253175(0.03571429)$	All thread calculations should be performed using P rounded to eight decimal places.
	$2h_s = 0.038662$	...
	$d_1 \text{ max.} = 0.4989 - 0.038662$	...
	$d_1 \text{ max.} = 0.460238$	This figure is rounded to four decimal places to obtain the final value of d_1 max.
	$d_1 \text{ max.} = 0.4602$	...

GENERAL NOTES:

(a) All dimensions expressed in inches for calculations in this table.

(b) $P = 1/n = 1/28 = 0.03571429$.

Table 18B
Example of External 3A Screw Threads

Thread Size = $\frac{7}{16}$ -14 or 0.4375-14 UNC 3A		
Characteristic Description	Example of Size Calculation	Additional Information
(1) Maximum external major diameter, d max. = Basic major diameter, d bsc	d max. = D bsc	...
	D bsc = 0.4375	This is the final value of the basic major diameter, which is expressed in four decimal places.
	d max. = 0.4375	...
(2) Minimum external major diameter, d min. = Maximum external major diameter, d max. - major diameter tolerance, Td	d min. = d max. - Td	...
	$Td = 0.060\sqrt[3]{P^2}$	...
	$Td = 0.060\sqrt[3]{0.07142857^2}$	All thread calculations should be performed using the 10-decimal-place truncated value of P rounded to 8 decimal places.
	$Td = 0.060\sqrt[3]{0.005102}$	...
	$Td = 0.060$ (0.172153)	...
	$Td = 0.010329$	This figure is rounded to four decimal places to obtain the final value of Td .
	$Td = 0.0103$	...
	d min. = $0.4375 - 0.0103$	...
	d min. = 0.4272	...
(3) Maximum external pitch diameter, d_2 max. = Maximum external major diameter, d max. - twice the external thread addendum, h_b	d_2 max = d max - h_b	...
	$h_b = 0.64951905P$	...
	$h_b = 0.64951905$ (0.07142857)	All thread calculations should be performed using the 10-decimal-place truncated value of P rounded to 8 decimal places.
	$h_b = 0.046394$	...
	d_2 max. = $0.4375 - 0.046394$	...
	d_2 max. = 0.391106	This figure is rounded to four decimal places to obtain the final value of d_2 max.
	d_2 max. = 0.3911	...

Table 18B
Example of External 3A Screw Threads (Cont'd)

Thread Size = $\frac{7}{16}$ -14 or 0.4375-14 UNC 3A		
Characteristic Description	Example of Size Calculation	Additional Information
(4) Minimum external pitch diameter, d_2 min. = Maximum external pitch diameter, d_2 max. - external pitch diameter tolerance, Td_2	$d_2 \text{ min.} = d_2 \text{ max.} - Td_2$	...
	$Td_2 = 0.7500[0.0015\sqrt[3]{D \text{ bsc}} + 0.0015\sqrt{LE} + 0.015\sqrt[3]{P^2}]$	LE required in this example is equal to 1 Dia. See para. 5.2 for LE applications for other thread series.
	$Td_2 = 0.7500[0.0015\sqrt[3]{0.4375} + 0.0015\sqrt{0.4375} + 0.015\sqrt[3]{(0.07142857)^2}]$	...
	$Td_2 = 0.7500[0.0015\sqrt[3]{0.4375} + 0.0015\sqrt{0.4375} + 0.015\sqrt[3]{0.005102}]$	...
	$Td_2 = 0.7500[(0.0015)(0.759147) + (0.0015)(0.661438) + (0.015)(0.172153)]$	...
	$Td_2 = 0.7500(0.001139 + 0.000992 + 0.002582)$	...
	$Td_2 = 0.7500(0.004713)$	...
	$Td_2 = 0.003535$	This figure is rounded to four decimal places to obtain the final value of the external pitch diameter tolerance, Td_2 .
	$Td_2 = 0.0035$	...
	$d_2 \text{ min.} = 0.3911 - 0.0035$	...
	$d_2 \text{ min.} = 0.3876$	...
(5) Maximum external UNR minor diameter, d_3 max. = Maximum external major diameter, d max. - double height of external UNR thread, $2h_s$	$d_3 \text{ max.} = d \text{ max.} - 2h_s$	...
	$2h_s = 1.22686932P$	...
	$2h_s = 1.22686932(0.07142857)$	All thread calculations should be performed using the 10-decimal-place truncated value of P rounded to 8 decimal places.
	$2h_s = 0.087634$	...
	$d_3 \text{ max.} = 0.4375 - 0.087634$	...
	$d_3 \text{ max.} = 0.349866$	This figure is rounded to four decimal places to obtain the final value of d_3 max.
	$d_3 \text{ max.} = 0.3499$	...

Table 18B
Example of External 3A Screw Threads (Cont'd)

Thread Size = $\frac{7}{16}$ -14 or 0.4375-14 UNC 3A		
Characteristic Description	Example of Size Calculation	Additional Information
(6) Maximum external UN minor diameter, d_1 max. = Maximum external major diameter, d max. – double height of external UN thread, $2h_n$	$d_1 \text{ max.} = d \text{ max.} - 2h_n$	...
	$2h_n = 1.08253175P$	...
	$2h_n = 1.08253175 (0.07142857)$	All thread calculations should be performed using the 10-decimal-place truncated value of P rounded to 8 decimal places.
	$2h_n = 0.077324$	...
	$d_1 \text{ max.} = 0.4375 - 0.077324$	...
	$d_1 \text{ max.} = 0.360176$	This figure is rounded to four decimal places to obtain the final value of d_1 max.
	$d_1 \text{ max.} = 0.3602$	...

GENERAL NOTES:

(a) All dimensions expressed in inches for calculations in this table.

(b) $P = 1/n = 1/14 = 0.07142857$.

Table 18C
Examples of Internal 2B Screw Threads

Thread Size = 1/2-28 or 0.5000-28 UNEF-2B		
Characteristic Description	Example of Size Calculation	Additional Information
(1) Minimum internal minor diameter, D_1 min. = Basic major diameter, D bsc – double height of internal thread, $2h_n$	D_1 min. = D bsc – $2h_n$	...
	$2h_n = 1.08253175P$	...
	$2h_n = 1.08253175$ (0.03571429)	All thread calculations should be performed using the 10-decimal-place truncated value of P rounded to 8 decimal places.
	$2h_n = 0.038662$	...
	D_1 min. = $0.5000 - 0.038662$	...
	D_1 min. = 0.461338	For the Class 2B thread used in this example, this figure is rounded to three decimal places to obtain the final value of D_1 min. Other sizes and classes may be expressed in a four-place decimal. See para. 8.3.2(e) .
	D_1 min. = 0.461	...
(2) Maximum internal minor diameter, D_1 max. = Minimum internal minor diameter, D_1 min., rounded to six decimal places + internal minor diameter tolerance, TD_1	D_1 max. = $0.008929 - 0.000510D_1$ min. (to six decimal plates) + TD_1	See para. 5.8.2(c) for limitations on use of this formula.
	$TD_1 = 0.25P - 0.4P^2$	...
	$TD_1 = 0.25$ (0.03571429) – 0.4 (0.03571429) ²	All thread calculations should be performed using the 10-decimal-place truncated value of P rounded to 8 decimal places.
	$TD_1 = 0.25$ (0.03571429) – 0.4 (0.001276)	...
	$TD_1 = 0.008929 - 0.000510$	...
	$TD_1 = 0.008419$	...
	$TD_1 = 0.0084$	This figure is rounded to four decimal places to obtain the final value of TD_1 .
	D_1 max. = $0.461338 + 0.0084$	...
	D_1 max. = 0.469738	For the Class 2B thread used in this example, this figure is rounded to three decimal places to obtain the final value of D_1 max. Other sizes and classes may be expressed in a four-place decimal. See para. 8.3.2(f) .
	D_1 max. = 0.470	...

Table 18C
Examples of Internal 2B Screw Threads (Cont'd)

Thread Size = $\frac{1}{2}$ -28 or 0.5000-28 UNEF-2B		
Characteristic Description	Example of Size Calculation	Additional Information
(3) Minimum internal pitch diameter, D_2 min. = Basic major diameter, D bsc – twice the external thread addendum, h_b	$D_2 \text{ min.} = D \text{ bsc} - h_b$	...
	$h_b = 0.64951905P$	...
	$h_b = 0.64951905(0.03571429)$	All thread calculations should be performed using the 10-decimal-place truncated value of P rounded to 8 decimal places.
	$h_b = 0.023197$	...
	$D_2 \text{ min.} = 0.5000 - 0.023197$	...
	$D_2 \text{ min.} = 0.476803$	This figure is rounded to four decimal places to obtain the final value of D_2 min.
(4) Maximum internal pitch diameter, D_2 max. = Minimum internal pitch diameter, D_2 min. + internal pitch diameter tolerance, TD_2	$D_2 \text{ min.} = 0.4768$	...
	$D_2 \text{ max.} = D_2 \text{ min.} + TD_2$	...
	$TD_2 = 1.300$ (Td_2 for Class 2A)	The constant 1.300 is for this Class 2B example and will be different for Classes 1B and 3B. See para. 5.8.2 .
	$TD_2 = 1.300$ (0.003668)	For Td_2 , the six-place-decimal value of the Class 2A pitch diameter tolerance is used; see Table 18A, (4) .
	$TD_2 = 0.004768$	...
	$TD_2 = 0.0048$	This figure is rounded to four decimal places to obtain the final value of TD_2 .
(5) Minimum internal major diameter, D min. = Basic major diameter, D bsc	$D_2 \text{ max.} = 0.4768 + 0.0048$	...
	$D_2 \text{ max.} = 0.4816$	...
	$D \text{ min.} = D \text{ bsc}$	...
	$D \text{ bsc} = 0.5000$	...
	$D \text{ min.} = 0.5000$	...

GENERAL NOTES:

(a) All dimensions expressed in inches for calculations in this table.

(b) $P = 1/n = 1/28 = 0.03571429$.

Table 18D
Example of Internal 3B Screw Threads

Thread Size = $\frac{7}{16}$ -14 or 0.4375-14 UNC 3B		
Characteristic Description	Example of Size Calculation	Additional Information
(1) Minimum internal minor diameter, D_1 min. = Basic major diameter, D bsc – double height of internal thread, $2h_n$	$D_1 \text{ min.} = D \text{ bsc} - 2h_n$	...
	$2h_n = 1.08253175P$	All thread calculations should be performed using the 10-decimal-place truncated value of P rounded to 8 decimal places.
	$2h_n = 1.08253175 (0.07142857)$	...
	$2h_n = 0.077324$	This value is used in an intermediate calculation and therefore is rounded to six decimal places; see ASME B1.30.
	$D_1 \text{ min.} = 0.4375 - 0.077324$	...
	$D_1 \text{ min.} = 0.360176$	For the Class 3B thread used in this example, this figure is rounded to three decimal places and a zero is added to yield a four-decimal-place final value of D_1 min. See para. 8.3.2(e)(1)(-c) . Other sizes and classes may be expressed in a three-place decimal. See para 8.3.2(e)(1) .
	$D_1 \text{ min.} = 0.360$	
	$D_1 \text{ min.} = 0.3600$	

Table 18D
Example of Internal 3B Screw Threads (Cont'd)

Thread Size = $\frac{7}{16}$ -14 or 0.4375-14 UNC 3B		
Characteristic Description	Example of Size Calculation	Additional Information
(2) Maximum internal minor diameter, D_1 max. = Minimum internal minor diameter, D_1 min. rounded to six decimal places + internal minor diameter tolerance, TD_1	$D_1 \text{ max.} = D_1 \text{ min. (to 6 decimal places)} + TD_1$	See para. 8.3.2(f)(1) for exception rule when calculating D_1 max.
	$TD_1 =$	The value used for TD_1 is determined by one of three calculations based on certain limitations. See para. 5.8.2(c)(3) for limitations.
	$= [0.05\sqrt[3]{P^2} + (0.03P)/D - 0.002]$	See para. 5.8.2(c)(3) for limitations on the use of this formula.
	$= [0.05\sqrt[3]{0.07142857^2} + (0.03)(0.07142857/0.4375) - 0.002]$	All thread calculations should be performed using the 10-decimal-place truncated value of P rounded to 8 decimal places.
	$= [0.05\sqrt[3]{0.005102} + (0.002143/0.4375) - 0.002]$	Limitation on the use of this value is based on the next two calculations.
	$= [(0.05(0.172153) + (0.004898 - 0.002))]$	
	$= 0.008608 + 0.004898 - 0.002$	
	$= 0.011506$	
	$= 0.394P$	Limitation as listed in para. 5.8.2(c)(3)(-a)(-1). Tolerance shall be not greater than $0.39400P$.
	$= 0.394(0.07142857)$	
	$= 0.028143$	
	$= 0.23P - 1.5P^2$	Limitation as listed in para. 5.8.2(c)(3)(-a)(-2)(+a). Tolerance shall be not less than $0.2300P - 1.500P^2$ for 80 to 13 threads per inch, inclusive.
	$= 0.23(0.07142857) - 1.5(0.07142857)^2$	...
	$= 0.016429 - 1.5(0.005102)$	...
	$= 0.016429 - 0.007653$	
	$= 0.008776$	...
	$TD_1 = 0.011506$	For TD_1 in the example, 0.011506 is not greater than 0.028143 and not less than 0.008776, so the value of 0.011506 is used. NOTE: Six-decimal-place values are used for the comparison of limitation values to the calculated TD_1 value, then the final determination is rounded to four places.
	$TD_1 = 0.0115$	This figure is rounded to four decimal places to obtain the final value of TD_1 .
	$D_1 \text{ max.} = 0.360176 + 0.0115$	...

Table 18D
Example of Internal 3B Screw Threads (Cont'd)

Thread Size = $\frac{7}{16}$ -14 or 0.4375-14 UNC 3B		
Characteristic Description	Example of Size Calculation	Additional Information
(2) cont'd	$D_1 \text{ max.} = 0.371676$	For the Class 3B thread used in the example, this figure is rounded to four decimal places to obtain the final value of $D_1 \text{ max.}$ Other sizes and classes may be expressed in a three-place decimal. See para. 8.3.2(f)(1)(-c) .
	$D_1 \text{ max.} = 0.3717$	...
(3) Minimum internal pitch diameter, $D_2 \text{ min.}$ = Basic major diameter, $D \text{ bsc}$ – twice the external thread addendum, h_b	$D_2 \text{ min.} = D \text{ bsc} - h_b$	...
	$h_b = 0.64951905P$	...
	$h_b = 0.64951905 (0.07142857)$	All thread calculations should be performed using the 10-decimal-place truncated value of P rounded to 8 decimal places.
	$h_b = 0.046394$	...
	$D_2 \text{ min.} = 0.4375 - 0.046394$	...
	$D_2 \text{ min.} = 0.391106$	This figure is rounded to four decimal places to obtain the final value of $D_2 \text{ min.}$
	$D_2 \text{ min.} = 0.3911$	...
(4) Maximum internal pitch diameter, $D_2 \text{ max.}$ = Minimum internal pitch diameter, $D_2 \text{ min.}$ + internal pitch diameter tolerance, TD_2	$D_2 \text{ max.} = D_2 \text{ min.} + TD_2$	...
	$TD_2 = 0.9750 (TD_2 \text{ for Class 2A})$	The constant 0.9750 is for this Class 3B example and will be different for Classes 1B and 2B. See para. 5.8.2(b) .
	$TD_2 = 0.9750 (0.004713)$	For the TD_2 Class 2A pitch diameter tolerance, see para. 5.8.1(c) . The six-place decimal place value is used.
	$TD_2 = 0.004595$	This figure is rounded to four decimal places to obtain the final value of TD_2 .
	$TD_2 = 0.0046$	
	$D_2 \text{ max.} = 0.3911 + 0.0046$	
	$D_2 \text{ max.} = 0.3957$	...
(5) Minimum internal major diameter, $D \text{ min.}$ = Basic major diameter, $D \text{ bsc}$	$D \text{ min.} = D \text{ bsc}$	...
	$D \text{ bsc} = 0.4375$	...
	$D \text{ min.} = 0.4375$	...

GENERAL NOTES:

(a) All dimensions expressed in inches for calculations in this table.

(b) $P = 1/n = 1/14 = 0.07142857$.

Table 19
Allowable Variation in 30-deg Basic Half Angle of
External and Internal Screw Threads

Threads/in.	Allowable Variation in Half Angle of Thread	
	±deg	Minutes
80	3	00
72	2	45
64	2	30
56	2	15
48	2	00
44	1	50
40	1	45
36	1	35
32	1	30
28	1	20
27	1	20
24	1	15
20	1	10
18	1	05
16	1	00
14	0	55
13	0	55
12	0	55
11½	0	50
11	0	50
10	0	50
9	0	50
8	0	45
7	0	45
6	0	40
5	0	40
4½	0	40
4	0	40

GENERAL NOTE: See [paras. 9.2.3](#) through [9.2.6](#) for applicability.

Table 20
Nomenclature

Symbol	Dimension	Remarks
C	Correction to measurement over best size wires to give pitch diameter	d_2 or $D_2 = M_w - C - c$ $C = W (1 + \operatorname{cosec} \alpha) - (\cot \alpha)/2n$
c	Wire angle correction for large lead angles	See ASME B1.2
D	Major diameter, internal thread	...
d	Major diameter, external thread	...
D_{bsc}	Basic major diameter, internal thread	...
d_{bsc}	Basic major diameter, external thread	...
$D_{\text{max.}}$	Maximum major diameter, internal thread	...
$d_{\text{max.}}$	Maximum major diameter, external thread	...
$D_{\text{min.}}$	Minimum major diameter, internal thread	...
$d_{\text{min.}}$	Minimum major diameter, external thread	...
D_1	Minor diameter, internal thread	...
d_1	Minor diameter, external thread	...
$D_1 \text{ bsc}$	Basic minor diameter, internal thread	...
$D_1 \text{ max.}$	Maximum minor diameter, internal thread	...
$d_1 \text{ max.}$	Maximum minor diameter, external thread	...
$D_1 \text{ min.}$	Minimum minor diameter, internal thread	...
$d_1 \text{ min.}$	Minimum minor diameter, external thread	...
D_2	Pitch diameter, internal thread	...
d_2	Pitch diameter, external thread	...
$D_2 \text{ bsc}$	Basic pitch diameter, internal thread	...
$D_2 \text{ max.}$	Maximum pitch diameter, internal thread	...
$d_2 \text{ max.}$	Maximum pitch diameter, external thread	...
$D_2 \text{ min.}$	Minimum pitch diameter, internal thread	...
$d_2 \text{ min.}$	Minimum pitch diameter, external thread	...
D_3	Major diameter, rounded root, internal thread	...
$d_3 \text{ min.}$	Minimum minor diameter, rounded root, external thread	...
El	Allowance at major, pitch, and minor diameters of internal thread	...
es	Allowance at major, pitch, and minor diameters of external thread	...
H	Height of fundamental triangle	...
h	Thread height (or depth)	...
h_a	Addendum	...
h_{as}	Addendum of external thread	...
h_b	Twice the external thread addendum	...
h_d	Dedendum	...
h_e	Depth of thread engagement	...
h_n	Height of UN internal thread	...
h_s	Height of UN, UNR or UNJ external thread; UN, UNR, and UNJ have different values for thread height	See Table 5
L_{tn}	Length of complete internal thread, including chamfer	...
L_{ts}	Length of complete external thread	...
LE	Length of thread engagement	...
LG	Gaging length	...
M_w	Measurement over wires	...
N	$1/L$, number of turns per unit of length (per in.)	...
n	$1/P$, number of threads per unit of length (per in.)	...
P	Pitch	...
r	Root radius, external thread	...
$r \text{ max.}$	Maximum root radius, external thread	...

Table 20
Nomenclature (Cont'd)

Symbol	Dimension	Remarks
r min.	Minimum root radius, external thread	...
T	Tolerance, internal or external thread	...
Td	Major diameter tolerance, external thread	...
TD_1	Minor diameter tolerance, internal thread	...
Td_1	Minor diameter tolerance, external thread	...
TD_2	Pitch diameter tolerance, internal thread	...
Td_2	Pitch diameter tolerance, external thread	...
Td_3	Minor diameter tolerance, external thread, rounded form	...
W	Diameter of measuring wires	...
α	Half angle of symmetrical thread	...
α_1	Angle between leading flank of thread and normal to axis of thread	...
α_2	Angle between following flank of thread and normal to axis of thread	...
$\Delta d_2 \alpha$	Pitch diameter equivalent of variation in combined flank angles	...
$\Delta d_2 \lambda$ or $\Delta D_2 \lambda$	Pitch diameter equivalent of variation in pitch (lead)	...
Prefix symbol with Δ	Variation in any dimension	Examples: Variation in pitch, ΔP Variation in half angle, $\Delta \alpha_1$ or $\Delta \alpha_2$
λ	Lead angle	$\tan \lambda = L \pi (d_2 \text{ or } D_2)$
λ'	Wire angle	...
Radius of rounding at:		
R_{cn}	Crest of internal thread	...
r_{cs}	Crest of external thread	...
R_{rn}	Root of internal thread	...
r_{rs}	Root of external thread	...
Radial distance from apex of fundamental triangle to:		
s_{cn}	Rounded crest of internal thread	...
s_{cs}	Rounded crest of external thread	...
s_{rn}	Rounded root of internal thread	...
s_{rs}	Rounded root of external thread	...
Distance from apex of fundamental triangle to:		
f_{cn}	Flat at crest of internal thread	...
f_{cs}	Flat at crest of external thread	...
f_{rn}	Flat at root of internal thread	...
f_{rs}	Flat at root of external thread	...
Width of:		
F	Flat (general)	...
F_{cn}	Flat at crest of internal thread	...
F_{cs}	Flat at crest of external thread	...
F_{rn}	Flat at root of internal thread	...
F_{rs}	Flat at root of external thread	...

GENERAL NOTE:

(a) See [Figures 2](#) through [12](#).

(b) Refer to ASME B1.7 for latest symbol identification. Greek alphabet is below.

A, α	= Alpha	Z, ζ	= Zeta	Λ , λ	= Lambda	π	= Pi	ϕ , φ	= Phi
B, β	= Beta	H, η	= Eta	M, μ	= Mu	P, ρ	= Rho	X, χ	= Chi
γ , Υ	= Gamma	Θ , θ	= Theta	N, ν	= Nu	Σ , σ	= Sigma	Ψ , ψ	= Psi
Δ , δ	= Delta	I, ι	= Iota	Ξ , ξ	= Xi	T, τ	= Tau	Ω , ω	= Omega
E, ϵ	= Epsilon	K, κ	= Kappa	O, o	= Omicron	Υ , υ	= Upsilon		

NONMANDATORY APPENDIX A TERMINOLOGY AND IDENTIFICATION OF UNIFIED INCH SCREW THREADS

A-1 TERMINOLOGY

All terms relating to screw threads used in this Standard are defined in ASME B1.7.

A-2 IDENTIFICATION

The various unified screw threads covered in ASME B1 standards are compared in [Figure A-1](#) and [Table A-1](#).

Figure A-1
Identification of 60-deg Inch Screw Threads Within the Scope of the ASME B1 Committee

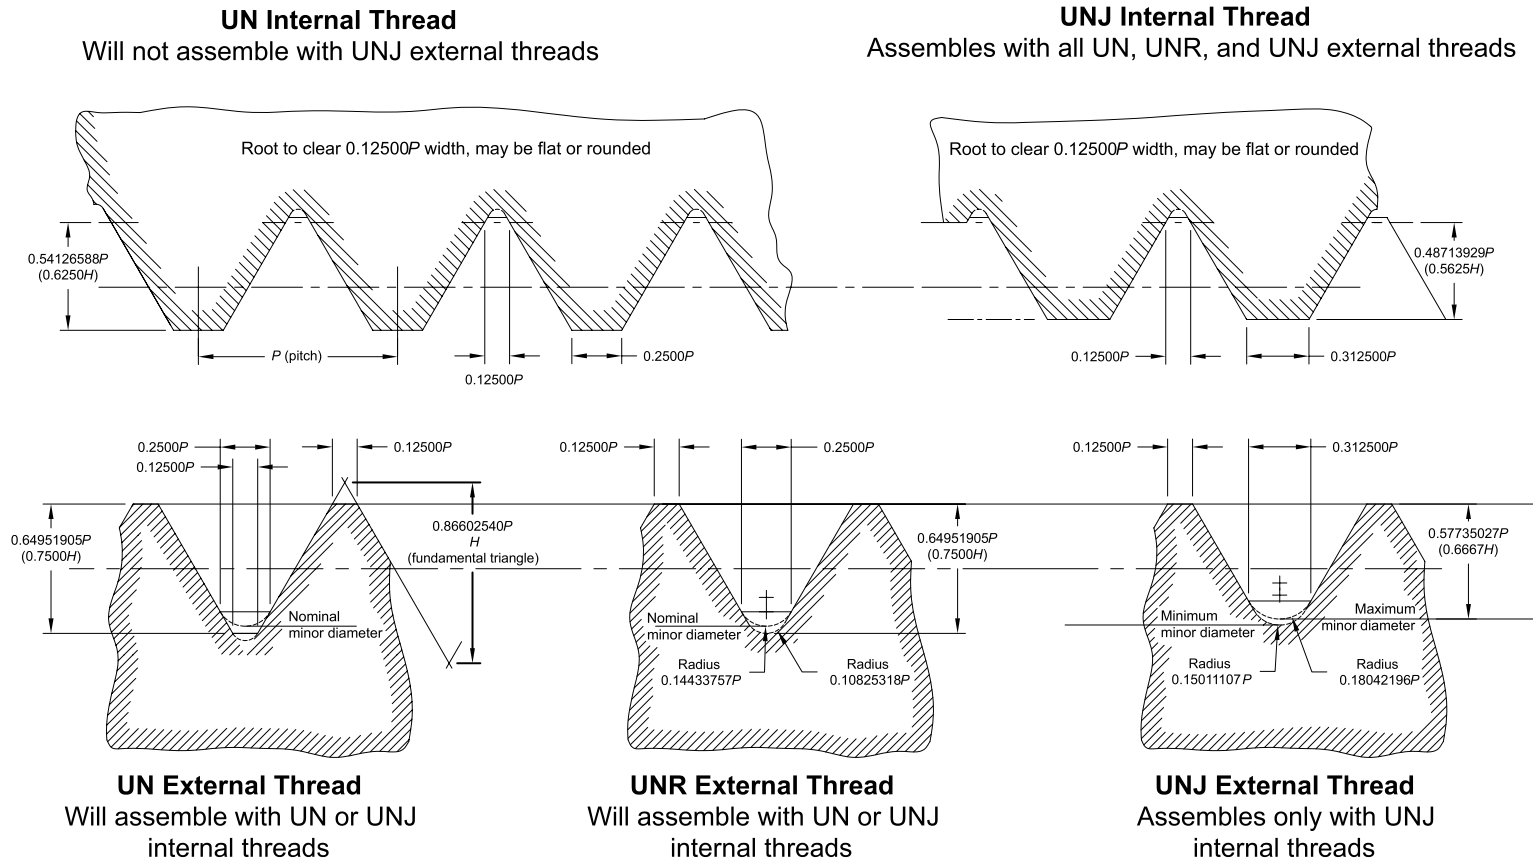


Table A-1
Identification of 60-deg Inch Screw Threads Within the Scope of the ASME B1 Committee

Thread Identification	UN Threads, Internal and External	UNR Threads, External Only	UNJ Threads, Internal and External
ASME standards documents	B1.1, Unified Inch Screw Threads; B1.2, Gages and Gaging for Unified Screw Threads	B1.1, Unified Inch Screw Threads; B1.2, Gages and Gaging for Unified Inch Screw Threads	B1.1, Unified Inch Screw Threads; B1.2, Gages and Gaging for Unified Inch Screw Threads
External root	External thread root may be flat or rounded	Rounded root specified	Rounded root specified
External minor diameter	External thread minor diameter is not given a tolerance	External thread minor diameter is not given a tolerance	External thread minor diameter is given a tolerance
External threads	UN Classes 1A, 2A, and 3A	UNR Classes 1A, 2A, and 3A	UNJ Classes 2A and 3A mate only with UNJ internal threads
Internal threads	UN Classes 1B, 2B, and 3B	No internal threads designated UNR; UNR mates with UN internal threads	UNJ Classes 2B and 3B (no rounding required on internal thread root)

GENERAL NOTES:

- (a) [Table A-1](#) cannot be used as a working sheet. Refer to the appropriate standards, as listed, for complete thread details and conformance data.
- (b) The appropriate current standard is the authoritative document for complete details and data and takes precedence over this table.

NONMANDATORY APPENDIX B

THREAD STRENGTH DESIGN FORMULAS

B-1 THREAD TENSILE STRESS AREA FOR UN, UNR, AND UNJ THREADS

The following thread tensile stress area formulas are used for the purpose of product acceptance computations:

(a) For UN and UNR

$$A_s = 3.1416 \left[\left(\frac{D_2}{2} \right) - \left(0.16237976P \right) \right]^2$$

or

$$A_s = 0.7854 \left[(D) - \left(\frac{0.9743}{(1/P)} \right) \right]^2$$

where

$1/P$ = number of threads per inch

D = basic major diameter

D_2 = basic pitch diameter

For $0.16237976P$, see [Table 5](#).

(b) For UNJ, see applicable UNJ fastener standard such as SAE AS7251C, SAE AS7455A, SAE AS7459B, SAE AS7466E, SAE AS7477F, or SAE AS7478D.

B-2 THREAD SHEAR DATA FOR UN, UNR, AND UNJ THREADS

The following formulas for thread shear areas are geometric minimum values. Shear (thread stripping) strengths of screw threads under load are dependent, in addition, on mating component relative material strengths, nut geometry, and coefficient of friction between thread-bearing surfaces. Effective shear areas are therefore somewhat less than the geometric values.

(a) For UN and UNR

$$\begin{aligned} AS_n &= 3.1416(1/P)(LE)(d_{\min.}) \\ &\quad \times [1/(2(1/P)) + 0.57735 (d_{\min.} - D_{2\max.})] \\ AS_s &= 3.1416 (1/P)(LE)(D_{1\max.}) \\ &\quad \times [1/(2(1/P)) + 0.57735 (d_{2\min.} - D_{1\max.})] \end{aligned}$$

where

$1/P$ = number of threads per inch

AS_n = minimum thread shear area for internal threads

AS_s = minimum thread shear area for external threads

D_1 max. = maximum minor diameter of internal thread

D_2 max. = maximum pitch diameter of internal thread

d min. = minimum major diameter of external thread

d_2 min. = minimum pitch diameter of external thread

LE = length of engagement

(b) For UNJ, see applicable UNJ fastener standard such as SAE AS7251C, SAE AS7455A, SAE AS7459B, SAE AS7466E, SAE AS7477F, or SAE AS7478D.

B-3 LENGTH OF THREAD ENGAGEMENT

In general, the length of engagement of mating threads is selected to utilize full tensile strength of a bolt prior to shearing of nut threads. Other applications may require internal thread shear prior to failure of the externally threaded part. For noncritical design, the following formulas are often used for approximation:

(a) tensile strength of externally threaded part = $S_t A_s$

(b) shear strength of threads = $0.5S_t (AS_n \text{ or } AS_s)$

where

S_t = ultimate tensile strength of material, psi

An internationally accepted study on the subject was published in the 1977 Transactions of the Society of Automotive Engineers as Technical Paper 770420, "Analysis and Design of Threaded Assemblies," by E. M. Alexander.

NONMANDATORY APPENDIX C

UNIFIED INCH SCREW THREADS — METRIC TRANSLATION

The tables that were in this Appendix in the 2003 revision of this Standard have been removed. They were the translation of unified inch screw threads into metric units of measurement. They included the limiting dimensions for UN/UNR and UNS/UNRS series threads and the table of thread form data, translated from inches to millimeters by

multiplying the inch values by 25.4. Their removal was approved by the ASME B1.1 subcommittee during the revision of this document. The reasoning was that the tables had little use and the values can be reproduced when needed.

NONMANDATORY APPENDIX D SPECIAL THREADS

Newly created special thread dimensions shall be determined by use of the formulas in the body of this Standard and the employment of the rounding rules set forth by ASME B1.30.

Existing special thread dimensions developed from previous editions of ASME B1.1 and using rounding rules other than those contained in ASME B1.30 may differ. This includes the UNR minor diameter values listed in [Table D-1](#), which were calculated based on formulas from previous editions of ASME B1.1. Due to a change in constants for their calculations, these values will not be the same as values calculated using the corrected constants.

Previously established special thread dimensions are acceptable for continued use.

This Appendix contains [Table D-1](#) (formerly Table 3B in ASME B1.1-1989), which contains tabulated values for many of the more commonly used nonstandard thread sizes.

Tables D-2 through D-11 (formerly Tables 31 through 40 in ASME B1.1-1989) have been removed. These tables were used in the past to calculate special thread sizes. Their removal was approved by the ASME B1.1 subcommittee during the revision of this document. The reasoning was that the table values are no longer used, but if needed they can be obtained from previous revisions of this document.

Table D-1
Limits of Size for Selected Combinations of UNS/UNRS Series Threads

		External [Note (1)]									Internal [Note (1)]						
		Series Designation	Class	Allowance	Major Diameter		Pitch Diameter and Functional Diameter [Note (3)]			Maximum UNR Minor Diameter [Notes (5), (6)] (Ref.)	Minor Diameter		Pitch Diameter and Functional Diameter [Note (3)]			Miimum Major Diameter	
Nominal Size and Threads/in.	Max. [Note (2)]				Min.	Max. [Note (2)]	Min.	Tolerance [Note (4)]	Class		Min.	Max.	Min.	Max.	Tolerance		
(7)	10 - 28 or 0.1900 - 28	UNS	2A	0.0010	0.1890	0.1825	0.1658	0.1625	0.003339	0.1465	2B	0.151	0.160	0.1668	0.1711	0.0043	0.1900
(7)	10 - 36 or 0.1900 - 36	UNS	2A	0.0009	0.1891	0.1836	0.1711	0.1681	0.002988	0.1560	2B	0.160	0.167	0.1720	0.1759	0.0039	0.1900
(7)	10 - 40 or 0.1900 - 40	UNS	2A	0.0009	0.1891	0.1840	0.1729	0.1700	0.002856	0.1593	2B	0.163	0.169	0.1738	0.1775	0.0037	0.1900
	10 - 48 or 0.1900 - 48	UNS	2A	0.0008	0.1892	0.1847	0.1757	0.1731	0.002648	0.1644	2B	0.167	0.172	0.1765	0.1799	0.0034	0.1900
(7)	10 - 56 or 0.1900 - 56	UNS	2A	0.0007	0.1893	0.1852	0.1777	0.1752	0.002488	0.1680	2B	0.171	0.175	0.1784	0.1816	0.0032	0.1900
(7)	12 - 36 or 0.2160 - 36	UNS	2A	0.0009	0.2151	0.2096	0.1971	0.1941	0.003026	0.1820	2B	0.186	0.193	0.1980	0.2019	0.0039	0.2160
(7)	12 - 40 or 0.2160 - 40	UNS	2A	0.0009	0.2151	0.2100	0.1989	0.1960	0.002894	0.1853	2B	0.189	0.195	0.1998	0.2036	0.0038	0.2160
(7)	12 - 48 or 0.2160 - 48	UNS	2A	0.0008	0.2152	0.2107	0.2017	0.1990	0.002686	0.1904	2B	0.193	0.198	0.2025	0.2060	0.0035	0.2160
(7)	12 - 56 or 0.2160 - 56	UNS	2A	0.0008	0.2152	0.2111	0.2036	0.2011	0.002526	0.1939	2B	0.197	0.201	0.2044	0.2077	0.0033	0.2160
	¼ - 24 or 0.2500 - 24	UNS	2A	0.0011	0.2489	0.2417	0.2218	0.2181	0.003667	0.1993	2B	0.205	0.215	0.2229	0.2277	0.0048	0.2500
	¼ - 27 or 0.2500 - 27	UNS	2A	0.0010	0.2490	0.2423	0.2249	0.2214	0.003478	0.2049	2B	0.210	0.219	0.2259	0.2304	0.0045	0.2500
(7)	¼ - 36 or 0.2500 - 36	UNS	2A	0.0009	0.2491	0.2436	0.2311	0.2280	0.003071	0.2160	2B	0.220	0.227	0.2320	0.2360	0.0040	0.2500
	¼ - 40 or 0.2500 - 40	UNS	2A	0.0009	0.2491	0.2440	0.2329	0.2300	0.002939	0.2193	2B	0.223	0.229	0.2338	0.2376	0.0038	0.2500
(7)	¼ - 48 or 0.2500 - 48	UNS	2A	0.0008	0.2492	0.2447	0.2357	0.2330	0.002731	0.2244	2B	0.227	0.232	0.2365	0.2401	0.0036	0.2500
(7)	¼ - 56 or 0.2500 - 56	UNS	2A	0.0008	0.2492	0.2451	0.2376	0.2350	0.002571	0.2279	2B	0.231	0.235	0.2384	0.2417	0.0033	0.2500
(7)	5/16 -27 or 0.3125-27	UNS	2A	0.0011	0.3114	0.3047	0.2873	0.2837	0.003551	0.2673	2B	0.272	0.281	0.2884	0.2930	0.0046	0.3125
(7)	5/16 -36 or 0.3125-36	UNS	2A	0.0009	0.3116	0.3061	0.2936	0.2905	0.003144	0.2785	2B	0.282	0.289	0.2945	0.2986	0.0041	0.3125

Table D-1
Limits of Size for Selected Combinations of UNS/UNRS Series Threads (Cont'd)

Nominal Size and Threads/in.		Series Designation	External [Note (1)]								Internal [Note (1)]						
			Class	Allowance	Major Diameter		Pitch Diameter and Functional Diameter [Note (3)]			Maximum UNR Minor Diameter [Notes (5), (6)] (Ref.)	Minor Diameter		Pitch Diameter and Functional Diameter [Note (3)]			Mimum Major Diameter	
					Max. [Note (2)]	Min.	Max. [Note (2)]	Min.	Tolerance [Note (4)]		Min.	Max.	Min.	Max.	Tolerance		
(7)	5/16 -40 or 0.3125-40	UNS	2A	0.0009	0.3116	0.3065	0.2954	0.2924	0.003012	0.2818	2B	0.285	0.291	0.2963	0.3002	0.0039	0.3125
(7)	5/16 -48 or 0.3125-48	UNS	2A	0.0008	0.3117	0.3072	0.2982	0.2954	0.002804	0.2869	2B	0.290	0.295	0.2990	0.3026	0.0036	0.3125
(7)	3/8 - 18 or 0.3750 - 18	UNS	2A	0.0013	0.3737	0.3650	0.3376	0.3333	0.004327	0.3075	2B	0.315	0.328	0.3389	0.3445	0.0056	0.3750
	3/8 - 27 or 0.3750 - 27	UNS	2A	0.0011	0.3739	0.3672	0.3498	0.3462	0.003615	0.3298	2B	0.335	0.344	0.3509	0.3556	0.0047	0.3750
	3/8 - 36 or 0.3750 - 36	UNS	2A	0.0010	0.3740	0.3685	0.3560	0.3528	0.003208	0.3409	2B	0.345	0.352	0.3570	0.3612	0.0042	0.3750
	3/8 - 40 or 0.3750 - 40	UNS	2A	0.0009	0.3741	0.3690	0.3579	0.3548	0.003076	0.3443	2B	0.348	0.354	0.3588	0.3628	0.0040	0.3750
	0.390 - 27 or 0.3900 - 27	UNS	2A	0.0011	0.3889	0.3822	0.3648	0.3612	0.003629	0.3448	2B	0.350	0.359	0.3659	0.3706	0.0047	0.3900
(7)	7/16 - 18 or 0.4375-18	UNS	2A	0.0013	0.4362	0.4275	0.4001	0.3957	0.004384	0.3700	2B	0.377	0.390	0.4014	0.4071	0.0057	0.4375
(7)	7/16 - 24 or 0.4375-24	UNS	2A	0.0012	0.4363	0.4291	0.4092	0.4053	0.003861	0.3867	2B	0.392	0.402	0.4104	0.4154	0.0050	0.4375
(7)	7/16 - 27 or 0.4375-27	UNS	2A	0.0011	0.4364	0.4297	0.4123	0.4086	0.003672	0.3923	2B	0.397	0.406	0.4134	0.4182	0.0048	0.4375
(7)	1/2 - 12 or 0.5000 - 12	UNS	2A	0.0016	0.4984	0.4870	0.4443	0.4389	0.005352	0.3992	2B	0.410	0.428	0.4459	0.4529	0.0070	0.5000
(7)		3A	0.0000	0.5000	0.4886	0.4459	0.4419	0.004000	0.4008	3B	0.4100	0.4223	0.4459	0.4511	0.0052	0.5000	
(7)	1/2 - 14 or 0.5000 - 14	UNS	2A	0.0015	0.4985	0.4882	0.4521	0.4471	0.004976	0.4134	2B	0.423	0.438	0.4536	0.4601	0.0065	0.5000
(7)	1/2 - 18 or 0.5000 - 18	UNS	2A	0.0013	0.4987	0.4900	0.4626	0.4582	0.004436	0.4325	2B	0.440	0.453	0.4639	0.4697	0.0058	0.5000
	1/2 - 24 or 0.5000 - 24	UNS	2A	0.0012	0.4988	0.4916	0.4717	0.4678	0.003913	0.4492	2B	0.455	0.465	0.4729	0.4780	0.0051	0.5000
	1/2 - 27 or 0.5000 - 27	UNS	2A	0.0011	0.4989	0.4922	0.4748	0.4711	0.003724	0.4548	2B	0.460	0.469	0.4759	0.4807	0.0048	0.5000

Table D-1
Limits of Size for Selected Combinations of UNS/UNRS Series Threads (Cont'd)

		External [Note (1)]									Internal [Note (1)]						
		Class	Allowance	Major Diameter		Pitch Diameter and Functional Diameter [Note (3)]			Maximum UNR Minor Diameter [Notes (5), (6)] (Ref.)	Minor Diameter		Pitch Diameter and Functional Diameter [Note (3)]			Miimum Major Diameter		
				Max. [Note (2)]	Min.	Max. [Note (2)]	Min.	Tolerance [Note (4)]		Class	Min.	Max.	Min.	Max.		Tolerance	
Nominal Size and Threads/in.	Series Designation																
(7)	9/16 - 14 or 0.5625 - 14	UNS	2A	0.0015	0.5610	0.5507	0.5146	0.5096	0.005023	0.4759	2B	0.485	0.501	0.5161	0.5226	0.0065	0.5625
(7)	9/16 - 27 or 0.5625 - 27	UNS	2A	0.0011	0.5614	0.5547	0.5373	0.5335	0.003771	0.5173	2B	0.522	0.531	0.5384	0.5433	0.0049	0.5625
(7)	5/8 - 14 or 0.6250 - 14	UNS	2A	0.0015	0.6235	0.6132	0.5771	0.5720	0.005067	0.5384	2B	0.548	0.563	0.5786	0.5852	0.0066	0.6250
	5/8 - 27 or 0.6250 - 27	UNS	2A	0.0011	0.6239	0.6172	0.5998	0.5960	0.003815	0.5798	2B	0.585	0.594	0.6009	0.6059	0.0050	0.6250
(7)	3/4 - 14 or 0.7500 - 14	UNS	2A	0.0015	0.7485	0.7382	0.7021	0.6970	0.005148	0.6634	2B	0.673	0.688	0.7036	0.7103	0.0067	0.7500
(7)	3/4 - 18 or 0.7500 - 18	UNS	2A	0.0014	0.7486	0.7399	0.7125	0.7079	0.004608	0.6824	2B	0.690	0.703	0.7139	0.7199	0.0060	0.7500
	3/4 - 24 or 0.7500 - 24	UNS	2A	0.0012	0.7488	0.7416	0.7217	0.7176	0.004085	0.6992	2B	0.705	0.715	0.7229	0.7282	0.0053	0.7500
	3/4 - 27 or 0.7500 - 27	UNS	2A	0.0012	0.7488	0.7421	0.7247	0.7208	0.003896	0.7047	2B	0.710	0.719	0.7259	0.7310	0.0051	0.7500
(7)	7/8 - 10 or 0.8750 - 10	UNS	2A	0.0018	0.8732	0.8603	0.8082	0.8021	0.006090	0.7541	2B	0.767	0.788	0.8100	0.8179	0.0079	0.8750
(7)	7/8 - 18 or 0.8750 - 18	UNS	2A	0.0014	0.8736	0.8649	0.8375	0.8328	0.004680	0.8074	2B	0.815	0.828	0.8389	0.8450	0.0061	0.8750
(7)	7/8 - 24 or 0.8750 - 24	UNS	2A	0.0012	0.8738	0.8666	0.8467	0.8425	0.004157	0.8242	2B	0.830	0.840	0.8479	0.8533	0.0054	0.8750
(7)	7/8 - 27 or 0.8750 - 27	UNS	2A	0.0012	0.8738	0.8671	0.8497	0.8457	0.003968	0.8297	2B	0.835	0.844	0.8509	0.8561	0.0052	0.8750
(7)	1 - 10 or 1.0000 - 10	UNS	2A	0.0018	0.9982	0.9853	0.9332	0.9270	0.006155	0.8791	2B	0.892	0.913	0.9350	0.9430	0.0080	1.0000
(7)	1 - 18 or 1.0000 - 18	UNS	2A	0.0014	0.9986	0.9899	0.9625	0.9578	0.004745	0.9324	2B	0.940	0.953	0.9639	0.9701	0.0062	1.0000
	1 - 24 or 1.0000 - 24	UNS	2A	0.0013	0.9987	0.9915	0.9716	0.9674	0.004222	0.9491	2B	0.955	0.965	0.9729	0.9784	0.0055	1.0000
	1 - 27 or 1.0000 - 27	UNS	2A	0.0012	0.9988	0.9921	0.9747	0.9707	0.004033	0.9547	2B	0.960	0.969	0.9759	0.9811	0.0052	1.0000

Table D-1
Limits of Size for Selected Combinations of UNS/UNRS Series Threads (Cont'd)

		External [Note (1)]									Internal [Note (1)]							
		Class		Allowance		Major Diameter		Pitch Diameter and Functional Diameter [Note (3)]			Maximum UNR Minor Diameter [Notes (5), (6)] (Ref.)		Minor Diameter		Pitch Diameter and Functional Diameter [Note (3)]			Mimum Major Diameter
Nominal Size and Threads/in.	Series Designation				Max. [Note (2)]	Min.		Max. [Note (2)]	Min.	Tolerance [Note (4)]								
(7)	1 ¹ / ₈ - 10 or 1.1250 - 10	UNS	2A	0.0019	1.1231	1.1102		1.0581	1.0519	0.006215	1.0040	2B	1.017	1.038	1.0600	1.0681	0.0081	1.1250
(7)	1 ¹ / ₈ - 14 or 1.1250 - 14	UNS	2A	0.0016	1.1234	1.1131		1.0770	1.0717	0.005345	1.0383	2B	1.048	1.063	1.0786	1.0855	0.0069	1.1250
(7)	1 ¹ / ₈ - 24 or 1.1250 - 24	UNS	2A	0.0013	1.1237	1.1165		1.0966	1.0923	0.004282	1.0741	2B	1.080	1.090	1.0979	1.1035	0.0056	1.1250
(7)	1 ¹ / ₄ - 10 or 1.2500 - 10	UNS	2A	0.0019	1.2481	1.2352		1.1831	1.1768	0.006271	1.1290	2B	1.142	1.163	1.1850	1.1932	0.0082	1.2500
(7)	1 ¹ / ₄ - 14 or 1.2500 - 14	UNS	2A	0.0016	1.2484	1.2381		1.2020	1.1966	0.005401	1.1633	2B	1.173	1.188	1.2036	1.2106	0.0070	1.2500
	1 ¹ / ₄ - 24 or 1.2500 - 24	UNS	2A	0.0013	1.2487	1.2415		1.2216	1.2173	0.004338	1.1991	2B	1.205	1.215	1.2229	1.2285	0.0056	1.2500
(7)	1 ³ / ₈ - 10 or 1.3750 - 10	UNS	2A	0.0019	1.3731	1.3602		1.3081	1.3018	0.006323	1.2540	2B	1.267	1.288	1.3100	1.3182	0.0082	1.3750
(7)	1 ³ / ₈ - 14 or 1.3750 - 14	UNS	2A	0.0016	1.3734	1.3631		1.3270	1.3215	0.005453	1.2883	2B	1.298	1.313	1.3286	1.3357	0.0071	1.3750
(7)	1 ³ / ₈ - 24 or 1.3750 - 24	UNS	2A	0.0013	1.3737	1.3665		1.3466	1.3422	0.004390	1.3241	2B	1.330	1.340	1.3479	1.3536	0.0057	1.3750
(7)	1 ¹ / ₂ - 10 or 1.5000 - 10	UNS	2A	0.0019	1.4981	1.4852		1.4331	1.4267	0.006372	1.3790	2B	1.392	1.413	1.4350	1.4433	0.0083	1.5000
(7)	1 ¹ / ₂ - 14 or 1.5000 - 14	UNS	2A	0.0017	1.4983	1.4880		1.4519	1.4464	0.005502	1.4132	2B	1.423	1.438	1.4536	1.4608	0.0072	1.5000
	1 ¹ / ₂ - 24 or 1.5000 - 24	UNS	2A	0.0013	1.4987	1.4915		1.4716	1.4672	0.004439	1.4491	2B	1.455	1.465	1.4729	1.4787	0.0058	1.5000
(7)	1 ⁵ / ₈ - 10 or 1.6250 - 10	UNS	2A	0.0019	1.6231	1.6102		1.5581	1.5517	0.006419	1.5040	2B	1.517	1.538	1.5600	1.5683	0.0083	1.6250
(7)	1 ⁵ / ₈ - 14 or 1.6250 - 14	UNS	2A	0.0017	1.6233	1.6130		1.5769	1.5714	0.005549	1.5382	2B	1.548	1.563	1.5786	1.5858	0.0072	1.6250
(7)	1 ⁵ / ₈ - 24 or 1.6250 - 24	UNS	2A	0.0013	1.6237	1.6165		1.5966	1.5921	0.004486	1.5741	2B	1.580	1.590	1.5979	1.6037	0.0058	1.6250
(7)	1 ³ / ₄ - 10 or 1.7500 - 10	UNS	2A	0.0019	1.7481	1.7352		1.6831	1.6766	0.006463	1.6290	2B	1.642	1.663	1.6850	1.6934	0.0084	1.7500
	1 ³ / ₄ - 14 or 1.7500 - 14	UNS	2A	0.0017	1.7483	1.7380		1.7019	1.6963	0.005593	1.6632	2B	1.673	1.688	1.7036	1.7109	0.0073	1.7500

Table D-1
Limits of Size for Selected Combinations of UNS/UNRS Series Threads (Cont'd)

Nominal Size and Threads/in.		Series Designation	External [Note (1)]								Internal [Note (1)]						Mimum Major Diameter
			Class	Allowance	Major Diameter		Pitch Diameter and Functional Diameter [Note (3)]		Maximum UNR Minor Diameter [Notes (5), (6)] (Ref.)	Minor Diameter		Pitch Diameter and Functional Diameter [Note (3)]					
					Max. [Note (2)]	Min.	Max. [Note (2)]	Min.		Tolerance [Note (4)]	Class	Min.	Max.	Min.	Max.	Tolerance	
[7]	1 ³ / ₄ - 18 or 1.7500 - 18	UNS	2A	0.0015	1.7485	1.7398	1.7124	1.7073	0.005053	1.6823	2B	1.690	1.703	1.7139	1.7205	0.0066	1.7500
[7]	1 ⁷ / ₈ - 10 or 1.8750 - 10	UNS	2A	0.0020	1.8730	1.8601	1.8080	1.8015	0.006505	1.7539	2B	1.767	1.788	1.8100	1.8185	0.0085	1.8750
[7]	1 ⁷ / ₈ - 14 or 1.8750 - 14	UNS	2A	0.0017	1.8733	1.8630	1.8269	1.8213	0.005635	1.7882	2B	1.798	1.813	1.8286	1.8359	0.0073	1.8750
[7]	1 ⁷ / ₈ - 18 or 1.8750 - 18	UNS	2A	0.0015	1.8735	1.8648	1.8374	1.8323	0.005095	1.8073	2B	1.815	1.828	1.8389	1.8455	0.0066	1.8750
[7]	2 - 10 or 2.0000 - 10	UNS	2A	0.0020	1.9980	1.9851	1.9330	1.9265	0.006545	1.8789	2B	1.892	1.913	1.9350	1.9435	0.0085	2.0000
[7]	2 - 14 or 2.0000 - 14	UNS	2A	0.0017	1.9983	1.9880	1.9519	1.9462	0.005675	1.9132	2B	1.923	1.938	1.9536	1.9610	0.0074	2.0000
[7]	2 - 18 or 2.0000 - 18	UNS	2A	0.0015	1.9985	1.9898	1.9624	1.9573	0.005135	1.9323	2B	1.940	1.953	1.9639	1.9706	0.0067	2.0000
[7]	2 ¹ / ₁₆ - 16 or 2.0630 - 16	UNS	2A	0.0016	2.0609	2.0515	2.0203	2.0149	0.005396	1.9865	2B	1.995	2.009	2.0219	2.0289	0.0070	2.0625
[7]			3A	0.0000	2.0625	2.0531	2.0219	2.0179	0.004000	1.9881	3B	1.9950	2.0034	2.0219	2.0272	0.0053	2.0625
[7]	2 ³ / ₁₆ - 16 or 2.1875 - 16	UNS	2A	0.0016	2.1859	2.1765	2.1453	2.1399	0.005434	2.1115	2B	2.120	2.134	2.1469	2.1540	0.0071	2.1875
[7]			3A	0.0000	2.1875	2.1781	2.1469	2.1428	0.004100	2.1131	3B	2.1200	2.1284	2.1469	2.1522	0.0053	2.1875
[7]	2 ¹ / ₄ - 10 or 2.2500 - 10	UNS	2A	0.0020	2.2480	2.2351	2.1830	2.1764	0.006621	2.1289	2B	2.142	2.163	2.1850	2.1936	0.0086	2.2500
[7]	2 ¹ / ₄ - 14 or 2.2500 - 14	UNS	2A	0.0017	2.2483	2.2380	2.2019	2.1961	0.005751	2.1632	2B	2.173	2.188	2.2036	2.2111	0.0075	2.2500
[7]	2 ¹ / ₄ - 18 or 2.2500 - 18	UNS	2A	0.0016	2.2484	2.2397	2.2123	2.2071	0.005211	2.1822	2B	2.190	2.203	2.2139	2.2207	0.0068	2.2500
[7]	2 ⁵ / ₁₆ - 16 or 2.3125 - 16	UNS	2A	0.0016	2.3109	2.3015	2.2703	2.2648	0.005471	2.2365	2B	2.245	2.259	2.2719	2.2790	0.0071	2.3125
[7]			3A	0.0000	2.3125	2.3031	2.2719	2.2678	0.004100	2.2381	3B	2.2450	2.2534	2.2719	2.2772	0.0053	2.3125
[7]	2 ⁷ / ₁₆ - 16 or 2.4375 - 16	UNS	2A	0.0017	2.4358	2.4264	2.3952	2.3897	0.005506	2.3614	2B	2.370	2.384	2.3969	2.4041	0.0072	2.4375
[7]			3A	0.0000	2.4375	2.4281	2.3969	2.3928	0.004100	2.3631	3B	2.3700	2.3784	2.3969	2.4023	0.0054	2.4375

Table D-1
Limits of Size for Selected Combinations of UNS/UNRS Series Threads (Cont'd)

		External [Note (1)]									Internal [Note (1)]						
		Class	Allowance	Major Diameter		Pitch Diameter and Functional Diameter [Note (3)]			Maximum UNR Minor Diameter [Notes (5), (6)] (Ref.)	Class	Minor Diameter		Pitch Diameter and Functional Diameter [Note (3)]			Mimum Major Diameter	
Nominal Size and Threads/in.	Series Designation			Max. [Note (2)]	Min.	Max. [Note (2)]	Min.	Tolerance [Note (4)]			Min.	Max.	Tolerance				
(7)	2½ - 10 or 2.5000 - 10	UNS	2A	0.0020	2.4980	2.4851	2.4330	2.4263	0.006691	2.3789	2B	2.392	2.413	2.4350	2.4437	0.0087	2.5000
(7)	2½ - 14 or 2.5000 - 14	UNS	2A	0.0017	2.4983	2.4880	2.4519	2.4461	0.005821	2.4132	2B	2.423	2.438	2.4536	2.4612	0.0076	2.5000
(7)	2½ - 18 or 2.5000 - 18	UNS	2A	0.0016	2.4984	2.4897	2.4623	2.4570	0.005281	2.4322	2B	2.440	2.453	2.4639	2.4708	0.0069	2.5000
(7)	2¾ - 10 or 2.7500 - 10	UNS	2A	0.0020	2.7480	2.7351	2.6830	2.6762	0.006757	2.6289	2B	2.642	2.663	2.6850	2.6938	0.0088	2.7500
(7)	2¾ - 14 or 2.7500 - 14	UNS	2A	0.0018	2.7482	2.7379	2.7018	2.6959	0.005887	2.6631	2B	2.673	2.688	2.7036	2.7113	0.0077	2.7500
(7)	2¾ - 18 or 2.7500 - 18	UNS	2A	0.0016	2.7484	2.7397	2.7123	2.7070	0.005347	2.6822	2B	2.690	2.703	2.7139	2.7209	0.0070	2.7500
(7)	3 - 10 or 3.0000 - 10	UNS	2A	0.0020	2.9980	2.9851	2.9330	2.9262	0.006818	2.8789	2B	2.892	2.913	2.9350	2.9439	0.0089	3.0000
(7)	3 - 14 or 3.0000 - 14	UNS	2A	0.0018	2.9982	2.9879	2.9518	2.9459	0.005948	2.9131	2B	2.923	2.938	2.9536	2.9613	0.0077	3.0000
(7)	3 - 18 or 3.0000 - 18	UNS	2A	0.0016	2.9984	2.9897	2.9623	2.9569	0.005408	2.9322	2B	2.940	2.953	2.9639	2.9709	0.0070	3.0000
(7)	3¼ - 10 or 3.2500 - 10	UNS	2A	0.0021	3.2479	3.2350	3.1829	3.1760	0.006877	3.1288	2B	3.142	3.163	3.1850	3.1939	0.0089	3.2500
(7)	3¼ - 14 or 3.2500 - 14	UNS	2A	0.0018	3.2482	3.2379	3.2018	3.1958	0.006007	3.1631	2B	3.173	3.188	3.2036	3.2114	0.0078	3.2500
(7)	3¼ - 18 or 3.2500 - 18	UNS	2A	0.0016	3.2484	3.2397	3.2123	3.2068	0.005467	3.1822	2B	3.190	3.203	3.2139	3.2210	0.0071	3.2500
(7)	3½ - 10 or 3.5000 - 10	UNS	2A	0.0021	3.4979	3.4850	3.4329	3.4260	0.006932	3.3788	2B	3.392	3.413	3.4350	3.4440	0.0090	3.5000
(7)	3½ - 14 or 3.5000 - 14	UNS	2A	0.0018	3.4982	3.4879	3.4518	3.4457	0.006062	3.4131	2B	3.423	3.438	3.4536	3.4615	0.0079	3.5000
(7)	3½ - 18 or 3.5000 - 18	UNS	2A	0.0017	3.4983	3.4896	3.4622	3.4567	0.005522	3.4321	2B	3.440	3.453	3.4639	3.4711	0.0072	3.5000
(7)	3¾ - 10 or 3.7500 - 10	UNS	2A	0.0021	3.7479	3.7350	3.6829	3.6759	0.006985	3.6288	2B	3.642	3.663	3.6850	3.6941	0.0091	3.7500
(7)	3¾ - 14 or 3.7500 - 14	UNS	2A	0.0018	3.7482	3.7379	3.7018	3.6957	0.006115	3.6631	2B	3.673	3.688	3.7036	3.7115	0.0079	3.7500

Table D-1
Limits of Size for Selected Combinations of UNS/UNRS Series Threads (Cont'd)

Nominal Size and Threads/in.		Series Designation	External [Note (1)]								Internal [Note (1)]							Miimum Major Diameter
			Class	Allowance	Major Diameter		Pitch Diameter and Functional Diameter [Note (3)]		Maximum UNR Minor Diameter [Notes (5), (6)] (Ref.)	Minor Diameter		Pitch Diameter and Functional Diameter [Note (3)]						
					Max. [Note (2)]	Min.	Max. [Note (2)]	Min.		Tolerance [Note (4)]	Class	Min.	Max.	Min.	Max.	Tolerance		
[7]	3¾ - 18 or 3.7500 - 18	UNS	2A	0.0017	3.7483	3.7396	3.7122	3.7066	0.005575	3.6821	2B	3.690	3.703	3.7139	3.7211	0.0072	3.7500	
[7]	4 - 10 or 4.0000 - 10	UNS	2A	0.0021	3.9979	3.9850	3.9329	3.9259	0.007036	3.8788	2B	3.892	3.913	3.9350	3.9441	0.0091	4.0000	
[7]	4 - 14 or 4.0000 - 14	UNS	2A	0.0018	3.9982	3.9879	3.9518	3.9456	0.006166	3.9131	2B	3.923	3.938	3.9536	3.9616	0.0080	4.0000	
[7]	4¼ - 10 or 4.2500 - 10	UNS	2A	0.0021	4.2479	4.2350	4.1829	4.1758	0.007085	4.1288	2B	4.142	4.163	4.1850	4.1942	0.0092	4.2500	
[7]	4¼ - 14 or 4.2500 - 14	UNS	2A	0.0019	4.2481	4.2378	4.2017	4.1955	0.006215	4.1630	2B	4.173	4.188	4.2036	4.2117	0.0081	4.2500	
[7]	4½ - 10 or 4.5000 - 10	UNS	2A	0.0021	4.4979	4.4850	4.4329	4.4258	0.007131	4.3788	2B	4.392	4.413	4.4350	4.4443	0.0093	4.5000	
[7]	4½ - 14 or 4.5000 - 14	UNS	2A	0.0019	4.4981	4.4878	4.4517	4.4454	0.006261	4.4130	2B	4.423	4.438	4.4536	4.4617	0.0081	4.5000	
[7]	4¾ - 10 or 4.7500 - 10	UNS	2A	0.0022	4.7478	4.7349	4.6828	4.6756	0.007176	4.6287	2B	4.642	4.663	4.6850	4.6943	0.0093	4.7500	
[7]	4¾ - 14 or 4.7500 - 14	UNS	2A	0.0019	4.7481	4.7378	4.7017	4.6954	0.006306	4.6630	2B	4.673	4.688	4.7036	4.7118	0.0082	4.7500	
[7]	5 - 10 or 5.0000 - 10	UNS	2A	0.0022	4.9978	4.9849	4.9328	4.9256	0.007220	4.8787	2B	4.892	4.913	4.9350	4.9444	0.0094	5.0000	
[7]	5 - 14 or 5.0000 - 14	UNS	2A	0.0019	4.9981	4.9878	4.9517	4.9454	0.006350	4.9130	2B	4.923	4.938	4.9536	4.9619	0.0083	5.0000	
[7]	5¼ - 10 or 5.2500 - 10	UNS	2A	0.0022	5.2478	5.2349	5.1828	5.1755	0.007262	5.1287	2B	5.142	5.163	5.1850	5.1944	0.0094	5.2500	
[7]	5¼ - 14 or 5.2500 - 14	UNS	2A	0.0019	5.2481	5.2378	5.2017	5.1953	0.006392	5.1630	2B	5.173	5.188	5.2036	5.2119	0.0083	5.2500	
[7]	5½ - 10 or 5.5000 - 10	UNS	2A	0.0022	5.4978	5.4849	5.4328	5.4255	0.007303	5.3787	2B	5.392	5.413	5.4350	5.4445	0.0095	5.5000	
[7]	5½ - 14 or 5.5000 - 14	UNS	2A	0.0019	5.4981	5.4878	5.4517	5.4453	0.006433	5.4130	2B	5.423	5.438	5.4536	5.4620	0.0084	5.5000	
[7]	5¾ - 10 or 5.7500 - 10	UNS	2A	0.0022	5.7478	5.7349	5.6828	5.6755	0.007342	5.6287	2B	5.642	5.663	5.6850	5.6945	0.0095	5.7500	

Table D-1
Limits of Size for Selected Combinations of UNS/UNRS Series Threads (Cont'd)

External [Note (1)]											Internal [Note (1)]						
Nominal Size and Threads/in.		Series Designation	Class	Allowance	Major Diameter		Pitch Diameter and Functional Diameter [Note (3)]			Maximum UNR Minor Diameter [Notes (5), (6)] (Ref.)	Class	Minor Diameter		Pitch Diameter and Functional Diameter [Note (3)]			Miiimum Major Diameter
					Max. [Note (2)]	Min.	Max. [Note (2)]	Min.	Tolerance [Note (4)]			Min.	Max.	Min.	Max.	Tolerance	
(7)	5 ³ / ₄ - 14 or 5.7500 - 14	UNS	2A	0.0019	5.7481	5.7378	5.7017	5.6952	0.006472	5.6630	2B	5.673	5.688	5.7036	5.7120	0.0084	5.7500
(7)	6 - 10 or 6.0000 - 10	UNS	2A	0.0022	5.9978	5.9849	5.9328	5.9254	0.007381	5.8787	2B	5.892	5.913	5.9350	5.9446	0.0096	6.0000
(7)	6 - 14 or 6.0000 - 14	UNS	2A	0.0020	5.9980	5.9877	5.9516	5.9451	0.006511	5.9129	2B	5.923	5.938	5.9536	5.9621	0.0085	6.0000

GENERAL NOTE: Series designation shown indicates the UN thread form; however, the UNR thread form may be specified by substituting UNR in place of UN in all designations for external use only.

NOTES:

- (1) Thread classes may be combined. See [para. 4.1](#).
- (2) For Class 2A threads having an additive finish, the maximum major and pitch diameters, after coating, may equal the basic sizes, whose values are the same as the nominal major diameter and the minimum pitch diameter shown for Class 2B, respectively. See [para. 4.1.2](#).
- (3) See [para. 5.2.1](#) for functional diameter.
- (4) 2A pitch diameter tolerance (Td_2) is listed and used to a six-place decimal to calculate the listed Class 1A/1B, 2B, 3A/3B tolerances, Class 1A/2A allowances, and all dimensional limits that depend on them.
- (5) UN series external thread maximum minor diameter is basic [D_1 bsc in [para. 8.3.1\(e\)\(1\)\(-b\)](#)] for Class 3A and basic minus allowance [D_1 bsc - es in [para. 8.3.1\(e\)\(1\)\(-a\)](#)] for Classes 1A and 2A.
- (6) The UNR minor diameter values listed were calculated based on formulas from previous editions of ASME B1.1. Due to a change in constants for calculations, these values will not be the same as values calculated using the corrected constants.
- (7) One or more of the numbers listed in this row have been changed to correct for calculation errors and a change in rounding methods. The original numbers from past issues of this Standard are listed in [Nonmandatory Appendix E](#) and are for reference only.

NONMANDATORY APPENDIX E

CHANGES TO ASME B1.1-1989, TABLES 3A AND 3B

This Appendix contains [Tables E-1](#) and [E-2](#), which show the thread sizes that were listed in Tables 3A and 3B, respectively, in 1989 and earlier editions of ASME B1.1. Those areas in which no data are listed are identical to data in [Tables 2A, 2B](#), and [D-1](#).

The UNR minor diameter values listed in [Table E-2](#) were calculated based on formulas from previous editions of ASME B1.1. Due to a change in constants for their calculations, these values will not be the same as values calculated using the corrected constants.

Table E-1
Limits of Size for Standard Series Internal and External Threads as Listed in Table 3A of ASME B1.1-1989

Nominal Size and Threads/in.	Series Designation	Class	Allowance	External							Internal						
				Major Diameter			Pitch Diameter and Functional Diameter [Note (1)]			Maximum UNR Minor Diameter (Ref.)	Minor Diameter			Pitch Diameter and Func- tional Diameter [Note (1)]			Minimum Major Diameter
				Max.	Min.	Min.	Max.	Min.	Toler- ance		Class	Min.	Max.	Min.	Max.	Toler- ance	
176	UNC	2A	...	...	...	...	...	...	...	...	2B	...	0.0623	...		...	...
		3A	...	...	...	...	...	...	...	...	3B	...	0.0623	...		...	...
	UNF	2A	...	...	...	...	...	...	...	...	2B	...	0.0635	...		...	...
		3A	...	...	...	...	...	...	...	...	3B	...	0.0635	...		...	...
	UNF	2A	...	...	...	...	...	...	...	...	2B	...	0.0753	...		...	...
		3A	...	...	...	...	...	...	...	...	3B	...	0.0753	...		...	...
	6 - 32 or 0.1380 - 32	UNC	3A	...	...	...	...	...	...	...	3B	...	0.1140	...		...	...
	8 - 32 or 0.1640 - 32	UNC	3A	...	...	...	...	...	...	...	3B	...	0.1389	...		...	...
	10 - 24 or 0.1900 - 24	UNC	2A	...	...	...	...	...	...	...	2B	...	0.156	...		...	...
	12 - 32 or 0.2160 - 32	UNEF	2A	0.0009	0.2151	0.2091	...	0.1948	0.1917	0.0031	2B	...	...	...		...	...
	$\frac{5}{16}$ - 20 or 0.3125 - 20	2A	...	...	...	...	...	0.2748	0.0040	...	2B	...	...	...	0.2852	0.0052	...
		3A	...	...	...	...	...	...	...	...	3B	...	...	...	0.2839	0.0039	...
	$\frac{5}{16}$ - 28 or 0.3125 - 28	2A	...	...	...	...	...	0.2849	0.0034	...	2B	...	...	...	0.2937	0.0044	...
		3A	...	...	...	...	...	...	...	...	3B	...	...	...	0.2926	0.0033	...
	$\frac{5}{16}$ - 32 or 0.3125 - 32	2A	...	...	...	...	...	0.2880	0.0032	...	2B	...	...	...	0.2964	0.0042	...
		3A	...	...	...	...	...	0.2898	0.0024	...	3B	...	0.2847	...	0.2953	0.0031	...
	$\frac{7}{16}$ - 16 or 0.4375 - 16	2A	...	...	...	...	...	...	...	...	2B	...	...	...	0.4028	0.0059	...
		3A	...	...	...	...	...	0.3935	0.0034	...	3B	...	...	...		...	...
	$\frac{7}{16}$ - 20 or 0.4375 - 20	UNF	1A	...	...	...	...	0.3975	0.0062	...	1B	...	...	...		...	...
	$\frac{7}{16}$ - 28 or 0.4375 - 28	UNEF	2A	...	...	...	...	...	...	...	2B	...	...	...	0.4189	0.0046	...
	$\frac{7}{16}$ - 32 or 0.4375 - 32	UN	3A	...	...	...	...	0.4147	0.0025	...	3B	...	...	...		...	...
	$\frac{1}{2}$ - 16 or 0.5000 - 16	UN	3A	...	...	...	...	...	...	...	3B	...	0.4419	...		...	...
	$\frac{7}{16}$ - 16 or 0.5625 - 16	UN	3A	...	...	...	...	...	...	...	3B	...	0.5040	...		...	...
	$\frac{9}{16}$ - 20 or 0.5625 - 20	2A	...	...	...	...	...	0.5245	0.0042	...	2B	...	...	...	0.5355	0.0055	...
		3A	...	...	...	...	...	...	...	...	3B	...	0.5162	...	0.5341	0.0041	...
	$\frac{9}{16}$ - 24 or 0.5625 - 24	2A	...	...	...	...	...	0.5303	0.0039	...	2B	...	...	...	...	...	...
		3A	...	...	...	...	...	0.5325	0.0029	...	3B	...	...	...	0.5392	0.0038	...

Table E-1
Limits of Size for Standard Series Internal and External Threads as Listed in Table 3A of ASME B1.1-1989 (Cont'd)

Nominal Size and Threads/in.	Series Designation	Class	Allowance	External							Internal						
				Major Diameter			Pitch Diameter and Functional Diameter [Note (1)]			Maximum UNR Minor Diameter (Ref.)	Minor Diameter		Pitch Diameter and Func- tional Diameter [Note (1)]			Minimum Major Diameter	
Max.	Min.	Min.	Max.	Min.	Toler- ance	Class	Min.	Max.	Min.	Max.	Toler- ance						
9/16 - 32 or 0.5625 - 32	UN	2A	0.0010	0.5615	0.5555	...	0.5412	0.5377	...	...	2B	...	...	...	0.5467	0.0045	...
5/8 - 11 or 0.6250 - 11	UNC	1A	0.0016	0.6234	0.6052	0.5644	0.5561	...	...	...	1B	...	...	...	...	...	...
		2A	0.0016	0.6234	0.6113	...	0.5644	0.5589	...	...	2B	...	...	...	...	...	...
5/8 - 32 or 0.6250 - 32	UN	2A	...	...	...	...	...	...	...	...	2B	...	0.590	...	...	...	...
11/16 - 12 or 0.6875 - 12	UN	2A	...	...	...	...	...	0.6264	0.0054	...	2B	...	...	...	...	...	...
11/16 - 16 or 0.6875 - 16	UN	2A	...	...	...	...	...	...	...	...	2B	...	...	...	0.6531	0.0062	...
11/16 - 20 or 0.6875 - 20	UN	2A	...	...	...	...	...	0.6494	0.0043	...	2B	...	...	...	0.6606	0.0056	...
		3A	...	...	...	...	...	0.6518	0.0032	...	3B	...	0.6412	...	0.6592	0.0042	...
11/16 - 24 or 0.6875 - 24	UNEF	2A	...	...	...	...	...	...	...	...	2B	...	...	...	0.6656	0.0052	...
11/16 - 28 or 0.6875 - 28	UN	3A	...	...	...	...	...	0.6615	0.0028	...	3B	...	...	...	...	...	...
11/16 - 32 or 0.6875 - 32	UN	2A	...	...	...	...	...	...	...	...	2B	...	...	...	0.6718	0.0046	...
3/4 - 16 or 0.7500 - 16	UNF	3A	...	...	...	...	...	...	...	...	3B	...	0.6908	...	...	...	...
3/4 - 20 or 0.7500 - 20	UNEF	3A	...	...	...	...	...	...	...	...	3B	...	0.7037	...	...	...	...
3/4 - 28 or 0.7500 - 28	UN	3A	...	...	...	...	...	...	...	0.7074	3B	...	...	...	...	...	...
		3A	...	...	...	...	...	0.7512	0.0055	...	2B	...	...	...	...	...	...
13/16 - 12 or 0.8125 - 12	UN	3A	...	...	...	...	...	0.7543	0.0041	...	3B	...	...	...	...	...	...
		2A	...	...	...	...	...	...	...	...	2B	...	...	...	0.7782	0.0063	...
13/16 - 16 or 0.8125 - 16	UN	3A	...	...	...	...	...	0.7683	0.0036	...	3B	...	0.7533	...	...	0.0047	...
		2A	...	...	...	...	...	...	...	...	2B	...	...	...	0.7857	0.0057	...
13/16 - 20 or 0.8125 - 20	UNEF	3A	...	...	...	...	...	...	...	...	3B	...	0.7662	...	...	...	...
		2A	...	...	...	...	...	0.7843	0.0038	...	2B	...	...	...	...	...	...
13/16 - 28 or 0.8125 - 28	UN	3A	...	...	...	...	...	...	...	...	3B	...	...	...	0.7930	0.0037	...
		2A	...	...	...	...	...	0.7875	0.0036	...	2B	...	...	...	0.7969	0.0047	...
13/16 - 32 or 0.8125 - 32	UN	3A	...	...	...	...	...	0.7895	0.0027	...	3B	...	...	...	...	...	...
		2A	...	...	...	...	...	0.8137	0.0055	...	2B	...	...	...	0.8281	0.0072	...
7/8 - 12 or 0.8750 - 12	UN	3A	...	...	...	...	...	0.8168	...	...	3B	...	0.7948	...	0.8263	0.0054	...

Table E-1
Limits of Size for Standard Series Internal and External Threads as Listed in Table 3A of ASME B1.1-1989 (Cont'd)

Nominal Size and Threads/in.	Series Designation	Class	Allowance	External							Internal						
				Major Diameter			Pitch Diameter and Functional Diameter [Note (1)]			Maximum UNR Minor Diameter (Ref.)	Minor Diameter			Pitch Diameter and Func- tional Diameter [Note (1)]			Minimum Major Diameter
				Max.	Min.	Min.	Max.	Min.	Toler- ance		Class	Min.	Max.	Min.	Max.	Toler- ance	
$\frac{7}{8}$ - 14 or 0.8750 - 14	UNF	1A	...	...	...	...	...	...	...	...	1B	...	0.814	...	...	...	...
		2A	...	...	...	...	...	...	...	...	2B	...	0.814	...	...	...	...
		3A	...	...	...	...	...	...	...	...	3B	...	0.8068	...	...	...	...
$\frac{7}{8}$ - 16 or 0.8750 - 16	UN	2A	...	...	...	...	...	...	...	...	2B	...	...	...	0.8407	0.0063	...
		3A	...	...	...	...	...	0.8308	0.0036	...	3B	...	0.8158	...	0.8391	0.0047	...
$\frac{7}{8}$ - 20 or 0.8750 - 20	UNEF	2A	...	...	...	...	...	0.8368	0.0044	...	2B	...	...	...	0.8482	0.0057	...
		3A	...	...	...	...	...	0.8392	0.0033	...	3B	...	0.8287	...	0.8468	0.0043	...
$\frac{7}{8}$ - 28 or 0.8750 - 28	UN	2A	...	...	...	...	...	0.8468	0.0038	...	2B	...	...	...	0.8568	0.0050	...
		3A	...	...	...	...	...	...	...	...	3B	...	...	...	0.8555	0.0037	...
$\frac{7}{8}$ - 32 or 0.8750 - 32	UN	2A	...	...	...	...	...	0.8500	0.0036	...	2B	...	...	...	0.8594	0.0047	...
		3A	...	...	...	...	...	0.8520	0.0027	...	3B	...	...	...	...	...	...
$\frac{15}{16}$ - 12 or 0.9375 - 12	UN	2A	...	...	...	...	...	0.8760	0.0057	...	2B	...	...	...	0.8908	0.0074	...
		3A	...	...	...	...	...	0.8793	0.0041	...	3B	...	...	...	...	...	...
$\frac{15}{16}$ - 16 or 0.9375 - 16	UN	2A	...	...	...	...	...	...	...	...	2B	...	...	...	0.9034	0.0065	...
		3A	...	...	...	...	...	...	...	...	3B	...	0.8783	...	0.9018	0.0049	...
$\frac{15}{16}$ - 20 or 0.9375 - 20	UNEF	3A	...	...	...	...	...	...	...	...	3B	...	0.8912	...	...	...	...
$\frac{15}{16}$ - 28 or 0.9375 - 28	UN	2A	...	...	...	...	...	0.9091	0.0040	...	2B	...	...	...	0.9195	0.0052	...
		3A	...	...	...	...	...	...	...	...	3B	...	...	...	0.9182	0.0039	...
1 - 8 or 1.0000 - 8	UNC	2A	...	...	...	...	...	0.9100	...	...	2B	...	...	...	...	...	...
1 - 14 or 1.0000 - 14	UNS	2A	0.0017	0.9983	0.9880	...	0.9519	0.9463	0.0056	...	2B	...	...	...	0.9609	0.0073	...
		3A	...	...	...	...	...	0.9494	0.0042	...	3B	...	...	...	0.9590	0.0054	...
$1\frac{1}{16}$ - 12 or 1.0625 - 12	UN	3A	...	...	...	...	...	1.0042	0.0042	...	3B	...	...	...	...	...	...
$1\frac{1}{16}$ - 16 or 1.0625 - 16	UN	3A	...	...	...	...	...	1.0182	0.0037	...	3B	...	1.0033	...	...	...	...
$1\frac{1}{16}$ - 18 or 1.0625 - 18	UNEF	2A	...	...	...	...	...	1.0203	0.0047	...	2B	...	...	...	...	...	...
		3A	...	...	...	...	...	...	...	...	3B	...	...	...	1.0310	0.0046	...

Table E-1
Limits of Size for Standard Series Internal and External Threads as Listed in Table 3A of ASME B1.1-1989 (Cont'd)

Nominal Size and Threads/in.	Series Designation	Class	Allowance	External							Internal						
				Major Diameter			Pitch Diameter and Functional Diameter [Note (1)]			Maximum UNR Minor Diameter (Ref.)	Minor Diameter			Pitch Diameter and Func- tional Diameter [Note (1)]			Minimum Major Diameter
1 $\frac{1}{16}$ - 20 or 1.0625 - 20	UN	2A	...	...	...	...	...	1.0241	0.0045	...	2B	...	...	...	...	...	...
		3A	...	...	...	...	...	...	...	...	3B	...	1.0162	...	1.0344	0.0044	...
1 $\frac{1}{8}$ - 7 or 1.1250 - 7	UNC	2A	...	...	...	...	...	...	0.0072	...	2B	...	...	...	...	...	...
1 $\frac{1}{8}$ - 16 or 1.1250 - 16	UN	2A	...	...	...	...	...	...	...	...	2B	...	...	...	1.0909	0.0065	...
		3A	...	...	...	...	...	1.0807	0.0037	...	3B	...	1.0658	...	...	...	...
1 $\frac{1}{8}$ - 18 or 1.1250 - 18	UNEF	2A	...	...	...	...	...	1.0828	0.0047	...	2B	...	...	...	...	...	...
		3A	...	...	...	...	...	...	...	...	3B	...	...	...	1.0935	0.0046	...
1 $\frac{1}{8}$ - 20 or 1.1250 - 20	UN	2A	...	...	...	...	...	1.0866	0.0045	...	2B	...	...	...	1.0984	0.0059	...
		3A	...	...	...	...	...	1.0891	0.0034	...	3B	...	1.0787	...	1.0969	0.0044	...
1 $\frac{3}{16}$ - 12 or 1.1875 - 12	UN	2A	...	...	...	...	...	1.1259	0.0058	...	2B	...	...	...	...	...	...
1 $\frac{3}{16}$ - 16 or 1.1875 - 16	UN	3A	...	...	...	...	...	...	...	...	3B	...	1.1283	...	1.1519	0.0050	...
1 $\frac{3}{16}$ - 18 or 1.1875 - 18	UNEF	2A	0.0015	1.1860	1.1773	...	1.1499	1.1450	0.0049	...	2B	...	...	...	...	...	...
1 $\frac{3}{16}$ - 20 or 1.1875 - 20	UN	2A	...	...	...	...	...	1.1489	0.0047	...	2B	...	...	...	1.1611	0.0061	...
		3A	...	...	...	...	...	...	...	...	3B	...	1.1412	...	...	...	...
1 $\frac{1}{4}$ - 16 or 1.2500 - 16	UN	3A	...	...	...	...	...	...	...	...	3B	...	1.1908	...	...	...	...
1 $\frac{1}{4}$ - 20 or 1.2500 - 20	UN	3A	...	...	...	...	...	...	...	...	3B	...	1.2037	...	...	...	...
1 $\frac{5}{16}$ - 12 or 1.3125 - 12	UN	3A	...	...	...	...	...	1.2541	0.0045	...	3B	...	...	...	1.2640	0.0056	...
1 $\frac{5}{16}$ - 16 or 1.3125 - 16	UN	2A	...	...	...	...	...	...	...	...	2B	...	...	...	1.2785	0.0066	...
		3A	...	...	...	...	...	...	...	...	3B	...	1.2533	...	...	...	...
1 $\frac{5}{16}$ - 18 or 1.3125 - 18	UNEF	2A	...	...	...	...	...	...	...	...	2B	...	...	...	1.2827	0.0063	...
		3A	...	...	...	...	...	1.2728	0.0038	...	3B	...	...	...	1.2811	0.0047	...
1 $\frac{5}{16}$ - 20 or 1.3125 - 20	UN	3A	...	...	...	...	...	...	...	...	3B	...	1.2662	...	1.2845	0.0045	...
1 $\frac{5}{16}$ - 28 or 1.3125 - 28	UN	2A	...	...	...	...	...	...	...	...	2B	...	...	...	1.2946	0.0053	...
1 $\frac{3}{8}$ - 16 or 1.3750 - 16	UN	2A	...	...	...	...	...	1.3278	0.0051	...	2B	...	...	...	1.3410	0.0066	...
		3A	...	...	...	...	...	...	...	...	3B	...	1.3158	...	...	...	...

Table E-1
Limits of Size for Standard Series Internal and External Threads as Listed in Table 3A of ASME B1.1-1989 (Cont'd)

Nominal Size and Threads/in.	Series Designation	Class	Allowance	External							Internal						
				Major Diameter			Pitch Diameter and Functional Diameter [Note (1)]			Maximum UNR Minor Diameter (Ref.)	Minor Diameter			Pitch Diameter and Func- tional Diameter [Note (1)]			Minimum Major Diameter
				Max.	Min.	Min.	Max.	Min.	Toler- ance		Class	Min.	Max.	Min.	Max.	Toler- ance	
180	UNEF	2A	...	...	...	...	...	...	...	...	2B	...	...	...	1.3452	0.0063	...
		3A	...	...	...	...	...	1.3353	0.0036	...	3B	...	...	...	1.3436	0.0047	...
	UN	3A	...	...	...	...	...	...	...	...	3B	...	1.3287	...	1.3470	0.0045	...
		2A	...	...	...	...	...	...	...	...	2B	...	...	...	1.3571	0.0053	...
	UN	2A	...	...	...	...	...	...	...	...	2B	...	...	...	1.4037	0.0068	...
		3A	...	...	...	...	...	...	...	...	3B	...	1.3783	...	...	...	...
	UNEF	2A	...	...	...	...	...	1.3949	0.0050	...	2B	...	...	...	...	...	...
		2A	...	...	...	...	...	1.3988	0.0048	...	2B	...	...	...	...	...	...
		3A	...	...	...	...	...	...	...	...	3B	...	1.3912	...	...	...	...
		3A	...	...	...	...	...	...	...	...	3B	...	1.4408	...	...	...	...
	UNEF	2A	...	...	...	...	...	...	...	...	2B	...	1.452	...	...	...	...
		3A	...	...	...	...	...	...	...	...	3B	...	1.4537	...	...	...	...
	UN	2A	...	...	...	...	...	...	...	...	2B	...	...	...	1.5160	0.0076	...
		3A	...	...	...	...	...	...	...	...	3B	...	...	...	1.5141	0.0057	...
	UN	3A	...	...	...	...	...	...	...	...	3B	...	1.5033	...	...	...	...
		3A	...	...	...	...	...	...	...	...	3B	...	...	...	1.5312	0.0048	...
	UN	3A	...	...	...	...	...	...	...	...	3B	...	1.5162	...	1.5346	0.0046	...
		2A	...	...	...	...	...	...	...	...	2B	...	...	...	1.5785	0.0076	...
		3A	...	...	...	...	...	...	...	...	3B	...	...	...	1.5766	0.0057	...
		2A	...	...	...	...	...	1.5776	0.0052	...	2B	...	...	...	...	...	...
	UN	3A	...	...	...	...	...	1.5852	0.0037	...	3B	...	...	...	1.5937	0.0048	...
		3A	...	...	...	...	...	...	...	...	3B	...	1.5787	...	1.5971	0.0046	...
	UN	2A	...	...	...	...	...	1.6256	0.0060	...	2B	...	...	...	1.6412	0.0076	...
		3A	...	...	...	...	...	...	...	...	3B	...	1.6283	...	1.6521	0.0052	...
	UNEF	2A	...	...	...	...	...	1.6448	0.0051	...	2B	...	...	...	1.6580	0.0066	...

Table E-1
Limits of Size for Standard Series Internal and External Threads as Listed in Table 3A of ASME B1.1-1989 (Cont'd)

Nominal Size and Threads/in.	Series Designation	Class	Allowance	External							Internal						
				Major Diameter			Pitch Diameter and Functional Diameter [Note (1)]			Maximum UNR Minor Diameter (Ref.)	Minor Diameter		Pitch Diameter and Func- tional Diameter [Note (1)]			Minimum Major Diameter	
Max.	Min.	Min.	Max.	Min.	Tolerance	Class	Min.	Max.	Min.	Max.	Tolerance						
1 ¹¹ / ₁₆ - 20 or 1.6875 - 20	UN	2A	0.0015	1.6860	1.6779	...	1.6535	1.6487	...	...	2B	...	...	...	...	...	...
		3A	...	...	...	...	...	...	...	...	3B	...	1.6412	...	...	...	...
1 ³ / ₄ - 5 or 1.7500 - 5	UNC	1A	...	...	...	...	...	...	...	...	1B	1.534	1.568	...	...	...	...
		2A	...	...	...	...	...	...	...	...	2B	1.534	1.568	...	...	...	...
		3A	...	...	...	...	...	...	...	...	3B	1.5340	...	...	...	...	...
1 ³ / ₄ - 8 or 1.7500 - 8	UN	3A	...	...	...	...	...	1.6632	0.0056	...	3B	...	...	...	...	...	...
1 ³ / ₄ - 16 or 1.7500 - 16	UN	3A	...	...	...	...	...	...	...	...	3B	...	1.6908	...	...	...	...
1 ³ / ₄ - 20 or 1.7500 - 20	UN	3A	...	...	...	...	...	...	...	...	3B	...	1.7037	...	...	...	...
1 ¹³ / ₁₆ - 16 or 1.8125 - 16	UN	3A	...	...	...	...	...	...	...	...	3B	...	1.7533	...	...	...	...
1 ¹³ / ₁₆ - 20 or 1.8125 - 20	UN	3A	...	...	...	...	...	1.7764	0.0036	...	3B	...	1.7662	...	...	...	...
1 ⁷ / ₈ - 12 or 1.8750 - 12	UN	3A	...	...	...	...	...	...	...	...	3B	...	...	...	1.8267	0.0058	...
1 ⁷ / ₈ - 16 or 1.8750 - 16	UN	3A	...	...	...	...	...	...	...	...	3B	...	1.8158	...	...	...	...
1 ⁷ / ₈ - 20 or 1.8750 - 20	UN	2A	...	...	...	...	...	1.8362	0.0048	...	2B	...	...	...	1.8488	0.0063	...
		3A	...	...	...	...	...	1.8389	0.0036	...	3B	...	1.8287	...	1.8472	0.0047	...
1 ¹⁵ / ₁₆ - 12 or 1.9375 - 12	UN	2A	...	...	...	...	...	1.8755	0.0061	...	2B	...	...	...	1.8913	0.0079	...
1 ¹⁵ / ₁₆ - 16 or 1.9375 - 16	UN	3A	...	...	...	...	...	...	...	...	3B	...	1.8785	...	...	...	...
1 ¹⁵ / ₁₆ - 20 or 1.9375 - 20	UN	3A	...	...	...	...	...	...	...	...	3B	...	1.8912	...	...	...	...
2 - 16 or 2.0000 - 16	UN	3A	...	...	...	...	...	...	...	...	3B	...	1.9408	...	...	...	...
2 - 20 or 2.0000 - 20	UN	3A	...	...	...	...	...	...	...	...	3B	...	1.9537	...	...	...	...
2 ¹ / ₈ - 12 or 2.1250 - 12	UN	3A	...	...	...	...	...	2.0664	0.0045	...	3B	...	...	...	...	...	...
2 ¹ / ₈ - 16 or 2.1250 - 16	UN	3A	...	...	...	...	...	...	...	...	3B	...	2.0658	...	2.0896	0.0052	...
2 ¹ / ₈ - 20 or 2.1250 - 20	UN	2A	...	...	...	...	...	2.0861	0.0049	...	2B	...	...	...	2.0989	0.0064	...
		3A	...	...	...	...	...	...	...	...	3B	...	2.0787	...	...	...	...
2 ¹ / ₄ - 12 or 2.2500 - 12	UN	2A	...	...	...	...	...	...	...	...	2B	...	...	...	2.2038	0.0079	...
		3A	...	...	...	...	...	2.1914	0.0045	...	3B	...	...	...	2.2018	0.0059	...

Table E-1
Limits of Size for Standard Series Internal and External Threads as Listed in Table 3A of ASME B1.1-1989 (Cont'd)

Nominal Size and Threads/in.	Series Designation	Class	Allowance	External							Internal						
				Major Diameter			Pitch Diameter and Functional Diameter [Note (1)]			Maximum UNR Minor Diameter (Ref.)	Minor Diameter			Pitch Diameter and Func- tional Diameter [Note (1)]			Minimum Major Diameter
				Max.	Min.	Min.	Max.	Min.	Toler- ance		Class	Min.	Max.	Min.	Max.	Toler- ance	
2 $\frac{1}{4}$ - 16 or 2.2500 - 16	UN	2A	...	...	...	...	...	2.2024	0.0054	...	2B	...	...	...	2.2164	0.0070	...
		3A	...	...	...	...	...	...	...	...	3B	...	2.1908	...	2.2146	0.0052	...
2 $\frac{1}{4}$ - 20 or 2.2500 - 20	UN	2A	...	...	...	...	...	2.2111	0.0049	...	2B	...	...	...	2.2239	0.0064	...
		3A	...	...	...	...	...	...	...	...	3B	...	2.2037	...	2.2223	0.0048	...
2 $\frac{3}{8}$ - 6 or 2.3750 - 6	UN	2A	...	...	...	...	...	...	...	...	2B	...	2.226	...	...	...	...
2 $\frac{3}{8}$ - 12 or 2.3750 - 12	UN	2A	0.0019	2.3731	2.3617	...	2.3190	2.3128	...	...	2B	...	...	...	2.3290	0.0081	...
2 $\frac{3}{8}$ - 16 or 2.3750 - 16	UN	2A	0.0017	2.3733	2.3639	...	2.3327	2.3272	...	...	2B	...	...	...	2.3416	0.0072	...
		3A	...	...	...	...	...	...	...	...	3B	...	2.3158	...	...	...	...
2 $\frac{3}{8}$ - 20 or 2.3750 - 20	UN	2A	...	...	...	...	...	2.3359	0.0051	...	2B	...	...	...	...	...	...
		3A	...	...	...	...	...	...	...	...	3B	...	2.3287	...	2.3475	0.0050	...
2 $\frac{1}{2}$ - 16 or 2.5000 - 16	UN	3A	...	...	...	...	...	...	...	...	3B	...	2.4408	...	...	...	...
2 $\frac{1}{2}$ - 20 or 2.5000 - 20	UN	3A	...	...	...	...	...	...	...	...	3B	...	2.4537	...	...	...	...
2 $\frac{5}{8}$ - 12 or 2.6250 - 12	UN	3A	...	...	...	...	...	2.5663	0.0046	...	3B	...	...	...	2.5769	0.0060	...
2 $\frac{5}{8}$ - 16 or 2.6250 - 16	UN	2A	...	...	...	...	...	2.5772	0.0055	...	2B	...	...	...	...	...	...
		3A	...	...	...	...	...	2.5803	0.0041	...	3B	...	2.5658	...	...	...	...
2 $\frac{5}{8}$ - 20 or 2.6250 - 20	UN	3A	...	...	...	...	...	...	...	...	3B	...	2.5784	...	...	...	...
2 $\frac{3}{4}$ - 12 or 2.7500 - 12	UN	2A	...	...	...	...	...	2.6878	0.0062	...	2B	...	...	...	...	...	...
		3A	...	...	...	...	...	2.6913	0.0046	...	3B	...	...	...	2.7019	0.0060	...
2 $\frac{3}{4}$ - 16 or 2.7500 - 16	UN	2A	...	...	...	...	...	2.7022	0.0055	...	2B	...	...	...	2.7166	0.0072	...
		3A	...	...	...	...	...	2.7053	0.0041	...	3B	...	2.6908	...	...	...	...
2 $\frac{3}{4}$ - 20 or 2.7500 - 20	UN	2A	...	...	...	...	...	...	...	...	2B	...	...	...	2.7241	0.0066	...
		3A	...	...	...	...	...	2.7137	0.0038	...	3B	...	2.7037	...	...	...	...
2 $\frac{7}{8}$ - 12 or 2.8750 - 12	UN	3A	...	...	...	...	...	...	...	...	3B	...	...	...	2.8271	0.0062	...
2 $\frac{7}{8}$ - 16 or 2.8750 - 16	UN	3A	...	...	...	...	...	...	...	...	3B	...	2.8158	...	...	...	...
2 $\frac{7}{8}$ - 20 or 2.8750 - 20	UN	2A	...	...	...	...	...	...	...	...	2B	...	...	...	2.8493	0.0068	...
		3A	...	...	...	...	...	...	...	...	3B	...	2.8287	...	2.8476	0.0051	...

Table E-1
Limits of Size for Standard Series Internal and External Threads as Listed in Table 3A of ASME B1.1-1989 (Cont'd)

External											Internal						
Nominal Size and Threads/in.	Series Designation	Class	Allowance	Major Diameter			Pitch Diameter and Functional Diameter [Note (1)]			Maximum UNR Minor Diameter (Ref.)	Minor Diameter			Pitch Diameter and Func- tional Diameter [Note (1)]			Minimum Major Diameter
				Max.	Min.	Min.	Max.	Min.	Tolerance		Min.	Max.	Min.	Max.	Tolerance		
3 - 16 or 3.0000 - 16	UN	2A	...	...	...	...	...	...	0.0056	...	2B	...	...	...	...	...	...
		3A	...	...	...	...	...	...	...	3B	...	2.9408	...	...	...	...	
3 - 20 or 3.0000 - 20	UN	3A	...	...	...	...	...	...	...	3B	...	2.9537	...	...	...	...	
3 $\frac{1}{8}$ - 12 or 3.1250 - 12	UN	2A	...	...	...	...	...	3.0627	0.0063	...	2B	...	...	...	3.0791	0.0082	...
		3A	...	...	...	...	...	3.0662	0.0047	...	3B	...	...	...	...	...	
3 $\frac{1}{8}$ - 16 or 3.1250 - 16	UN	2A	...	...	...	...	...	3.0771	0.0056	...	2B	...	...	...	3.0917	0.0073	...
		3A	...	...	...	...	...	3.0802	0.0042	...	3B	...	3.0658	...	...	...	
3 $\frac{1}{4}$ - 12 or 3.2500 - 12	UN	2A	...	...	...	...	...	3.1877	0.0063	...	2B	...	...	...	3.2041	0.0082	...
		3A	...	...	...	...	...	3.1912	0.0047	...	3B	...	...	...	...	...	
3 $\frac{1}{4}$ - 16 or 3.2500 - 16	UN	2A	...	...	...	...	...	3.2021	0.0056	...	2B	...	...	...	3.2167	0.0073	...
		3A	...	...	...	...	...	3.2052	0.0042	...	3B	...	3.1908	...	3.2149	0.0055	...
3 $\frac{3}{8}$ - 12 or 3.3750 - 12	UN	2A	...	...	...	...	...	...	...	2B	...	...	...	3.3293	0.0084	...	
3 $\frac{3}{8}$ - 16 or 3.3750 - 16	UN	2A	...	...	...	...	...	3.3269	0.0058	...	2B	...	...	...	...	...	...
		3A	...	...	...	...	...	...	...	3B	...	3.3158	...	...	...	...	
3 $\frac{1}{2}$ - 16 or 3.5000 - 16	UN	3A	...	...	...	...	...	...	...	3B	...	3.4408	...	...	...	...	
3 $\frac{5}{8}$ - 12 or 3.6250 - 12	UN	2A	...	...	...	...	...	3.5626	0.0064	...	2B	...	...	...	...	...	...
3 $\frac{5}{8}$ - 16 or 3.6250 - 16	UN	3A	...	...	...	...	...	...	...	3B	...	3.5658	...	...	...	...	...
3 $\frac{3}{4}$ - 12 or 3.7500 - 12	UN	2A	...	...	...	...	...	3.6876	0.0064	...	2B	...	...	...	...	...	...
		3A	...	...	...	...	...	3.6911	0.0048	...	3B	...	...	...	...	...	
3 $\frac{3}{4}$ - 16 or 3.7500 - 16	UN	2A	...	...	...	...	...	...	...	2B	...	...	...	...	3.7169	0.0075	...
		3A	...	...	...	...	...	3.7051	0.0043	...	3B	...	3.6908	...	3.7150	0.0056	...
3 $\frac{7}{8}$ - 16 or 3.8750 - 16	UN	2A	...	...	...	...	...	3.8267	0.0059	...	2B	...	...	...	...	...	...
		3A	...	...	...	...	...	...	...	3B	...	3.8158	...	...	...	...	
4 - 16 or 4.0000 - 16	UN	3A	...	...	...	...	...	...	...	3B	...	3.9408	...	...	...	...	...
4 $\frac{1}{8}$ - 12 or 4.1250 - 12	UN	2A	...	...	...	...	...	4.0624	0.0065	...	2B	...	...	...	...	...	...

Table E-1
Limits of Size for Standard Series Internal and External Threads as Listed in Table 3A of ASME B1.1-1989 (Cont'd)

External											Internal						
Nominal Size and Threads/in.	Series Designation	Class	Allowance	Major Diameter			Pitch Diameter and Functional Diameter [Note (1)]			Maximum UNR Minor Diameter (Ref.)	Minor Diameter			Pitch Diameter and Func- tional Diameter [Note (1)]			Minimum Major Diameter
				Max.	Min.	Min.	Max.	Min.	Toler- ance		Min.	Max.	Min.	Max.	Toler- ance		
4 ¹ / ₈ - 16 or 4.1250 - 16	UN	2A	...	...	...	...	...	...	...	...	2B	...	...	...	4.0920	0.0076	...
		3A	...	...	...	...	...	...	...	3B	...	4.0658	...	...	...	...	
4 ¹ / ₄ - 8 or 4.2500 - 8	UN	2A	...	...	...	...	...	...	...	...	2B	...	...	...	4.1808	0.0120	...
		3A	...	...	...	...	...	...	...	3B	...	...	...	4.1779	0.0091	...	
4 ¹ / ₄ - 12 or 4.2500 - 12	UN	2A	...	...	...	...	...	4.1874	0.0065	...	2B	...	...	...	4.2044	0.0085	...
4 ¹ / ₄ - 16 or 4.2500 - 16	UN	2A	...	...	...	...	...	...	...	...	2B	...	...	...	4.2170	0.0076	...
		3A	...	...	...	...	...	...	...	3B	...	4.1908	...	4.2151	0.0057	...	
4 ³ / ₈ - 8 or 4.3750 - 8	UN	2A	...	...	...	...	...	...	...	...	2B	...	...	...	4.3058	0.0120	...
4 ³ / ₈ - 12 or 4.3750 - 12	UN	2A	...	...	...	...	...	4.3124	0.0065	...	2B	...	...	...	4.3294	0.0085	...
		3A	...	...	...	...	...	4.3160	0.0049	...	3B	...	...	...	...	...	...
4 ³ / ₈ - 16 or 4.3750 - 16	UN	2A	...	...	...	...	...	...	...	...	2B	...	...	...	4.3420	0.0076	...
		3A	...	...	...	...	...	4.3300	0.0044	...	3B	...	4.3158	...	4.3401	0.0057	...
4 ¹ / ₂ - 12 or 4.5000 - 12	UN	2A	...	...	...	...	...	4.4374	0.0065	...	2B	...	...	...	4.4544	0.0085	...
		3A	...	...	...	...	...	4.4410	0.0049	...	3B	...	...	...	4.4523	0.0064	...
4 ¹ / ₂ - 16 or 4.5000 - 16	UN	2A	...	...	...	...	...	4.4517	0.0059	...	2B	...	...	...	4.4670	0.0076	...
		3A	...	...	...	...	...	4.4550	0.0044	...	3B	...	4.4408	...	4.4651	0.0057	...
4 ⁵ / ₈ - 8 or 4.6250 - 8	UN	2A	0.0029	4.6221	4.6071	...	4.5409	4.5314	...	...	2B	...	...	...	4.5562	0.0124	...
		3A	...	...	...	...	...	...	...	...	3B	...	...	...	4.5531	0.0093	...
4 ⁵ / ₈ - 16 or 4.6250 - 16	UN	2A	...	...	...	...	...	4.5765	0.0061	...	2B	...	...	...	4.5923	0.0079	...
		3A	...	...	...	...	...	...	...	...	3B	...	4.5658	...	4.5903	0.0059	...
4 ³ / ₄ - 8 or 4.7500 - 8	UN	3A	...	...	...	...	...	4.6617	0.0071	...	3B	...	...	...	...	...	...
4 ³ / ₄ - 12 or 4.7500 - 12	UN	3A	...	...	...	...	...	...	...	...	3B	...	...	...	4.7025	0.0066	...
4 ³ / ₄ - 16 or 4.7500 - 16	UN	2A	...	...	...	...	...	4.7015	0.0059	...	2B	...	...	...	4.7173	0.0079	...
		3A	...	...	...	...	...	...	...	...	3B	...	4.6908	...	...	...	...
4 ⁷ / ₈ - 12 or 4.8750 - 12	UN	3A	...	...	...	...	...	...	...	...	3B	...	...	...	4.8275	0.0066	...

Table E-1
Limits of Size for Standard Series Internal and External Threads as Listed in Table 3A of ASME B1.1-1989 (Cont'd)

Nominal Size and Threads/in.	Series Designation	Class	Allowance	External							Internal						
				Major Diameter			Pitch Diameter and Functional Diameter [Note (1)]			Maximum UNR Minor Diameter (Ref.)	Minor Diameter			Pitch Diameter and Func- tional Diameter [Note (1)]			Minimum Major Diameter
4 $\frac{7}{8}$ - 16 or 4.8750 - 16	UN	2A	...	...	...	...	...	4.8265	0.0061	...	2B	...	...	...	4.8423	0.0079	...
		3A	...	...	...	...	...	...	...	...	3B	...	4.8158	...	...	...	...
5 - 8 or 5.0000 - 8	UN	3A	...	...	...	...	...	...	...	...	3B	...	...	...	4.9283	0.0095	...
5 - 16 or 5.0000 - 16	UN	3A	...	...	...	...	...	...	...	...	3B	...	4.9408	...	...	...	...
5 $\frac{1}{8}$ - 8 or 5.1250 - 8	UN	2A	...	...	...	...	...	...	...	...	2B	...	...	...	5.0564	0.0126	...
5 $\frac{1}{8}$ - 12 or 5.1250 - 12	UN	2A	...	...	...	...	...	...	...	...	2B	...	...	...	5.0796	0.0087	...
		3A	...	...	...	...	...	5.0659	0.0050	...	3B	...	...	...	...	...	...
5 $\frac{1}{8}$ - 16 or 5.1250 - 16	UN	3A	...	...	...	...	...	5.0799	0.0045	...	3B	...	5.0658	...	...	...	...
5 $\frac{1}{4}$ - 8 or 5.2500 - 8	UN	3A	...	...	...	...	...	5.1614	0.0074	...	3B	...	...	...	5.1784	0.0096	...
5 $\frac{1}{4}$ - 12 or 5.2500 - 12	UN	2A	...	...	...	...	...	5.1872	0.0067	...	2B	...	...	...	5.2046	0.0087	...
		3A	...	...	...	...	...	5.1909	0.0050	...	3B	...	...	...	...	...	...
5 $\frac{1}{4}$ - 16 or 5.2500 - 16	UN	3A	...	...	...	...	...	5.2049	0.0047	...	3B	...	...	...	...	...	...
5 $\frac{3}{8}$ - 8 or 5.3750 - 8	UN	2A	...	...	...	...	...	...	...	...	2B	...	...	...	5.3067	0.0129	...
		3A	...	...	...	...	...	...	...	...	3B	...	...	...	5.3035	0.0097	...
5 $\frac{3}{8}$ - 12 or 5.3750 - 12	UN	2A	...	...	...	...	...	5.3122	0.0067	...	2B	...	...	...	5.3296	0.0087	...
		3A	...	...	...	...	...	5.3159	0.0050	...	3B	...	...	...	...	...	...
5 $\frac{3}{8}$ - 16 or 5.3750 - 16	UN	3A	...	...	...	...	...	5.3299	0.0045	...	3B	...	5.3158	...	5.3403	0.0059	...
5 $\frac{1}{2}$ - 12 or 5.5000 - 12	UN	2A	...	...	...	...	...	5.4372	0.0067	...	2B	...	...	...	5.4546	0.0087	...
		3A	...	...	...	...	...	5.4409	0.0050	...	3B	...	...	...	...	...	...
5 $\frac{1}{2}$ - 16 or 5.5000 - 16	UN	2A	...	...	...	...	...	...	...	...	2B	...	...	...	5.4673	0.0079	...
		3A	...	...	...	...	...	5.4549	0.0045	...	3B	...	5.4408	...	5.4653	0.0059	...
5 $\frac{5}{8}$ - 8 or 5.6250 - 8	UN	3A	...	...	...	...	...	...	...	...	3B	...	...	...	5.5536	0.0098	...
5 $\frac{5}{8}$ - 12 or 5.6250 - 12	UN	2A	0.0021	5.6229	5.6115	...	5.5688	5.5619	0.0069	...	2B	...	...	...	5.5799	0.0090	...
		3A	...	...	...	...	...	5.5657	0.0052	...	3B	...	...	...	...	...	...
5 $\frac{5}{8}$ - 16 or 5.6250 - 16	UN	2A	0.0019	5.6231	5.6137	...	5.5825	5.5763	...	...	2B	...	...	...	5.5925	0.0081	...
		3A	...	...	...	...	...	5.5797	0.0047	...	3B	...	5.5658	...	5.5905	0.0061	...

Table E-1
Limits of Size for Standard Series Internal and External Threads as Listed in Table 3A of ASME B1.1-1989 (Cont'd)

Nominal Size and Threads/in.	Series Designation	Class	Allowance	External							Internal						
				Major Diameter			Pitch Diameter and Functional Diameter [Note (1)]			Maximum UNR Minor Diameter (Ref.)	Minor Diameter			Pitch Diameter and Func- tional Diameter [Note (1)]			Minimum Major Diameter
				Max.	Min.	Min.	Max.	Min.	Toler- ance		Class	Min.	Max.	Min.	Max.	Toler- ance	
5 $\frac{3}{4}$ - 8 or 5.7500 - 8	UN	2A	...	...	5.7250	...	...	...	...	...	2B	...	...	...	...	...	...
5 $\frac{3}{4}$ - 12 or 5.7500 - 12	UN	2A	...	...	...	...	...	5.6869	0.0069	...	2B	...	...	...	5.7049	0.0090	...
		3A	...	...	...	...	...	5.6907	0.0052	...	3B	...	...	...	...	...	...
5 $\frac{3}{4}$ - 16 or 5.7500 - 16	UN	2A	...	...	...	...	...	...	...	...	2B	...	...	...	5.7175	0.0081	...
		3A	...	...	...	...	...	5.7047	0.0047	...	3B	...	5.6908	...	5.7155	0.0061	...
5 $\frac{7}{8}$ - 8 or 5.8750 - 8	UN	2A	0.0031	5.8719	5.8569	...	5.7907	5.7806	...	...	2B	...	...	...	...	...	...
5 $\frac{7}{8}$ - 12 or 5.8750 - 12	UN	2A	...	...	...	...	...	...	...	...	2B	...	...	...	5.8299	0.0090	...
5 $\frac{7}{8}$ - 16 or 5.8750 - 16	UN	3A	...	...	...	...	...	5.8297	0.0047	...	3B	...	5.8158	...	5.8405	0.0061	...
6 - 8 or 6.0000 - 8	UN	2A	0.0031	5.9969	5.9819	...	5.9157	5.9055	...	...	2B	...	...	...	5.9321	0.0131	...
		3A	...	...	...	...	...	5.9111	0.0077	...	3B	...	...	...	5.9287	0.0099	...
6 - 16 or 6.0000 - 16	UN	3A	...	...	...	...	...	...	...	...	3B	...	5.9408	...	...	...	...

GENERAL NOTES:

- (a) The limits listed in this Table are no longer considered standard and are for information only. They have been replaced because of calculation errors and a change in rounding methods.
 (b) Product threads, gages, or tooling that conform to or were generated using limits listed in this Table should be considered acceptable. When replacing, the new limits should be used.
 (c) It is recommended that all users prepare for the eventual adoption of only the values in [Tables 2A](#) and [2B](#).

NOTE: (1) See [para. 5.2.1](#) for functional diameter.

Table E-2
Limits as Listed in Table D-1 (Formerly 3B) Prior to ASME B1.1-2003 Edition

Nominal Size and Threads/in.	Series Designation	External								Internal						
		Class	Allowance	Major Diameter		Pitch Diameter and Functional Diameter [Note (1)]		Toler- ance	Maximum UNR Minor Diameter (Ref.)	Minor Diameter			Pitch Diameter and Functional Diameter [Note (1)]			Minimum Major Diameter
				Max.	Min.	Max.	Min.			Class	Min.	Max.	Min.	Max.	Toler- ance	
10 - 28 or 0.1900 - 28	UNS	2A	...	...	...	...	...	...	0.1464	2B	...	...	...	...	...	...
10 - 36 or 0.1900 - 36	UNS	2A	...	...	...	...	...	...	...	2B	...	0.166	...	...	...	...
10 - 40 or 0.1900 - 40	UNS	2A	...	...	...	...	...	...	0.1592	2B	...	...	...	...	...	...
10 - 48 or 0.1900 - 48	UNS	2A	...	...	...	...	...	...	...	2B	...	...	...	...	...	...
10 - 56 or 0.1900 - 56	UNS	2A	...	...	...	...	...	...	0.1681	2B	...	...	...	...	...	...
12 - 36 or 0.2160 - 36	UNS	2A	...	...	...	...	...	...	0.1821	2B	...	0.192	...	...	...	...
12 - 40 or 0.2160 - 40	UNS	2A	...	...	...	...	...	...	0.1835	2B	...	...	...	0.2035	0.0037	...
12 - 48 or 0.2160 - 48	UNS	2A	...	...	...	...	0.1991	0.0026	...	2B	...	...	...	0.2059	0.0034	...
12 - 56 or 0.2160 - 56	UNS	2A	0.0007	0.2153	0.2112	0.2037	0.2012	...	0.1941	2B	...	...	...	0.2076	0.0032	...
1/4 - 24 or 0.2500 - 24	UNS	2A	...	...	...	...	...	...	...	2B	...	...	...	...	...	...
1/4 - 27 or 0.2500 - 27	UNS	2A	...	...	...	...	...	...	...	2B	...	...	...	...	...	...
1/4 - 36 or 0.2500 - 36	UNS	2A	...	...	...	...	...	...	0.2161	2B	...	0.226	...	...	...	...
1/4 - 40 or 0.2500 - 40	UNS	2A	...	...	...	...	...	...	...	2B	...	...	...	...	...	...
1/4 - 48 or 0.2500 - 48	UNS	2A	...	...	...	...	...	...	0.2243	2B	...	...	...	...	...	...
1/4 - 56 or 0.2500 - 56	UNS	2A	...	...	...	...	...	...	0.2280	2B	...	...	...	...	...	...
5/16 - 27 or 0.3125 - 27	UNS	2A	0.0010	0.3115	0.3048	0.2874	0.2839	0.0035	0.2674	2B	...	...	...	0.2929	0.0045	...
5/16 - 36 or 0.3125 - 36	UNS	2A	...	...	...	...	...	...	...	2B	...	...	...	0.2985	0.0040	...
5/16 - 40 or 0.3125 - 40	UNS	2A	...	...	...	...	0.2925	0.0029	...	2B	...	...	...	0.3001	0.0038	...
5/16 - 48 or 0.3125 - 48	UNS	2A	...	...	...	...	0.2955	0.0027	...	2B	...	...	...	...	...	...
3/8 - 18 or 0.3750 - 18	UNS	2A	...	...	...	...	...	...	0.3076	2B	...	...	...	...	...	...
3/8 - 27 or 0.3750 - 27	UNS	2A	...	...	...	...	...	...	...	2B	...	...	...	...	...	...
3/8 - 36 or 0.3750 - 36	UNS	2A	...	...	...	...	...	...	...	2B	...	...	...	...	...	...

Table E-2
Limits as Listed in Table D-1 (Formerly 3B) Prior to ASME B1.1-2003 Edition (Cont'd)

Nominal Size and Threads/in.	Series Designation	External								Internal						
		Class	Allowance	Major Diameter		Pitch Diameter and Functional Diameter [Note (1)]			Maximum UNR Minor Diameter (Ref.)	Minor Diameter			Pitch Diameter and Functional Diameter [Note (1)]			Minimum Major Diameter
				Max.	Min.	Max.	Min.	Toler- ance		Class	Min.	Max.	Min.	Max.	Toler- ance	
$\frac{3}{8}$ - 40 or 0.3750 - 40	UNS	2A	...	...	...	...	...	...	...	2B	...	...	...	...	...	...
0.390 - 27 or 0.3900 - 27	UNS	2A	...	...	...	...	...	...	...	2B	...	...	...	...	...	...
$\frac{7}{16}$ - 18 or 0.4375 - 18	UNS	2A	...	...	...	...	0.3958	0.0043	0.3701	2B	...	...	...	0.4070	0.0056	...
$\frac{7}{16}$ - 24 or 0.4375 - 24	UNS	2A	0.0011	0.4364	0.4292	0.4093	0.4055	0.0038	0.3868	2B	...	...	...	0.4153	0.0049	...
$\frac{7}{16}$ - 27 or 0.4375 - 27	UNS	2A	...	...	...	...	0.4087	0.0036	...	2B	...	...	...	0.4181	0.0047	...
$\frac{1}{2}$ - 12 or 0.5000 - 12	UNS	2A	...	...	...	...	...	...	...	2B	...	...	...	...	...	...
		3A	...	...	...	...	...	...	...	3B	...	0.422	...	...	...	...
$\frac{1}{2}$ - 14 or 0.5000 - 14	UNS	2A	...	...	...	...	...	...	0.4135	2B	...	...	...	...	...	...
$\frac{1}{2}$ - 18 or 0.5000 - 18	UNS	2A	...	...	...	...	...	...	0.4326	2B	...	...	...	...	...	...
$\frac{1}{2}$ - 24 or 0.5000 - 24	UNS	2A	...	...	...	...	...	...	...	2B	...	...	...	...	...	...
$\frac{1}{2}$ - 27 or 0.5000 - 27	UNS	2A	...	...	...	...	...	...	...	2B	...	...	...	...	...	...
$\frac{9}{16}$ - 14 or 0.5625 - 14	UNS	2A	...	...	...	...	...	...	0.4760	2B	...	...	...	...	...	...
$\frac{9}{16}$ - 27 or 0.5625 - 27	UNS	2A	...	...	...	...	0.5336	0.0037	...	2B	...	...	...	0.5432	0.0048	...
$\frac{5}{8}$ - 14 or 0.625 - 14	UNS	2A	...	...	...	...	...	...	0.5385	2B	...	0.564	...	...	...	...
$\frac{5}{8}$ - 27 or 0.6250 - 27	UNS	2A	...	...	...	...	...	...	...	2B	...	...	...	...	...	...
$\frac{3}{4}$ - 14 or 0.7500 - 14	UNS	2A	...	...	...	...	...	...	0.6635	2B	...	...	...	...	...	...
$\frac{3}{4}$ - 18 or 0.7500 - 18	UNS	2A	...	...	...	...	...	...	0.6825	2B	...	...	...	...	...	...
$\frac{3}{4}$ - 24 or 0.7500 - 24	UNS	2A	...	...	...	...	...	...	...	2B	...	...	...	...	...	...
$\frac{3}{4}$ - 27 or 0.7500 - 27	UNS	2A	...	...	...	...	...	...	...	2B	...	...	...	...	...	...
$\frac{7}{8}$ - 10 or 0.8750 - 10	UNS	2A	...	...	...	...	0.8022	0.0060	0.7542	2B	...	...	...	0.8178	0.0078	...
$\frac{7}{8}$ - 18 or 0.8750 - 18	UNS	2A	...	...	...	...	0.8329	0.0046	0.8075	2B	...	...	...	0.8449	0.0060	...
$\frac{7}{8}$ - 24 or 0.8750 - 24	UNS	2A	...	...	...	...	0.8426	0.0041	...	2B	...	...	...	0.8532	0.0052	...
$\frac{7}{8}$ - 27 or 0.8750 - 27	UNS	2A	...	...	...	...	0.8458	0.0039	...	2B	...	...	...	0.8560	0.0051	...

Table E-2
Limits as Listed in Table D-1 (Formerly 3B) Prior to ASME B1.1-2003 Edition (Cont'd)

Nominal Size and Threads/in.	Series Designation	External								Internal						
		Class	Allowance	Major Diameter		Pitch Diameter and Functional Diameter [Note (1)]		Toler- ance	Maximum UNR Minor Diameter (Ref.)	Minor Diameter			Pitch Diameter and Functional Diameter [Note (1)]			Minimum Major Diameter
				Max.	Min.	Max.	Min.			Class	Min.	Max.	Min.	Max.	Toler- ance	
1 - 10 or 1.0000 - 10	UNS	2A	...	...	...	...	...	...	0.8792	2B	...	...	...	...	...	...
1 - 18 or 1.0000 - 18	UNS	2A	...	...	...	...	...	...	0.9325	2B	...	...	...	...	...	...
1 - 24 or 1.0000 - 24	UNS	2A	...	...	...	...	...	...	...	2B	...	...	...	...	...	...
1 - 27 or 1.0000 - 27	UNS	2A	...	...	...	...	...	...	...	2B	...	...	...	...	...	...
1 $\frac{1}{8}$ - 10 or 1.1250 - 10	UNS	2A	0.0018	1.1232	1.1103	1.0582	1.0520	...	1.0042	2B	...	...	...	1.0680	0.0080	...
1 $\frac{1}{8}$ - 14 or 1.1250 - 14	UNS	2A	...	...	...	...	...	...	1.0384	2B	...	1.064	...	...	...	...
1 $\frac{1}{8}$ - 24 or 1.1250 - 24	UNS	2A	...	...	...	...	1.0924	0.0042	1.0742	2B	...	...	...	1.1034	0.0055	...
1 $\frac{1}{4}$ - 10 or 1.2500 - 10	UNS	2A	...	...	...	...	...	...	1.1291	2B	...	...	...	...	...	...
1 $\frac{1}{4}$ - 14 or 1.2500 - 14	UNS	2A	...	...	...	...	...	...	1.1634	2B	...	...	...	...	...	...
1 $\frac{1}{4}$ - 24 or 1.2500 - 24	UNS	2A	...	...	...	...	...	...	...	2B	...	...	...	...	...	...
1 $\frac{3}{8}$ - 10 or 1.3750 - 10	UNS	2A	...	...	...	...	...	...	1.2541	2B	...	...	...	...	...	...
1 $\frac{3}{8}$ - 14 or 1.3750 - 14	UNS	2A	...	...	...	...	1.3216	0.0054	1.2884	2B	...	1.314	...	1.3356	0.0070	...
1 $\frac{3}{8}$ - 24 or 1.3750 - 24	UNS	2A	...	...	...	...	1.3423	0.0043	...	2B	...	...	...	1.3535	0.0056	...
1 $\frac{1}{2}$ - 10 or 1.5000 - 10	UNS	2A	...	...	...	...	...	...	1.3791	2B	...	...	...	...	...	...
1 $\frac{1}{2}$ - 14 or 1.5000 - 14	UNS	2A	...	...	...	...	...	...	1.4133	2B	...	...	...	...	...	...
1 $\frac{1}{2}$ - 24 or 1.5000 - 24	UNS	2A	...	...	...	...	...	...	...	2B	...	...	...	...	...	...
1 $\frac{5}{8}$ - 10 or 1.6250 - 10	UNS	2A	...	...	...	...	...	...	1.5041	2B	...	...	...	...	...	...
1 $\frac{5}{8}$ - 14 or 1.6250 - 14	UNS	2A	...	...	...	...	...	...	1.5383	2B	...	1.564	...	...	...	...
1 $\frac{5}{8}$ - 24 or 1.6250 - 24	UNS	2A	...	...	...	...	1.5922	0.0044	...	2B	...	...	...	...	...	...
1 $\frac{3}{4}$ - 10 or 1.7500 - 10	UNS	2A	...	...	...	...	...	...	1.6291	2B	...	...	...	...	...	...
1 $\frac{3}{4}$ - 14 or 1.7500 - 14	UNS	2A	...	...	...	...	...	...	...	2B	...	...	...	...	...	...
1 $\frac{3}{4}$ - 18 or 1.7500 - 18	UNS	2A	...	...	...	...	...	...	1.6824	2B	...	...	...	...	...	...

Table E-2
Limits as Listed in Table D-1 (Formerly 3B) Prior to ASME B1.1-2003 Edition (Cont'd)

	Nominal Size and Threads/in.	Series Designation	External							Internal							
			Class	Allowance	Major Diameter		Pitch Diameter and Functional Diameter [Note (1)]		Maximum UNR Minor Diameter (Ref.)	Minor Diameter			Pitch Diameter and Functional Diameter [Note (1)]			Minimum Major Diameter	
					Max.	Min.	Max.	Min.		Toler- ance	Class	Min.	Max.	Min.	Max.		Toler- ance
190	1 ⁷ / ₈ - 10 or 1.8750 - 10	UNS	2A	0.0019	1.8731	1.8602	1.8081	1.8016	...	1.7534	2B	...	...	...	1.8184	0.0084	...
	1 ⁷ / ₈ - 14 or 1.8750 - 14	UNS	2A	...	...	...	...	...	...	1.7883	2B	...	1.814	...	...	...	...
	1 ⁷ / ₈ - 18 or 1.8750 - 18	UNS	2A	...	...	...	...	...	...	1.8074	2B	...	...	...	...	...	...
	2 - 10 or 2.0000 - 10	UNS	2A	...	...	...	...	...	...	1.8790	2B	...	...	...	...	...	...
	2 - 14 or 2.0000 - 14	UNS	2A	...	...	...	...	...	...	1.9133	2B	...	...	...	...	...	...
	2 - 18 or 2.0000 - 18	UNS	2A	...	...	...	...	...	...	1.9324	2B	...	...	...	...	...	...
	2 ¹ / ₁₆ - 16 or 2.0625 - 16	UNS	2A	...	...	...	...	...	...	1.9864	2B	...	...	...	...	...	...
			3A	...	...	...	...	...	...	1.9880	3B	...	2.003	...	2.0271	0.0052	...
	2 ³ / ₁₆ - 16 or 2.1875 - 16	UNS	2A	...	...	...	...	...	...	2.1154	2B	...	...	...	2.1539	0.0070	...
			3A	...	...	...	...	...	...	2.1130	3B	...	2.128	...	2.1521	0.0052	...
	2 ¹ / ₄ - 10 or 2.2500 - 10	UNS	2A	...	...	...	...	2.1765	0.0065	2.1290	2B	...	...	...	2.1935	0.0085	...
	2 ¹ / ₄ - 14 or 2.2500 - 14	UNS	2A	...	...	...	...	2.1962	0.0057	2.1633	2B	...	...	...	2.2110	0.0074	...
	2 ¹ / ₄ - 18 or 2.2500 - 18	UNS	2A	0.0015	2.2485	2.2398	2.2124	2.2073	0.0051	2.1824	2B	...	...	...	2.2206	0.0067	...
	2 ⁵ / ₁₆ - 16 or 2.3125 - 16	UNS	2A	0.0017	2.3108	2.3014	2.2702	2.2647	...	2.2363	2B	...	...	...	2.2791	0.0072	...
			3A	...	...	...	...	...	...	2.2380	3B	...	2.253	...	2.2773	0.0054	...
	2 ⁷ / ₁₆ - 16 or 2.4375 - 16	UNS	2A	...	...	...	...	...	...	2.3613	2B	...	...	...	...	...	...
			3A	...	...	...	...	...	...	2.3630	3B	...	2.378	...	...	...	...
	2 ¹ / ₂ - 10 or 2.5000 - 10	UNS	2A	...	...	...	...	...	...	2.3790	2B	...	...	...	...	...	...
	2 ¹ / ₂ - 14 or 2.5000 - 14	UNS	2A	...	...	...	...	...	...	2.4133	2B	...	...	...	...	...	...
	2 ¹ / ₂ - 18 or 2.5000 - 18	UNS	2A	...	...	...	...	...	...	2.4323	2B	...	...	...	...	...	...
	2 ³ / ₄ - 10 or 2.7500 - 10	UNS	2A	...	...	...	...	2.6763	0.0067	2.6290	2B	...	...	...	2.6837	0.0087	...
	2 ³ / ₄ - 14 or 2.7500 - 14	UNS	2A	0.0017	2.7483	2.7380	2.7019	2.6961	0.0058	2.6633	2B	...	...	...	2.7112	0.0076	...
	2 ³ / ₄ - 18 or 2.7500 - 18	UNS	2A	...	...	...	...	...	...	2.6823	2B	...	...	...	2.7208	0.0069	...

Table E-2
Limits as Listed in Table D-1 (Formerly 3B) Prior to ASME B1.1-2003 Edition (Cont'd)

Nominal Size and Threads/in.	Series Designation	External								Internal						
		Class	Allowance	Major Diameter		Pitch Diameter and Functional Diameter [Note (1)]		Toler- ance	Maximum UNR Minor Diameter (Ref.)	Minor Diameter			Pitch Diameter and Functional Diameter [Note (1)]			Minimum Major Diameter
				Max.	Min.	Max.	Min.			Class	Min.	Max.	Min.	Max.	Toler- ance	
3 - 10 or 3.0000 - 10	UNS	2A	...	...	...	...	...	...	2.8790	2B	...	...	...	...	...	...
3 - 14 or 3.0000 - 14	UNS	2A	...	...	...	...	...	...	2.9132	2B	...	...	...	...	...	...
3 - 18 or 3.0000 - 18	UNS	2A	...	...	...	...	...	...	2.9323	2B	...	...	...	...	...	...
3¼ - 10 or 3.2500 - 10	UNS	2A	0.0020	3.2480	3.2351	3.1830	3.1762	0.0068	3.1290	2B	...	...	...	...	...	...
3¼ - 14 or 3.2500 - 14	UNS	2A	...	...	...	...	3.1959	0.0059	3.1632	2B	...	...	...	3.2113	0.0077	...
3¼ - 18 or 3.2500 - 18	UNS	2A	...	...	...	...	3.2069	0.0054	3.1823	2B	...	...	...	3.2209	0.0070	...
3½ - 10 or 3.5000 - 10	UNS	2A	...	...	...	...	...	...	3.3789	2B	...	...	...	...	...	...
3½ - 14 or 3.5000 - 14	UNS	2A	...	...	...	...	...	...	3.4132	2B	...	...	...	...	...	...
3½ - 18 or 3.5000 - 18	UNS	2A	...	...	...	...	...	...	3.4322	2B	...	...	...	...	...	...
3¾ - 10 or 3.7500 - 10	UNS	2A	...	...	...	...	3.6760	0.0069	3.6289	2B	...	...	...	3.6940	0.0090	...
3¾ - 14 or 3.7500 - 14	UNS	2A	...	...	...	...	...	...	3.6632	2B	...	...	...	...	...	...
3¾ - 18 or 3.7500 - 18	UNS	2A	...	...	...	...	3.7067	0.0055	3.6822	2B	...	...	...	...	...	...
4 - 10 or 4.0000 - 10	UNS	2A	...	...	...	...	...	...	3.8768	2B	...	...	...	...	...	...
4 - 14 or 4.0000 - 14	UNS	2A	...	...	...	...	...	...	3.9132	2B	...	...	...	...	...	...
4¼ - 10 or 4.2500 - 10	UNS	2A	...	...	...	...	4.1759	0.0070	4.1289	2B	...	...	...	4.1941	0.0091	...
4¼ - 14 or 4.2500 - 14	UNS	2A	0.0018	4.2482	4.2379	4.2018	4.1956	...	4.1632	2B	...	...	...	4.2116	0.0080	...
4½ - 10 or 4.5000 - 10	UNS	2A	...	...	...	...	4.4259	0.0070	4.3789	2B	...	...	...	4.4441	0.0091	...
4½ - 14 or 4.5000 - 14	UNS	2A	0.0018	4.4982	4.4879	4.4518	4.4456	0.0062	4.4132	2B	...	...	...	4.4616	0.0080	...
4¾ - 10 or 4.7500 - 10	UNS	2A	...	...	...	...	...	...	4.6288	2B	...	...	...	4.6944	0.0094	...
4¾ - 14 or 4.7500 - 14	UNS	2A	...	...	...	...	4.6953	0.0064	4.6631	2B	...	...	...	4.7119	0.0083	...
5 - 10 or 5.0000 - 10	UNS	2A	...	...	...	...	...	...	4.8788	2B	...	...	...	...	...	...
5 - 14 or 5.0000 - 14	UNS	2A	...	...	...	...	4.9453	...	4.9131	2B	...	...	...	...	...	...

Table E-2
Limits as Listed in Table D-1 (Formerly 3B) Prior to ASME B1.1-2003 Edition (Cont'd)

Nominal Size and Threads/in.	Series Designation	External								Internal						
		Class	Allowance	Major Diameter		Pitch Diameter and Functional Diameter [Note (1)]		Maximum UNR Minor Diameter (Ref.)	Minor Diameter			Pitch Diameter and Functional Diameter [Note (1)]			Minimum Major Diameter	
				Max.	Min.	Max.	Min.		Tolerance	Class	Min.	Max.	Min.	Max.		Tolerance
5¼ - 10 or 5.2500 - 10	UNS	2A	...	...	...	...	5.1756	0.0072	5.1288	2B	...	...	...	...	...	...
5¼ - 14 or 5.2500 - 14	UNS	2A	...	...	...	...	...	...	5.1631	2B	...	...	...	...	...	...
5½ - 10 or 5.5000 - 10	UNS	2A	...	...	...	...	5.4256	0.0072	5.3788	2B	...	...	...	5.4444	0.0094	...
5½ - 14 or 5.5000 - 14	UNS	2A	...	...	...	...	...	...	5.4131	2B	...	...	...	5.4619	0.0083	...
5¾ - 10 or 5.7500 - 10	UNS	2A	...	...	...	...	5.6754	0.0074	5.6288	2B	...	...	...	5.6946	0.0096	...
5¾ - 14 or 5.7500 - 14	UNS	2A	0.0020	5.7480	5.7377	5.7016	5.6951	...	...	2B	...	...	...	5.7121	0.0085	...
6 - 10 or 6.0000 - 10	UNS	2A	...	...	...	...	...	...	5.8788	2B	...	...	...	...	...	...
6 - 14 or 6.0000 - 14	UNS	2A	...	...	...	...	...	...	5.9130	2B	...	...	...	...	...	...

GENERAL NOTES:

- (a) The limits listed in this Table are no longer considered standard and are for information only. They have been replaced because of calculation errors and a change in rounding methods.
- (b) Product threads, gages, or tooling that to conform or were generated using limits listed in this Table should be considered acceptable. When replacing, the new limits should be used.
- (c) It is recommended that all users prepare for the eventual adoption of only the values determined by use of the formulas in the body of this Standard and the employment of the rounding rules set forth by ASME B1.30.
- (d) The UNR minor diameter values listed were calculated based on formulas from previous editions of ASME B1.1. Due to a change in constants for calculations, these values will not be the same as values calculated using the corrected constants.

NOTE: (1) See para. 5.2.1 for functional diameter.

NONMANDATORY APPENDIX F

SPECIAL LENGTHS OF ENGAGEMENT SPECIFICATIONS AND DESIGNATIONS

NOTE: Determining product or manufacturing specifications for special lengths of engagements are application dependent and the responsibility of the designer of the parts. Therefore it is outside the scope of ASME B1.1 and was removed from the body of this Standard and placed in this Appendix for historical and reference purposes.

F-1 SPECIAL LENGTHS OF ENGAGEMENT, LE , SPECIFICATIONS

F-1.1 Long LE Using Gage Length, LG , Equal to LE

(a) *High-Strength Materials Using Standard Pitch Diameter Tolerances.* For applications of long length of engagement of mating parts involving very high-strength materials, increases in tolerances based on standard length of engagement may be detrimental. In these cases, the tolerances based on the standard length of engagement may be applied to increased length of engagement threads. This requires the GO thread gages to have a special length equal to the length of engagement.

(b) *Standard Bolt, Added Allowance in Tapped Hole, LE Increases.* In some cases where greater than standard length of engagement is required, it is desirable to use standard externally threaded parts with tolerances based on standard length of engagement. For example, in the case of a standard bolt assembled into a tapped hole in aluminum, the designation of the bolt thread will conform to that of a thread for a standard length of engagement.

To ensure proper assembly, the tapped hole thread into which the bolt is assembled must not interfere with the bolt thread. This could happen if no special provisions were made in the tapped hole thread due to the cumulative effect of lead variation on the bolt thread, inasmuch as the increased length of engagement exceeds the thickness of the GO thread gage used for acceptance of the bolt thread. To avoid this condition, an allowance should be provided in the tapped hole, the amount of which should be the diameter equivalent of the cumulative lead variation for the increased length of engagement, which is one-half the pitch diameter tolerance of the bolt thread allowed for the standard length of engagement. This requires the GO functional thread gage and GO plain

gage to have a special length equal to the length of engagement.

(1) EXAMPLE: 0.5000 13 UNC-SE2B; $LE = 1$ in. (2 diameters); assembled with standard bolt thread.

Add allowance, $EI = \frac{1}{2}Td_2$ for standard bolt thread. From Table 3, column 5, $\frac{1}{2}Td_2$ (standard) = 0.0025. Therefore, the thread is redesignated to indicate a nonstandard internal thread with the allowance of 0.0025 added to the basic size of 0.5000. New designation is 0.5025-13 UNS-SE2B. Allowance is also added to the standard minor diameter size limits and to the adjusted pitch diameter size limits. See para. F-2.1.

(c) *Standard Internal Thread, Added Allowance on External Thread, es , Increases.* In some cases where greater than standard length of engagement is required, it is desirable to use standard internally threaded parts with tolerances based on standard length of engagement. In these cases, an allowance should be added to the mating external thread.

(1) EXAMPLE: 0.3750-24-UNF-SE2A; $LE = 0.88$ in. (2.35 diameters); assembled with standard internal thread.

Add allowance equal to $\frac{1}{2}TD_2$ for standard internal thread. From Table 3, column 8, $\frac{1}{2}TD_2$ (standard) = 0.00245, which is rounded to 0.0025. Therefore, the thread is redesignated to indicate a nonstandard external thread with the allowance of 0.0025 subtracted from the basic size of 0.3750. New designation is 0.3725-24-UNS-SE2A. The added allowance is also subtracted from the standard major diameter size limits and from the adjusted pitch diameter size limits. See para. F-2.1.

F-1.2 Long Length of Engagement Using Standard Thread Gage Limits.

ASME B1.2 recommends the length of the GO gage approximate the length of engagement. However, it is sometimes more economical to accept these threads with GO thread gages made from standard gage blanks (refer to ASME B47.1), which have lengths approximating the standard lengths of engagement.

NOTE: When this is done, additional precautions are necessary to determine the effect of cumulative variation of lead and straightness of thread axis due to a long length of engagement.

If applicable, an additional allowance should be provided, preferably on the external thread, the amount of which should be the diameter equivalent of the cumulative lead variation for the increased length of engagement, equal to the sum of one-half the pitch diameter tolerances of the external and internal threads allowed for the standard length of engagement.

(a) EXAMPLE: 0.3750-24-UNF-2A; $LE = 0.88$ in. (2.35 diameters); with external and internal thread gages of standard length.

Add allowance equal to $\frac{1}{2}Td_2 + \frac{1}{2}TD_2$ for standard mating threads. From Table 3, column 5, $\frac{1}{2}Td_2$ (standard) = 0.0019. From Table 3, column 8, $\frac{1}{2}TD_2$ (standard) = 0.00245.

The sum of these, after rounding, is equal to 0.0044, which is the added allowance. Therefore, the thread is redesignated to indicate a nonstandard external thread, with the allowance of 0.0044 subtracted from the basic size of 0.3750. New designation is 0.3706-24 UNS-2A. The added allowance is also subtracted from the standard major diameter and pitch diameter size limits. See para. F-2.2.

F-2 METHOD OF DESIGNATING THREADS HAVING SPECIAL LENGTH OF ENGAGEMENT

In the assembly of threads in mating parts, the length of engagement varies according to the design requirements. It should be noted that the length of engagement is not necessarily the same as the full thread length provided on the part, but it is the length of assembled thread in the mating parts.

Where a standard series thread has a special length of engagement differing from that for which the standard pitch diameter tolerances are applicable as indicated in section 5, the thread class symbol is qualified by the addition of the letters SE (special engagement) preceding the class symbol. The specification of the special pitch diameter limits of size and the length of engagement, LE , rounded to a two-place decimal, are a requirement.

EXAMPLES:

(a) $\frac{1}{2}$ - 13 UNC-SE2A (23)

PD 0.4485 - 0.4431

LE 1.00

(b) $\frac{1}{4}$ - 24 UNS-SE3A (23)

Major diameter 0.2500 - 0.2428

PD 0.2229 - 0.2198

LE 0.88

F-2.1 Greater Than Standard Length Used

In some cases where greater than standard length of engagement is required, it is desirable to use standard externally threaded parts with tolerances based on standard length of engagement. For example, in the case of a standard bolt assembled into a tapped hole, the designa-

tion of the bolt thread will conform to that of a thread for a standard length of engagement.

The designation for the tapped hole thread should include the allowance in the basic size, the pitch diameter limits of size, and the length of gage, in addition to the information normally given. See para. F-1.1(b).

EXAMPLE: (requiring use of 1.00-long GO functional thread gage and GO plain gage)

0.5000 - 13 UNC-SE2B (21)

Minor diameter 0.420 - 0.437

PD 0.4525 - 0.4606

LG 1.00

Similarly, where greater than standard length of engagement is required, it is desirable to use standard internally threaded parts with tolerances based on standard length of engagement. Therefore, the external thread is provided with an added allowance. See para. F-1.1(c).

The designation for the external thread should include the added allowance in the basic size, the pitch diameter limits of size, and the length of gage, in addition to the information normally given.

EXAMPLE: (requiring use of 0.88-long GO functional thread gage and GO plain gage)

0.3750 - 24-UNF-SE2A (21)

Major diameter 0.3714 - 0.3642

PD 0.3443 - 0.3396

LG 0.88

F-2.2 Long Length. GO Functional Thread Gage, and GO Plain Ring Gage Used

When a long length of engagement is required and standard length GO functional thread gage and GO plain gage is used, the thread designation should indicate the thread modifications and a standard gage length, LG Std. See para. F-1.2.

EXAMPLES: (with additional allowance indicating use of standard length GO functional thread gage and GO plain gage)

(a) 0.5058-13 UNS-2B (22)

Minor diameter 0.423 - 0.440

PD 0.4558 - 0.4623

LG Std.

(b) 0.3706 - 24UNS-2A (22)

Major diameter 0.3695 - 0.3623

PD 0.3424 - 0.3386

LG Std.

F-2.3 Long Length of Engagement, High-Strength Materials Used

For applications of long length of engagement of mating parts involving very high-strength materials, increases in tolerances based on standard length of engagement may be detrimental. In these cases, the tolerances based on the standard length of engagement may be applied to increased length of engagement threads. This requires

the GO thread gages to have a special length equal to the length of engagement as specified. The designations for restricted applications should be qualified with the abbreviation SPL (special) as shown in the examples that follow. See [para. F-1.1\(a\)](#).

EXAMPLES: Requiring use of 1.00-long GO thread and GO plain gages:

(a) 0.500 - 20-UNF-3A SPL (21)

LG 1.00 SPL

(b) 0.500 - 20-UNF-3B SPL (21)

LG 1.00 SPL

NOTE: In drawings, tolerances tabulated for the standard length of engagement in this Standard shall apply over the full length of engagement.

INTENTIONALLY LEFT BLANK

B1 STANDARDS FOR SCREW THREADS

B1.1-2024	Unified Inch Screw Threads (UN, UNR, and UNJ Thread Forms)
B1.2-1983 (R2007)	Gages and Gaging for Unified Inch Screw Threads
B1.3-2007 (R2022)	Screw Thread Gaging Systems for Dimensional Acceptability: Inch and Metric Screw Threads (UN, UNR, UNJ, M, and MJ)
B1.5-1997 (R2009)	Acme Screw Threads
B1.7-2006 (R2021)	Screw Threads: Nomenclature, Definitions, and Letter Symbols
B1.8-1988 (R2021)	Stub Acme Screw Threads
B1.9-1973 (R2017)	Buttress Inch Screw Threads 7°/45° Form With 0.6 Pitch Basic Height of Thread Engagement
B1.10M-2004 (R2019)	Unified Miniature Screw Threads
B1.11-1958 (R2016)	Microscope Objective Thread
B1.12-1987 (R2023)	Class 5 Interference-Fit Thread
B1.13M-2005 (R2020)	Metric Screw Threads — M Profile
B1.16M-1984 (R2016)	Gages and Gaging for Metric M Screw Threads
B1.20.1-2013 (R2018)	Pipe Threads, General Purpose (Inch)
B1.20.3-1976 (R2023)	Dryseal Pipe Threads (Inch)
B1.20.5-1991 (R2019)	Gaging for Dryseal Pipe Threads (Inch)
B1.20.7-1991 (R2024)	Hose Coupling Screw Threads (Inch)
B1.21M-1997 (R2023)	Metric Screw Threads: MJ Profile
B1.22M-1985 (R2016)	Gages and Gaging for MJ Series Metric Screw Threads
B1.25-2019	Measurement Uncertainty Factors in the Calibration of Screw Thread Gages
B1.30-2002 (R2022)	Screw Threads — Standard Practice for Calculating and Rounding Dimensions

The ASME Publications Catalog shows a complete list of all the Standards published by the Society. For a complimentary catalog, or the latest information about our publications, call 1-800-THE-ASME (1-800-843-2763).

ASME Services

ASME is committed to developing and delivering technical information. At ASME's Customer Care, we make every effort to answer your questions and expedite your orders. Our representatives are ready to assist you in the following areas:

ASME Press	Member Services & Benefits	Public Information
<i>Codes & Standards</i>	Other ASME Programs	Self-Study Courses
Credit Card Orders	Payment Inquiries	Shipping Information
IMechE Publications	Professional Development	Subscriptions/Journals/Magazines
Meetings & Conferences	Short Courses	Symposia Volumes
Member Dues Status	Publications	Technical Papers

How can you reach us? It's easier than ever!

There are four options for making inquiries* or placing orders. Simply mail, phone, fax, or E-mail us and a Customer Care representative will handle your request.

<i>Mail</i>	<i>Call Toll Free</i>	<i>Fax—24 hours</i>	<i>E-Mail—24 hours</i>
ASME	US & Canada: 800-THE-ASME	973-882-1717	customercare@asme.org
150 Clove Road, 6th Floor	(800-843-2763)	973-882-5155	
Little Falls, New Jersey	Mexico: 95-800-THE-ASME		
07424-2139	(95-800-843-2763)		

*Customer Care staff are not permitted to answer inquiries about the technical content of this code or standard. Information as to whether or not technical inquiries are issued to this code or standard is shown on the copyright page. All technical inquiries must be submitted in writing to the staff secretary. Additional procedures for inquiries may be listed within.

ASME B1.1-2024

I S B N 978-0-7918-7662-6



9 780791 876626



M 0 2 8 2 4