



Designation: F436/F436M – 24

Standard Specification for Hardened Steel Washers Inch and Metric Dimensions¹

This standard is issued under the fixed designation F436/F436M; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

This standard has been approved for use by agencies of the U.S. Department of Defense.

1. Scope*

1.1 This specification covers the chemical, mechanical, and dimensional requirements for hardened steel washers for use with fasteners having nominal thread diameters of ¼ through 4 in. and M12 through M100. These washers are intended for general-purpose mechanical and structural use with bolts, nuts, studs, and other internally and externally threaded fasteners. These washers are suitable for use with fasteners covered in Specifications [A354](#), [A449](#), [A563](#), [A563M](#), [F959/F959M](#), and [F3125](#).

1.2 The washers are designated by *type* denoting the material, by *style* denoting the shape, and by inch or metric dimensions.

1.2.1 The types of washers covered are:

1.2.1.1 *Type 1*—Carbon steel.

1.2.1.2 *Type 3*—Weathering steel.

1.2.1.3 This specification provides for furnishing Type 3 to chemical composition or a Corrosion Index (CRI) of 6 or higher at the suppliers option.

1.2.2 The styles of washers covered are:

1.2.2.1 *Circular*—Circular washers in nominal sizes ¼ through 4 in. and M12 through M100 suitable for applications where sufficient space exists and angularity permits.

1.2.2.2 *Beveled*—Beveled washers are square or rectangular, in nominal sizes ½ through 1½ in., M12 through M16, with a beveled 1 to 6 ratio surface for use with American standard beams and channels.

1.2.2.3 *Clipped*—Clipped washers are circular or beveled for use where space limitations necessitate that one side be clipped.

1.2.2.4 *Extra Thick*—Extra thick washers are circular washers in nominal sizes ½ through 4 in., with a nominal thickness of ⅝ in. suitable for structural applications with oversized holes.

1.3 Terms used in this specification are defined in Terminology [F1789](#) unless otherwise defined herein.

1.4 The values stated in either inch-pound units for inch fasteners and SI units for metric fasteners and are to be regarded separately as standard. The values stated in each system may not be exact equivalents; therefore, each system shall be used independently of the other. Combining values from the two systems may result in non-conformance with the standard.

1.5 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety, health, and environmental practices and determine the applicability of regulatory limitations prior to use.*

1.6 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

2. Referenced Documents

2.1 *ASTM Standards:*²

[A354](#) Specification for Quenched and Tempered Alloy Steel Bolts, Studs, and Other Externally Threaded Fasteners

[A449](#) Specification for Hex Cap Screws, Bolts and Studs, Steel, Heat Treated, 120/105/90 ksi Minimum Tensile Strength, General Use

[A563](#) Specification for Carbon and Alloy Steel Nuts (Metric) [A0563_A0563M](#)

[A563M](#) Specification for Carbon and Alloy Steel Nuts (Metric) (Withdrawn 2021)³

[A588/A588M](#) Specification for High-Strength Low-Alloy Structural Steel, up to 50 ksi [345 MPa] Minimum Yield Point, with Atmospheric Corrosion Resistance

[A751](#) Test Methods and Practices for Chemical Analysis of Steel Products

¹ This specification is under the jurisdiction of ASTM Committee [F16](#) on Fasteners and is the direct responsibility of Subcommittee [F16.06](#) on Steel Washers and Rivets.

Current edition approved Nov. 1, 2024. Published November 2024. Originally approved in 1976. Last previous edition approved in 2019 as F436/F436M – 19. DOI: 10.1520/F0436_F0436M-24.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at www.astm.org/contact. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

³ The last approved version of this historical standard is referenced on www.astm.org.

*A Summary of Changes section appears at the end of this standard



A1059 Specification for Zinc Alloy Thermo-Diffusion Coatings (TDC) on Steel Fasteners, Hardware, and Other Products

B695 Specification for Coatings of Zinc Mechanically Deposited on Iron and Steel

F606/F606M Test Methods for Determining the Mechanical Properties of Externally and Internally Threaded Fasteners, Washers, Direct Tension Indicators, and Rivets

F959/F959M Specification for Compressible-Washer-Type Direct Tension Indicators for Use with Structural Fasteners, Inch and Metric Series

F1136/F1136M Specification for Zinc/Aluminum Corrosion Protective Coatings for Fasteners

F1470 Practice for Fastener Sampling for Specified Mechanical Properties and Performance Inspection

F1789 Terminology for F16 Mechanical Fasteners

F2329 Specification for Zinc Coating, Hot-Dip, Requirements for Application to Carbon and Alloy Steel Bolts, Screws, Washers, Nuts, and Special Threaded Fasteners

F3125 Specification for High Strength Structural Bolts and Assemblies, Steel and Alloy Steel, Heat Treated, Inch Dimensions 120 ksi and 150 ksi Minimum Tensile Strength, and Metric Dimensions 830 MPa and 1040 MPa Minimum Tensile Strength

G101 Guide for Estimating the Atmospheric Corrosion Resistance of Low-Alloy Steels

fasteners, may be either through hardened or carburized at the option of the manufacturer.

4.3 Protective Coatings:

4.3.1 Unless otherwise specified, washers shall be furnished “plain” with the “as-fabricated” surface finish without protective coatings.

4.3.2 When zinc-coated washers are required, the purchaser shall specify the zinc coating process, for example, hot-dip, mechanically deposited, Zinc/Aluminum Corrosion Protective Coating, or no preference.

4.3.2.1 When hot-dip is specified the washers shall be zinc coated by the hot-dip process in accordance with the requirements of Specification **F2329**.

NOTE 1—Applying a zinc coating to washers by the hot-dip galvanizing process can cause washers to bond to each other, resulting in a potential for bare (uncoated) surfaces, low coating thicknesses, and workmanship concerns. Suitable acceptance criteria should be agreed upon between the supplier and the purchaser at the time of ordering.

4.3.2.2 When thermo-diffusion is specified the washers shall be zinc coated by the thermo-diffusion process in accordance with the requirements of Class 25 of Specification **A1059**.

4.3.2.3 When mechanically deposited is specified the washers shall be zinc coated by the mechanical-deposition process in accordance with the requirements of Class 55 of Specification **B695**.

4.3.2.4 When Zinc/Aluminum Corrosion Protective Coating is specified, the washers shall be coated in accordance with the requirements of Grade 3 of Specification **F1136/F1136M**.

4.3.3 When the zinc coating process is not specified, the supplier may furnish zinc coated washers in accordance with the supplier’s choice of process from 4.3.2.1 through 4.3.2.4.

4.4 If washers are heat treated by a subcontractor, they shall be returned to the manufacturer for testing prior to shipment to the purchaser.

5. Chemical Composition

5.1 Type 1 washers shall conform to the chemical composition specified in **Table 1**.

5.2 Type 3 washers shall conform to the heat analysis specified in **Table 1**. Alternatively, at the suppliers option, Type 3 washers having a Copper minimum Heat Analysis of 0.25%, Phosphorous and Sulfur conforming to **Table 1** and a Corrosion Index of 6 or higher as calculated from the Heat Analysis as described in Guide **G101** Predictive method based on the data of Larabee and Coburn shall be accepted.

5.3 For Type 1 and 3 furnished to the Chemical Compositions in **Table 1**, Product Analysis may be made by the purchaser on finished washers representing each lot. The Chemical Composition shall conform to the requirements in **Table 1**, Product Analysis.

5.4 Product Analysis are not applicable to Type 3 washers furnished to a CRI of 6 or higher calculated from the Heat Analysis.

5.5 Chemical analyses shall be performed in accordance with Test Methods, Practices, and Terminology **A751**.

3. Ordering Information

3.1 Orders for hardened steel washers under this specification shall include the following:

3.1.1 ASTM designation and year of issue,

3.1.2 Quantity (number of pieces by size),

3.1.3 Type and Style (see 1.2.1 and 1.2.2),

3.1.3.1 Material type of washer (that is, Type 1 or Type 3),

3.1.3.2 When the type is not specified, either Type 1 or Type

3 washers may be supplied.

3.1.4 Coating type, if required (see 4.3),

3.1.4.1 When atmospheric corrosion resistance is required, Type 3 washers shall be specified by the purchaser.

3.1.5 Dimensions, nominal size, and other dimensions, if modified from those covered in this specification,

3.1.5.1 Standard thickness shall be supplied unless extra thick is specified.

3.1.6 Specify if inspection at point of manufacture is required,

3.1.7 Specify if test reports are required (see Section 13), and

3.1.8 Any Special or Supplementary requirements, including Surface Roughness (S1).

4. Materials and Manufacture

4.1 Steel used in the manufacture of washers shall be produced by the open-hearth, basic-oxygen, or electric-furnace process.

4.2 Washers up to and including 1½ in. for inch fasteners and M36 for metric fasteners, shall be through hardened. Washers over 1½ in. for inch fasteners and M36 for metric

TABLE 1 Chemical Requirements^A

Element	Composition, %	
	Type 1	Type 3 ^B
Phosphorus, max		
Heat analysis	0.040	0.040
Product analysis	0.050	0.045
Sulfur, max		
Heat analysis	0.050	0.050
Product analysis	0.060	0.055
Silicon		
Heat analysis	...	0.15–0.35
Product analysis	...	0.13–0.37
Chromium		
Heat analysis	...	0.45–0.65
Product analysis	...	0.42–0.68
Nickel		
Heat analysis	...	0.25–0.45
Product analysis	...	0.22–0.48
Copper		
Heat analysis	...	0.25–0.45
Product analysis	...	0.22–0.48

^A When providing Weathering Steels to a calculated corrosion index use the Legault-Leckie formula from Guide G101. Link to online calculator: http://www.astm.org/COMMIT/G01_G101Calcltr1100.xls

$$I = 26.01 (\% Cu) + 3.88 (\% Ni) + 1.20 (\% Cr) + 1.49 (\% Si) + 17.28 (\% P) - 7.29 (\% Cu) (\% Ni) - 9.10 (\% Ni) (\% P) - 33.39 (\% Cu)^2$$

^B Weathering steel washers may also be manufactured from any of the steels listed in Table 2 of Specification A588/A588M and F3125.

6. Mechanical Properties

6.1 Through hardened washers shall have a hardness of 38 to 45 HRC, except when zinc-coated by the hot-dip process, in which case they shall have a hardness of 26 to 45 HRC.

6.2 Carburized washers shall be carburized to a minimum depth of 0.015 in. (inch series) or 0.38 mm (metric series) and shall have a surface hardness of 69 to 73 HRA or 79 to 83 HR15N, except when zinc-coated by the hot-dip process, in which case they shall have a hardness of 63 to 73 HRA or 73 to 83 HR15N.

6.3 Carburized and hardened washers shall have a minimum core hardness of 30 HRC or 65 HRA.

7. Dimensions and Tolerances

7.1 All circular and clipped circular washers shall conform to the dimensions shown in Table 2 and Table 4 (inch washers) and Table 5 and Table 7 (metric washers).

7.2 All square beveled and clipped square beveled washers shall conform to the dimensions shown in Table 3 and Table 4 (inch washers) and Table 6 and Table 7 (metric washers). In addition, rectangular beveled and clipped rectangular beveled washers shall conform to the dimensions shown in the appropriate Table 3 and Table 4 (inch washers) or Table 6 and Table 7 (metric washers) except that one side may be longer than shown for the “A” dimension.

7.3 As a result of the punching process, the inside diameter of the washer generally consists of three distinct sections. On the punch entry side of the washer there is some drawing in of the material resulting in a rounded corner section, following which is a substantially parallel a burnished depth section, and finally at the exit side a tapered breakout may occur (see Fig. 1). The parallel sided burnished depth section of the washer inside diameter shall be within the limits specified in Table 2, however, the specified maximum inside diameter may be exceeded at the washer face on the breakout side by a maximum taper allowance of 25 % of the specified maximum washer thickness for each size.

8. Workmanship, Finish, and Appearance

8.1 Washers shall be free of excess mill scale, excess coatings and foreign material on bearing surfaces. Arc and gas cut washers shall be free of metal spatter.

9. Sampling and Number of Tests

9.1 Each lot shall be tested by the manufacturer prior to shipment in accordance with the lot control as described in 9.4.1 and 9.4.2.

9.1.1 When supplied by a source other than the manufacturer or processed by an outside supplier, the responsible party shall ensure that all tests have been performed and the washers conform to this specification.

9.2 When specified in the purchase order, the manufacturer shall furnish a test report for the lot as defined in 9.4.1 and Section 13.

9.3 When weathering steels are furnished to Corrosion Resistance Index, the CRI number shall be calculated for each heat.

9.4 Each production lot shall be sampled and tested after all manufacturing processes are completed and prior to shipment.

9.4.1 The lot, for purposes of selecting samples, shall consist of all washers offered for inspection and testing, at one time, that are the same type, style, nominal size, same raw material heat number, same nominal post treatment (heat treatment, coating or both) and surface finish.

9.4.2 Samples from each lot shall be selected at random and tested for each requirement in accordance with Guide F1470.

10. Test Methods

10.1 Hardness:



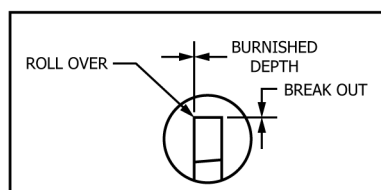


FIG. 1 Washer Inside Profile

TABLE 2 Hardened Circular, Clipped Circular, and Extra (Inch Washers)

NOTE 1—Other tolerances are as noted in Table 4.

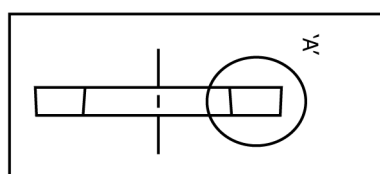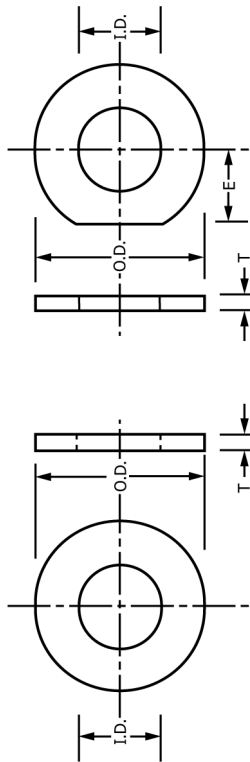

Nominal Washer ^D Size Inch	Clipped Circular		Outside Diameter (O.D.) Inch		Thickness Standard (T) Inch		Circular and Extra Thick		Clipped Minimum Edge Distance (E) ^A
	min	max	min	max	min	max	min	max	
1/4	0.281	0.313	0.593	0.657	0.051	0.080	...	...	0.219
5/16	0.344	0.376	0.656	0.720	0.051	0.080	...	...	0.281
3/8	0.406	0.438	0.781	0.845	0.051	0.080	...	...	0.344
7/16	0.469	0.501	0.890	0.954	0.051	0.080	...	...	0.406
1/2	0.531	0.563	1.031	1.095	0.097	0.177	0.305	0.375	0.438
5/8	0.625	0.657	1.156	1.220	0.110	0.177	0.305	0.375	0.500
3/4	0.688	0.720	1.281	1.345	0.122	0.177	0.305	0.375	0.563
7/8	0.813	0.845	1.436	1.500	0.122	0.177	0.305	0.375	0.656
1	0.938	0.970	1.718	1.782	0.136	0.177	0.305	0.375	0.781
1 1/8	1.063	1.126	1.937	2.063	0.136	0.177	0.305	0.375	0.875
1 1/4	1.188	1.251	2.187	2.313	0.136	0.177	0.305	0.375	1.000
1 3/8	1.375	1.438	2.437	2.563	0.136	0.177	0.305	0.375	1.094
1 1/2	1.500	1.563	2.687	2.813	0.136	0.177	0.305	0.375	1.219
1 3/4	1.625	1.688	2.937	3.063	0.136	0.177	0.305	0.375	1.313
2	1.875	1.938	3.312	3.438	0.178 ^B	0.28 ^B	0.305	0.375	1.531
2 1/4	2.125	2.188	3.687	3.813	0.178 ^B	0.28 ^B	0.305	0.375	1.750
2 1/2	2.375	2.438	3.937	4.063	0.24 ^C	0.34 ^C	0.305	0.375	2.000
2 3/4	2.625	2.688	4.437	4.563	0.24 ^C	0.34 ^C	0.313	0.375	2.188
3	2.875	2.938	4.937	5.063	0.24 ^C	0.34 ^C	0.313	0.375	2.406
3 1/4	3.125	3.188	5.437	5.563	0.24 ^C	0.34 ^C	0.313	0.375	2.625
3 1/2	3.375	3.500	5.875	6.125	0.24 ^C	0.34 ^C	0.313	0.375	2.875
3 3/4	3.625	3.750	6.375	6.625	0.24 ^C	0.34 ^C	0.313	0.375	3.063
4	3.875	4.000	6.875	7.125	0.24 ^C	0.34 ^C	0.313	0.375	3.313
	4.125	4.250	7.375	7.625	0.24 ^C	0.34 ^C	0.313	0.375	3.500

^A Clipped edge E shall be not closer than 7/8 of the bolt diameter from the center of the washer.


^B 3/16 in. nominal.

^C 1/4 in. nominal.

^D Nominal washer sizes are intended for use with fasteners of the same nominal thread size.

TABLE 3 Hardened Beveled Washers (Inch Washers)

NOTE 1—Tolerances are as noted in Table 4.

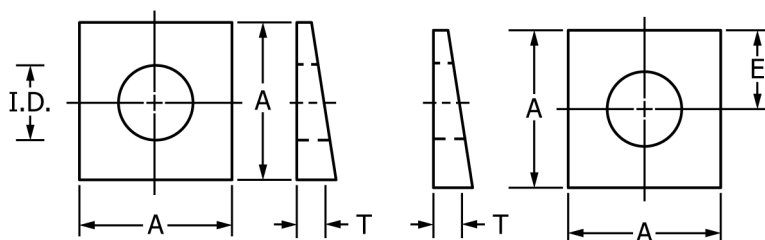

Bolt Size, in.	Square		Square Beveled and Clipped Square Beveled ^A		Square Clipped		Clipped
	Side Dimension (A), in.		Nominal Inside Diameter (I.D.), in.		Mean Thickness (T), in.	Slope or Taper in Thickness	Nominal Edge Distance (E), ^B in.
	min	max	min	max			
1/2	1.718	1.782	0.531	0.563	0.312	1:6	0.438
5/8	1.718	1.782	0.688	0.720	0.312	1:6	0.562
3/4	1.718	1.782	0.812	0.844	0.312	1:6	0.656
7/8	1.718	1.782	0.938	0.970	0.312	1:6	0.781
1	1.718	1.782	1.125	1.188	0.312	1:6	0.781
1 1/8	2.187	2.313	1.250	1.313	0.312	1:6	0.875
1 1/4	2.187	2.313	1.380	1.443	0.312	1:6	1.000
1 3/8	2.187	2.313	1.500	1.563	0.312	1:6	1.094
1 1/2	2.187	2.313	1.625	1.688	0.312	1:6	1.219

^A Rectangular beveled washers shall conform to the dimensions shown above, except that one side may be longer than that shown for the A dimension.

^B Clipped edge E shall not be closer than 7/8 of the bolt diameter from the center of the washer.

TABLE 4 Washer Dimensional Tolerances (Inch washers)

Dimensional Characteristics	<1 in. Nominal Size	1 through 1 1/2 in. Nominal Size	>1 1/2 through 3 in. Nominal Size	>3 in. Nominal Size
Flatness: max deviation from straightedge placed on cut side shall not exceed (in.)	0.010	0.015	0.020	0.032
Concentricity, in.: center of hole to outside diameter	0.030 FIR ^A	0.060 FIR ^A	0.090 FIR ^A	0.250 FIR ^A
Burr shall not project above immediately adjacent washer surface more than (in.)	0.010	0.015	0.020	0.025

^A Full indicator reading.

10.1.1 *Non-carburized Washers*—A minimum of two readings shall be taken 180° apart on at least one face at a minimum depth of 0.015 in. (inch series) or 0.38 mm (metric series).

10.1.2 *Carburized Washers*—A minimum of two readings shall be taken 180° apart on at least one face.

10.2 Hardness tests shall be performed in accordance with the Rockwell test method specified in Test Methods F606/F606M.

10.3 Corrosion Resistance Index:

10.3.1 The corrosion Resistance Index shall be calculated from the Heat Analysis in accordance with G101 Prediction Method based on the data of Larabee and Coburn.

11. Inspection

11.1 The manufacturer shall afford the purchaser's inspector all reasonable facilities necessary to satisfy him that the material is being produced and furnished in accordance with this specification. Mill inspection by the purchaser shall not interfere unnecessarily with the manufacturer's operations. All

tests and inspections shall be made at the place of manufacture, unless otherwise agreed to.

12. Rejection and Rehearing

12.1 Disposition of nonconforming washers shall be in accordance with Guide F1470 section titled "Disposition of Nonconforming Lots."


13. Test Reports

13.1 When specified on the purchase order, a manufacturer's test report that the washers have been manufactured and tested in accordance with this specification shall be furnished at the time of shipment.

13.2 Data contained in the test report shall include the nominal size, type, and lot number, as well as the results of hardness tests, coating thickness inspections, if applicable, and calculated Corrosion Resistance Index when type 3 is furnished to a Corrosion Resistance Index

TABLE 5 Dimensions of Circular Washers (Metric Washers)

NOTE 1—Other tolerances as noted in Table 7.

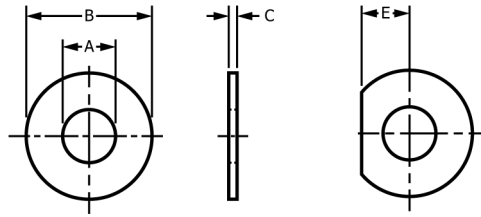


Metric Series							
Nominal Washer Size, mm ^A	Inside Diameter (A), mm		Outside Diameter (B), mm		Thickness (C), mm		Clipped Width (E), mm, min ^B
	min	max	min	max	min	max	
12	14.0	14.4	25.7	27.0	3.1	4.6	10.5
14	16.0	16.4	28.7	30.0	3.1	4.6	12.2
16	18.0	18.4	32.4	34.0	3.1	4.6	14.0
20	22.0	22.5	40.4	42.0	3.1	4.6	17.5
22	24.0	24.5	42.4	44.0	3.4	4.6	19.2
24	26.0	26.5	48.4	50.0	3.4	4.6	21.0
27	30.0	30.5	54.1	56.0	3.4	4.6	23.6
30	33.0	33.6	58.1	60.0	3.4	4.6	26.2
36	39.0	39.6	70.1	72.0	3.4	4.6	31.5
42	45.0	45.6	81.8	84.0	4.6	7.2	36.7
48	52.0	52.7	92.8	95.0	4.6	7.2	42.0
56	62.0	62.7	104.8	107.0	6.1	8.7	49.0
64	70.0	70.7	115.8	118.0	6.1	8.7	56.0
72	78.0	78.7	127.5	130.0	6.1	8.7	63.0
80	86.0	86.9	139.5	142.0	6.1	8.7	70.0
90	96.0	96.9	156.5	159.0	6.1	8.7	78.7
100	107.0	107.9	173.5	176.0	6.1	8.7	87.5

^A Nominal washer sizes are intended for use with fasteners of the same nominal thread diameter.

^B Washers may be clipped on one side not closer to the center of the washer than width E.

TABLE 6 Hardened Beveled Washers (Metric Washers)

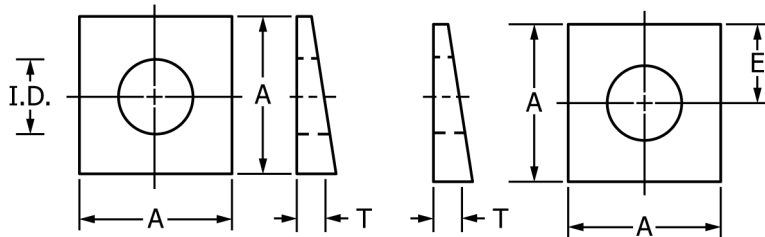

Nominal Washer Size, mm ^A	Inside Diameter (I.D.), mm		Side Width (A), mm		Thickness (T), mm		Clipped Width (E) mm, ^B min
	min	max	min	max	min	max	
12	14.0	14.4	43.0	45.0	7.5	8.5	10.5
14	16.0	16.4	43.0	45.0	7.5	8.5	12.2
16	18.0	18.4	43.0	45.0	7.5	8.5	14.0
20	22.0	22.5	43.0	45.0	7.5	8.5	17.5
22	24.0	24.5	43.0	45.0	7.5	8.5	19.2
24	26.0	26.5	43.0	45.0	7.5	8.5	21.0
27	30.0	30.5	56.0	58.0	7.5	8.5	23.6
30	33.0	33.6	56.0	58.0	7.5	8.5	26.2
36	39.0	39.6	56.0	58.0	7.5	8.5	31.5

^A Nominal washer sizes are intended for use with fasteners of the same nominal thread diameter.

^B Washers may be clipped on one side not closer to the center of the was than width E

**TABLE 7 Washer Dimensional Tolerances (Metric Washers)**

Dimensional Characteristics	12mm through 16 mm	>16 mm
	Nominal Size	Nominal Size
Flatness: max deviation from straightedge placed on cut side shall not exceed	<i>B</i>	<i>B</i>
Concentricity, in.: center of hole to outside diameter	0.6 mm FIR ^A	0.9 mm FIR ^A
Burr shall not project above immediately adjacent washer surface more than (mm)	0.25 mm	0.25 mm

^A Full indicator runout.^B Flat within 0.01mm/mm of Outside Diameter

14. Responsibility

14.1 The party responsible for the fastener shall be the organization that supplies the fastener to the purchaser.

15. Product Marking

15.1 Washers shall be marked with a symbol, or other distinguishing marks, to identify the manufacturer or private label distributor, as appropriate.

15.2 Additionally, washers shall be marked to identify their being metric size (metric series). Preferably, the metric marking shall be the symbol “M,” but may be of other distinguishing design as determined by the manufacturer.

15.3 Additionally, Type 3 weathering steel washers shall be identified with the symbol “3”.

15.4 Additional identification or distinguishing marks, or both, may be used by the manufacturer.

15.5 All marking symbols shall be depressed on one face of the washer.

15.6 Type and manufacturer’s or private label distributor’s identification shall be separate and distinct. The two identifications shall preferably be in different locations and, when on the same level, shall be separated by at least two spaces.

15.7 It is possible that during the clipping of circular washers the marking symbols may be removed. This is acceptable provided that the majority of washers in the lot still display the identification marks.

16. Package Marking

16.1 Each shipping unit shall include or be plainly marked with the following information:

16.1.1 ASTM designation, Type, and Style,

16.1.2 Nominal Size,

16.1.3 Name of the manufacturer or responsible party,

16.1.4 Number of pieces,

16.1.5 *Lot number*—Shipping units shall be marked with the lot number of the washers.

16.1.6 Purchase order number or other distinguishing information, when required by the customer, and

16.1.7 Country of origin, when required by the customer.

17. Keywords

17.1 carbon steel; steel; washers; weathering steel

SUPPLEMENTARY REQUIREMENTS

S1. Surface Roughness

S1.1 Washers shall have a multidirectional lay with a surface roughness not exceeding 750 $\mu\text{in.}$ (inch washers) or 19 μmm (metric washers) in height including any flaws in or on the surface.

S1.2 Burrs shall not exceed 0.01 in. (inch washers) or 0.25 mm (metric washers) in height.

SUMMARY OF CHANGES

Committee F16 has identified the location of selected changes to this standard since the last issue (F436/F436M – 19) that may impact the use of this standard. (Approved November 1, 2024.)

(1) Added **Note 1** to **4.3.2.1**.

ASTM International takes no position respecting the validity of any patent rights asserted in connection with any item mentioned in this standard. Users of this standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, are entirely their own responsibility.

This standard is subject to revision at any time by the responsible technical committee and must be reviewed every five years and if not revised, either reapproved or withdrawn. Your comments are invited either for revision of this standard or for additional standards and should be addressed to ASTM International Headquarters. Your comments will receive careful consideration at a meeting of the responsible technical committee, which you may attend. If you feel that your comments have not received a fair hearing you should make your views known to the ASTM Committee on Standards, at the address shown below.

This standard is copyrighted by ASTM International, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA 19428-2959, United States. Individual reprints (single or multiple copies) of this standard may be obtained by contacting ASTM at the above address or at 610-832-9585 (phone), or through the ASTM website (www.astm.org/contact). Permission rights to photocopy the standard may also be secured from the Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923, Tel: (978) 646-2600; <http://www.copyright.com/>